SIEMENS

Data sheet for SINAMICS G120X

Figure similar

MLFB-Ordering data **6SL3230-1YE30-0UF0**

Client order no. : Item no. :
Order no. : Consignment no. :
Offer no. : Project :
Remarks :

Rated data

Input

Number of phases	3 AC	
Line voltage	380 ... 480 V +10 % -20 %	
Line frequency	47 ... 63 Hz	
Rated voltage	**400V IEC**	**480V NEC**
Rated current (LO)	37.00 A	32.00 A
Rated current (HO)	33.00 A	28.00 A

Output

Number of phases	3 AC	
Rated voltage	**400V IEC**	**480V NEC**
Rated power (LO)	18.50 kW	25.00 hp
Rated power (HO)	15.00 kW	20.00 hp
Rated current (LO)	38.00 A	34.00 A
Rated current (HO)	32.00 A	27.00 A
Rated current (IN)	39.00 A	
Max. output current	51.30 A	
Pulse frequency	4 kHz	
Output frequency for vector control	0 ... 200 Hz	
Output frequency for V/f control	0 ... 550 Hz	

Overload capability

Low Overload (LO)

110% base load current IL for 60 s in a 300 s cycle time

High Overload (HO)

150% x base load current IH for 60 s within a 600 s cycle time

General tech. specifications

Power factor λ	0.90 ... 0.95
Offset factor cos φ	0.99
Efficiency η	0.98
Sound pressure level (1m)	70 dB
Power loss	0.500 kW
Filter class (integrated)	Unfiltered
EMC category (with accessories)	without

Ambient conditions

Standard board coating type	Class 3C3, according to IEC 60721-3-3: 2002
Cooling	Air cooling using an integrated fan
Cooling air requirement	0.055 m³/s (1.942 ft³/s)
Installation altitude	1000 m (3280.84 ft)

Ambient temperature

Operation	-20 ... 45 ℃ (-4 ... 113 ℉)
Transport	-40 ... 70 ℃ (-40 ... 158 ℉)
Storage	-25 ... 55 ℃ (-13 ... 131 ℉)

Relative humidity

Max. operation	95 % At 40 ℃ (104 ℉), condensation and icing not permissible

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Page 1 of 3

Generated Fri Jan 22 00:12:45 CET 2021

SIEMENS

Data sheet for SINAMICS G120X

MLFB-Ordering data **6SL3230-1YE30-0UF0**

Mechanical data

Degree of protection	IP20 / UL open type
Size	FSD
Net weight	17 kg (37.48 lb)
Width	200 mm (7.87 in)
Height	472 mm (18.58 in)
Depth	248 mm (9.76 in)

Inputs / outputs

Standard digital inputs

Number	6
Switching level: 0→1	11 V
Switching level: 1→0	5 V
Max. inrush current	15 mA

Fail-safe digital inputs

Number	1

Digital outputs

Number as relay changeover contact	2
Output (resistive load)	DC 30 V, 5.0 A
Number as transistor	0

Analog / digital inputs

Number	2 (Differential input)
Resolution	10 bit

Switching threshold as digital input

0→1	4 V
1→0	1.6 V

Analog outputs

Number	1 (Non-isolated output)

PTC/ KTY interface

1 motor temperature sensor input, sensors that can be connected: PTC, KTY and Thermo-Click, accuracy ±5 °C

Closed-loop control techniques

V/f linear / square-law / parameterizable	Yes
V/f with flux current control (FCC)	Yes
V/f ECO linear / square-law	Yes
Sensorless vector control	Yes
Vector control, with sensor	No
Encoderless torque control	Yes
Torque control, with encoder	No

Communication

Communication	PROFINET, EtherNet/IP

Connections

Signal cable

Conductor cross-section	0.15 ... 1.50 mm² (AWG 24 ... AWG 16)

Line side

Version	screw-type terminal
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

Motor end

Version	Screw-type terminals
Conductor cross-section	10.00 ... 35.00 mm² (AWG 8 ... AWG 2)

DC link (for braking resistor)

PE connection	Screw-type terminals

Max. motor cable length

Shielded	200 m (656.17 ft)
Unshielded	300 m (984.25 ft)

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Page 2 of 3

Generated Fri Jan 22 00:12:45 CET 2021

SIEMENS

Data sheet for SINAMICS G120X

MLFB-Ordering data   **6SL3230-1YE30-0UF0**

Converter losses to EN 50598-2*		Standards	

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-45.20 %

Compliance with standards	UL, cUL, CE, C-Tick (RCM), EAC, KCC, SEMI F47, REACH
CE marking	EMC Directive 2004/108/EC, Low-Voltage Directive 2006/95/EC

Diagram values:

I			
100%	407.2 W (1.55 %)	475.1 W (1.80 %)	591.5 W (2.25 %)
50%	257.7 W (0.98 %)	281.8 W (1.07 %)	318.1 W (1.21 %)
25%	206.8 W (0.79 %)	217 W (0.82 %)	
f	50%	90%	
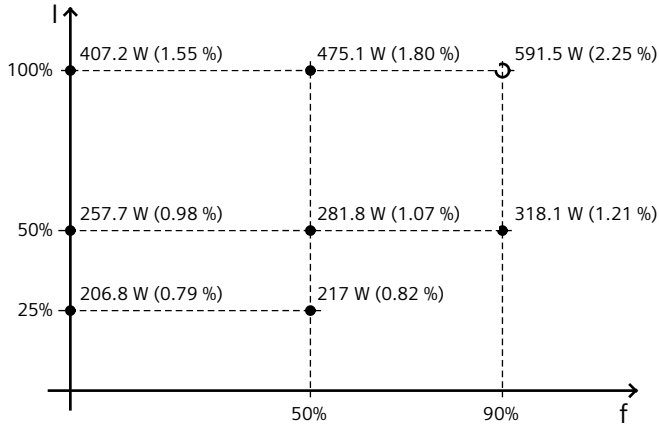
The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency(f). The values are valid for the basic version of the converter without options/components.

*converted values

Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

Page 3 of 3

Generated Fri Jan 22 00:12:45 CET 2021