

Description

The IRF7313PBF uses advanced trench technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with gate voltages as low as 2.5V. This device is suitable for use as a Battery protection or in other Switching application.

General Features

 $V_{DS} = 30V I_D = 6A$ $R_{DS(ON)} < 30m\Omega @ V_{GS} = 10 V$ $R_{DS(ON)} < 42m\Omega @ V_{GS} = 4.5V$

Application

Battery protection

Load switch

Uninterruptible power supply

Package Marking and Ordering Information


Product ID	Pack	Brand	Qty(PCS)
IRF7313PBF	SOP-8	HXY MOSFET	3000

Absolute Maximum Ratings@Tj=25°C(unless otherwise specified)

Symbol	Parameter	Rating	Units
V _{DS}	Drain-Source Voltage	30	V
V _{GS}	Gate-Source Voltage	<u>+</u> 20	V
I₀@T₄=25℃	Drain Current, V _{GS} @ 4.5V ³	6	A
I₀@T₄=70℃	Drain Current, V _{Gs} @ 4.5V ³	5	A
Ідм	Pulsed Drain Current ¹	30	A
PD@TA=25°C	Total Power Dissipation	2	W
Тята	Storage Temperature Range	-55 to 150	°C
TJ	Operating Junction Temperature Range	-55 to 150	°C
Rthj-a	Maximum Thermal Resistance, Junction- ambient ³	62.5	°C/W



SOP-8



Dual N-Channel MOSFET




Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Conditions		Min	Тур	Max	Units
STATIC P	PARAMETERS						
BV_{DSS}	Drain-Source Breakdown Voltage	I _D =-250μA, V _{GS} =0V		30			V
I _{DSS}	Zero Gate Voltage Drain Current	V_{DS} =30V, V_{GS} =0V				1	μA
			T_=55℃			5	μΛ
I _{GSS}	Gate-Body leakage current	$V_{DS}=0V, V_{GS}=\pm 20V$				±100	nA
V _{GS(th)}	Gate Threshold Voltage	$V_{DS}=V_{GS} I_{D}=250 \mu A$		1.2	1.8	2.4	V
I _{D(ON)}	On state drain current	V_{GS} =10V, V_{DS} =5V		30			А
	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =6A			25	30	mΩ
R _{DS(ON)}			T _J =125℃		40	48	11152
		V _{GS} =4.5V, I _D =5A	-		33	42	mΩ
g _{FS}	Forward Transconductance	$V_{DS}=5V, I_{D}=6A$			15		S
V _{SD}	Diode Forward Voltage	I _S =1A,V _{GS} =0V			0.76	1	V
l _s	Maximum Body-Diode Continuous Cur	rrent				2.5	Α
DYNAMI	C PARAMETERS						
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =15V, f=1MHz			255	310	pF
C _{oss}	Output Capacitance				45		pF
C _{rss}	Reverse Transfer Capacitance				35	50	pF
R _g	Gate resistance	V _{GS} =0V, V _{DS} =0V, f=1MHz		1.6	3.25	4.9	Ω
SWITCH	ING PARAMETERS						
Q _{g(10V)}	Total Gate Charge	-V _{GS} =10V, V _{DS} =15V, I _D =6A			5.2	6.3	nC
Qg _(4.5V)					2.55	3.2	nC
Q _{gs}	Gate Source Charge				0.85		nC
Q _{gd}	Gate Drain Charge				1.3		nC
t _{D(on)}	Turn-On DelayTime	V_{GS} =10V, V_{DS} =15V, R_L =2.5 Ω , R_{GEN} =3 Ω			4.5		ns
t _r	Turn-On Rise Time				2.5		ns
t _{D(off)}	Turn-Off DelayTime				14.5		ns
t _f	Turn-Off Fall Time				3.5		ns
t _{rr}	Body Diode Reverse Recovery Time	I _F =6A, dI/dt=100A/μs			8.5		ns
Q _{rr}	Body Diode Reverse Recovery Charge	_e I _F =6A, dl/dt=100A/μs			2.2		nC


- A. The value of $R_{\theta JA}$ is measured with the device mounted on $1in^2$ FR-4 board with 2oz. Copper, in a still air environment with $T_A = 25$ °C. The value in any given application depends on the user's specific board design.
- B. The power dissipation P_D is based on $T_{J(MAX)} = 150 \mbox{C},$ using $\,\leqslant\, 10s$ junction-to-ambient thermal resistance.
- C. Repetitive rating, pulse width limited by junction temperature $T_{J(MAX)}$ =150°C. Ratings are based on low frequency and duty cycles to keep initial T_J =25°C.
- D. The $R_{\theta JA}$ is the sum of the thermal impedence from junction to lead $R_{\theta JL}$ and lead to ambient.
- E. The static characteristics in Figures 1 to 6 are obtained using <300µs pulses, duty cycle 0.5% max.
- F. These curves are based on the junction-to-ambient thermal impedence which is measured with the device mounted on $1in^2$ FR-4 board with 2oz. Copper, assuming a maximum junction temperature of $T_{J(MAX)}=150$ °C. The SOA curve provides a single pulse ratin g.



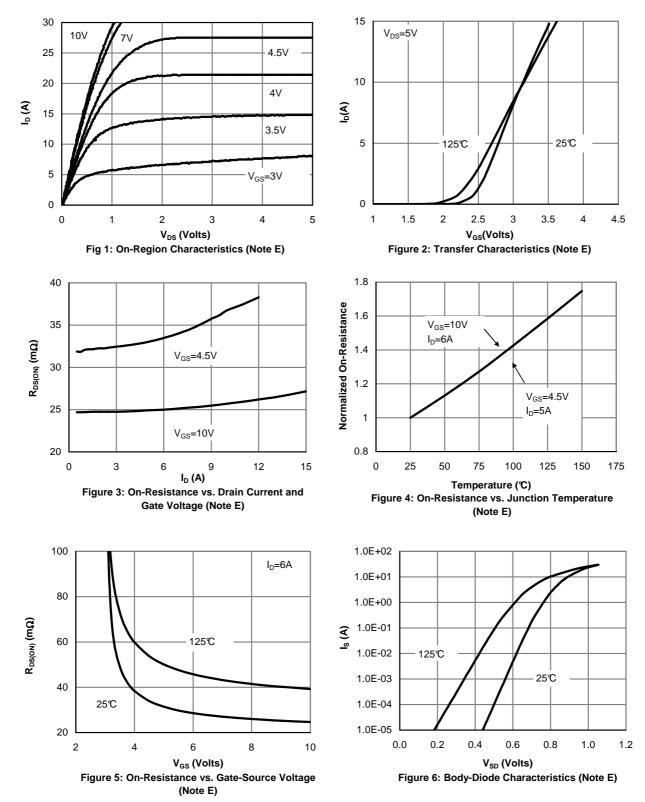



TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS



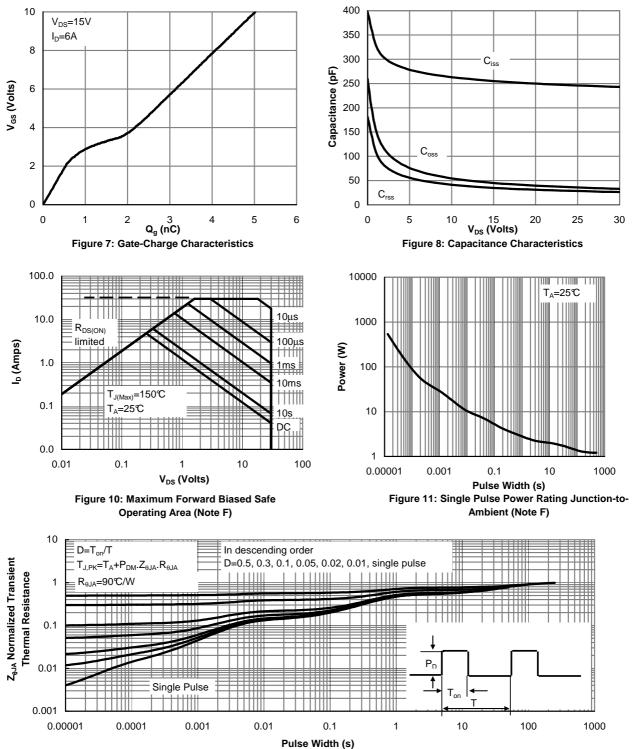


TYPICAL ELECTRICAL AND THERMAL CHARACTERISTICS







Gate Charge Test Circuit & Waveform

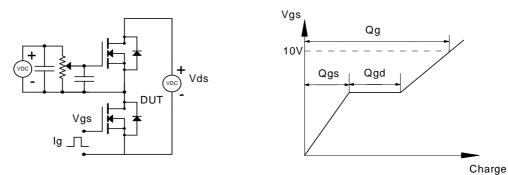



Resistive Switching Test Circuit & Waveforms







Unclamped Inductive Switching (UIS) Test Circuit & Waveforms







Diode Recovery Test Circuit & Waveforms










SOP-8 Package Outline Dimensions







Symbol	Dimensions In Millimeters		Dimensions In Inches		
Symbol	Min	Max	Min	Max	
Α	1.350	1.750	0.053	0.069	
A1	0.100	0.250	0.004	0.010	
A2	1.350	1.550	0.053	0.061	
b	0.330	0.510	0.013	0.020	
с	0.170	0.250	0.007	0.010	
D	4.800	5.000	0.189	0.197	
e	1.270 (BSC)		0.050 (BSC)		
E	5.800	6.200	0.228	0.244	
E1	3.800	4.000	0.150	0.157	
L	0.400	1.270	0.016	0.050	
θ	0 °	8°	0 °	8°	

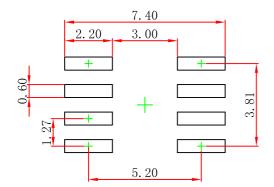

Note: 1.Controlling dimension: in millimeters.

2.General tolerance:± 0.05mm.
 3.The pad layout is for reference purposes only.



Attention

Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

• HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

• Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

• HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could

give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

• In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

• No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production.
HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.