3RA2220-0JB23-0AK6

Data sheet



Fuseless motor starter Reversing operation 600VAC Size S0 0.7-1A 110/120VAC 50/60HZ screw connection For 35 mm rail-mounting Type of coordination 2 IQ = 150 KA Also full fills type Of coordination 1 1NO+1NC (per contactor)

product brand name	SIRIUS
product designation	non-fused motor starter 3RA2
design of the product	reversing starter
manufacturer's article number	
 of the supplied contactor 	3RT2023-1AK60
 of the supplied circuit-breakers 	3RV2011-0JA10
 of the supplied RH assembly kit 	3RA2923-1BB1
 of the supplied busbar adapter 	3RA2922-1AA00
 of the supplied link module 	3RA2921-1AA00
 of the supplied standard mounting rail adapter 	3RA2922-1AA00
General technical data	
size of the circuit-breaker	S00
size of load feeder	S0
product extension auxiliary switch	Yes
insulation voltage with degree of pollution 3 at AC rated value	690 V
degree of pollution	3
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	6g / 11 ms
mechanical service life (switching cycles) of contactor typical	10 000 000
type of assignment	2
Substance Prohibitance (Date)	03/01/2017
Ambient conditions	
ambient temperature	
 during operation 	-20 +60 °C
during storage	-50 +80 °C
 during transport 	-55 +80 °C
Main circuit	
number of poles for main current circuit	3
design of the switching contact	electromechanical
adjustable current response value current of the current-dependent overload release	0.7 1 A
operating voltage	
• rated value	690 V
at AC-3 rated value maximum	690 V
operating frequency rated value	50 60 Hz
operational current at AC-3 at 400 V rated value	0.85 A
operating power at AC-3	
• at 400 V rated value	250 W

a at 500 V rated value	370 W
at 500 V rated value at 690 V rated value	370 W 550 W
Control circuit/ Control	000 VV
control supply voltage at AC • at 50 Hz rated value	110 V
at 50 Hz rated value at 50 Hz rated value	88 121 V
at 50 Hz rated value at 60 Hz rated value	120 V
at 60 Hz rated value at 60 Hz rated value	96 132 V
apparent holding power of magnet coil at AC	7 2 VA
inductive power factor with the holding power of the	0.28
coil	0.20
Auxiliary circuit	
number of NC contacts for auxiliary contacts	2
number of NO contacts for auxiliary contacts	2
Protective and monitoring functions	
trip class	CLASS 10
design of the overload release	thermal (bimetallic)
response value current of instantaneous short-circuit trip	13 A
unit	
UL/CSA ratings	
yielded mechanical performance [hp]	
 for 3-phase AC motor 	
— at 575/600 V rated value	0.5 hp
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
conditional short-circuit current (Iq)	
at 400 V according to IEC 60947-4-1 rated value	153 000 A
Installation/ mounting/ dimensions	
mounting position	vertical
fastening method	snap-on fastening on 35 mm standard rail
height	265 mm
width	90 mm
depth	120 mm
required spacing	
 for grounded parts 	
— forwards	10 mm
— backwards	0 mm
— upwards	30 mm
— at the side	9 mm
— downwards	10 mm
• for live parts	40
— forwards	10 mm
— backwards	0 mm
— upwards	30 mm
— downwards— at the side	10 mm 9 mm
	3 111111
Connections/ Terminals	construction of the section of the s
type of electrical connection for main current circuit	screw-type terminals
type of connectable conductor cross-sections • for main contacts stranded	1 10 mm² 2v (2.5 6 mm²)
	1 10 mm², 2x (2.5 6 mm²)
at AWG cables for main contacts connectable conductor cross-section for main contacts	2x (16 12), 2x (14 8) 1 6 mm²
finely stranded with core end processing	T O IIIIII
Safety related data	
B10 value with high demand rate according to SN 31920	1 000 000
proportion of dangerous failures with high demand rate according to SN 31920	73 %
protection class IP on the front according to IEC 60529	IP20

Certificates/ approvals

General Product Approval

For use in hazardous locations Declaration of Conformity

other

Confirmation







Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA2220-0JB23-0AK6

Cax online generator

 $\underline{\text{http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en\&mlfb=3RA2220-0JB23-0AK6}$

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0JB23-0AK6

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2220-0JB23-0AK6&lang=en


Characteristic: Tripping characteristics, I2t, Let-through current

https://support.industry.siemens.com/cs/ww/en/ps/3RA2220-0JB23-0AK6/char

Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA2220-0JB23-0AK6&objecttype=14&gridview=view1

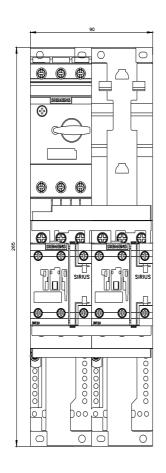

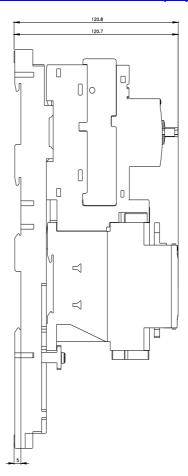

last modified:

12/15/2020 🖸