SMC/SMD Series



- High Peak Load Rating
- Single Outputs from 3.3 V to 54 V
- Active PFC
- Remote On/Off
- Optional Current Share
- SEMI F47 Compliant
- 3 Year Warranty

Specification

Input

Input Voltage Input Frequency Input Current Inrush Current Power Factor

• 90-264 VAC (120-370 VDC)

• 47-63 Hz

- 9 A at 90 VAC, 3.5 A at 230 VAC
- 40 A at 230 VAC
- EN61000-3-2 class A EN61000-3-2 class C for load ≥40%

Earth Leakage Current • Input Protection •

- <2.4 mA max at 264 VAC
- Fitted with a T10 A/250 V fuse

Output

Output Voltage Output Voltage Trim Initial Set Accuracy Minimum Load

Start Up Delay Start Up Rise Time Hold Up Time Line Regulation Load Regulation Over/Undershoot Transient Response

Ripple & Noise
Overvoltage Protection
Overtemperature
Protection

Overload Protection Short Circuit Protection Remote Sense

Remote On/Off

Current Share

See tables

- ±5% minimum
- ±1%
- 1% load required to meet specified ripple & noise and regulation
- 1.5 s at 230 VAC, 2.5 s at 110 VAC
- 40 ms typical
- 18 ms min at 120 VAC
- ±0.5%, low line to high line
- ±1%, 1-100% of load, see note 4
- 5% max
- 5% max deviation, 500 µs recovery to within 1% for a 50% load change
- See table
- Overvoltage Protection 110-130% recycle input to reset
 - >85 °C ambient with auto recovery (measured internally)
 - 110% to 135% with auto recovery
- Short Circuit Protection Trip and restart (Hiccup mode)
 - Compensates for up to 0.5 V line drop (not available with current share)
 - On = TTL Logic HIGH, or open circuit Off = TTL Logic LOW or short circuit
 - Optional single wire current share, will allow up to 4 units share within 10%, includes ORing diode

General

Efficiency Isolation

Switching Frequency Power Density Signals

Current Monitor

MTBF

80% min at 230 VAC, 70% min for Vo ≤5V

 3000 VAC Input to Output, 1500 VAC Input to Ground, 250 VDC Output to Ground

• 100 kHz PFC, 25 kHz PWM typical

6.93 W/In

 Green LED for Power On, Power Good TTL HIGH within 100-500 ms and LOW
 ≥1 ms before loss of regulation

 0.5 V to 3 V output voltage denoting 0-100% output current

 100 kHrs min to MIL-HDBK-217F at 25 °C, GB

+50 °C to 50% load at +70 °C

Environmental

Operating Temperature • 0 °C to +70 °C, derate from 100% load at

Cooling

Operating Humidity Storage Temperature Operating Altitude Shock

Vibration

 30 CFM for SMD U-channel versions (SMC Versions have integral fan)

• 5-90%, non-condensing

- -20 °C to +85 °C
- 3000 m
- 15 g (non-operation), 11 ms (half sine wave), 3 times for each axis
- 10-55 Hz (non-operation) 2 g, sweep time 3 mins, 60 mins/axis

EMC & Safety

Emissions

Harmonic Currents

Voltage Flicker ESD Immunity Radiated Immunity EFT/Burst Surge

Conducted Immunity Dips & Interruptions

Safety Approvals

• FCC Part 15 & CISPR 22 Class B conducted

 EN61000-3-2 class A EN61000-3-2 class C for load ≥40%

• EN61000-3-3

• EN61000-4-2, level 3 Perf Criteria A

• EN61000-4-3, 3 V/m Perf Criteria A

EN61000-4-4, level 2 Perf Criteria A

EN61000-4-5, installation class 3 Perf Criteria A

• EN61000-4-6, 3V Perf Criteria A

 EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms Perf Criteria A, B, B

 UL60950, CSA C22.2 No. 950, EN60950, CE Mark LVD, SEMI F47 Compliant (high line only) at 100% rated power output, CE & UKCA meets all applicable directives & legislation.

Models and Ratings

SMC/SMD Series

Output Power	Output Voltage ⁽³⁾ Preset	Output Current		Ripple	Model
		Maximum	Peak(1)	& Noise ⁽²⁾	Number
264 W	3.3 V	80.00 A	120.00 A	75 mV	SMC500PS03-C
400 W	5.0 V	80.00 A	120.00 A	75 mV	SMC500PS05-C
500 W	12.0 V	41.67 A	75.00 A	120 mV	SMC500PS12-C
	15.0 V	31.00 A	56.00 A	150 mV	SMC500PS15-C
	18.0 V	27.78 A	50.00 A	180 mV	SMC500PS18-C
	24.0 V	20.83 A	37.50 A	240 mV	SMC500PS24-C
	27.0 V	18.50 A	33.33 A	270 mV	SMC500PS27-C
	36.0 V	13.89 A	25.00 A	360 mV	SMC500PS36-C
	48.0 V	10.42 A	18.75 A	480 mV	SMC500PS48-C
	54.0 V	9.25 A	16.67 A	540 mV	SMC500PS54-C
297 W	3.3 V	90.00 A	135.00 A	100 mV	SMC600PS03-C
450 W	5.0 V	90.00 A	135.00 A	100 mV	SMC600PS05-C
600 W	12.0 V	50.00 A	75.00 A	120 mV	SMC600PS12-C
	15.0 V	40.00 A	56.00 A	150 mV	SMC600PS15-C
	18.0 V	33.00 A	50.00 A	180 mV	SMC600PS18-C
	24.0 V	25.00 A	37.50 A	240 mV	SMC600PS24-C
	27.0 V	22.22 A	33.33 A	270 mV	SMC600PS27-C
	36.0 V	16.67 A	25.00 A	360 mV	SMC600PS36-C
	48.0 V	12.50 A	18.75 A	480 mV	SMC600PS48-C
	54.0 V	11.10 A	16.67 A	540 mV	SMC600PS54-C


Notes

- 1. This peak can be taken for 500 µs only, average power should not exceed the maximum power.
- 2. Ripple & Noise is measured using 0.1 μF ceramic and 22 μF electrolytic capacitor, 20 MHz bandwidth.
- 3. Alternative output voltages available, consult sales.
- 4. Load regulation increases to 2% for 0-100% load change.
- 5. For output currents >50 A, please utilise remote sense to meet regulation ratings.
- 6. Available for OEM quantities, contact Sales.

Options

- For U-channel version replace 'SMC' in the part number with 'SMD' and remove '-C' e.g. SMD600PS12 (See Derating Curve Note 1.)
- Constant current limit (95-100%) add suffix '-B' (not available on 3.3 V or 5.0 V models), OEM quantities contact Sales.
- Current share and internal ORing diode add suffix '-I' to model number, remote sense not available on '-I' models, OEM quantities contact Sales.
- Optional IEC320 inlet replace suffix '-C' with '-D'. Not available for SMD models.


Derating Curve

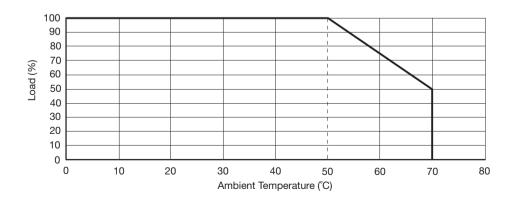


Notes

1. SMD units require 30 CFM forced air cooling.

SMC with integral fan

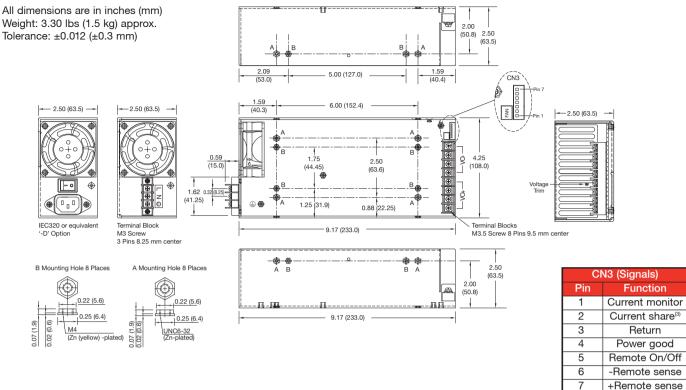


SMD U-Channel

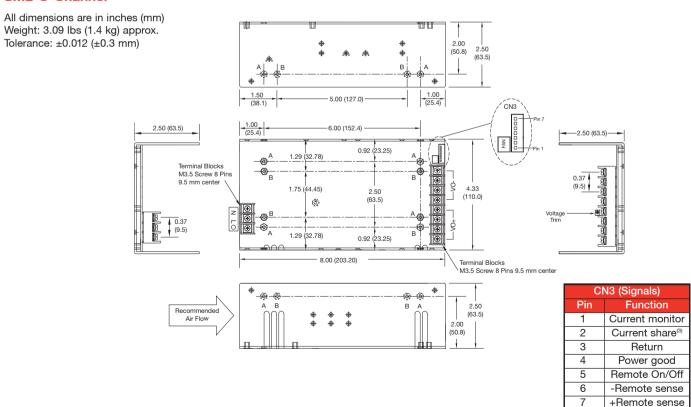

Notes


- 1. Logic connector CN3 mates with JST XHP-7 or equivalent and JST SXH-002T-P0.6 crimp terminals.
- 2. Fan connector mates with JST XHP-2 or equivalent and JST SXH-002T-P0.6 crimp terminals. Output is 12 VDC/160 mA
- 3. Current share not available with constant current models.
- 4. Maximum mounting screw penetration: 0.2 (5.00) on bottom side and 0.25 (6.30) on both sides.
- 5. Maximum screw terminal torque: Input: 7 Ibin (0.8 Nm), Output: 15.7 Ibin (1.8 Nm)

Remote Sense

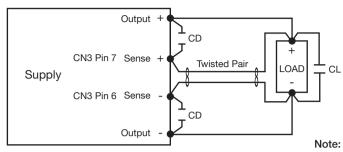

- 1. CL is 47 µF electrolytic capacitor.
- 2. CD is 0.1 µF ceramic capacitor.


Remote On/Off

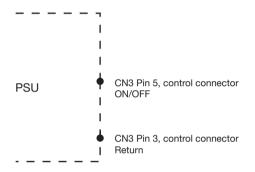

Note:

- 1. Applying <0.3 V or short between pins 5 and 3 turns the output OFF.
- 2. Applying >4.5 V or open circuit between pins 5 and 3 turns output ON.

Power Good

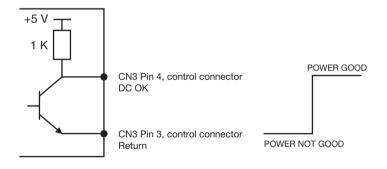

Parallel Connection with Current Share Option

