

BL-2835R650-20


+1


Features:

- 1. Emitted Color: Red.
- 2. Lens Appearance: Water Clear.
- 3. 3.5x2.8x0.65mm standard package.
- 4. Suitable for all SMT assembly methods.
- 5. Compatible with infrared and vapor phase reflow solder process.
- 6. Compatible with automatic placement equipment.
- 7. This product doesn't contain restriction Substance, comply ROHS standard.

Applications:

- 1. Automotive lighting.
- 2. Backlighting: LCDs, Key pads advertising.
- 3. Status indicators: Consumer & industrial electronics.
- 4. General use.

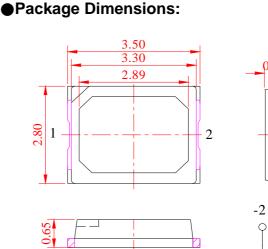



NOTES:

- 1.All dimensions are in millimeters (inches).
- 2. Tolerance is ± 0.10 mm (0.004") unless otherwise specified.
- 3. Specifications are subject to change without notice.

● Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	Rating	Unit
Power Dissipation	Pd	375	mW
Forward Current	I _F	150	mA
Peak Forward Current *1	I _{FP}	250	mA
Reverse Volage	V _R	5	V
Operating Temperature	Topr	-40 °C ~85 °C	-
Storage Temperature	Tstg	-40° C ~100° C	-
Soldering Temperature	Tsol	See Page6	-

 ${\rm *\,1}$ Condition for I_{\rm FP} is pulse of 1/10 duty and 3 msec width.




BL-2835R650-20


• Electrical and optical characteristics(Ta=25 $^{\circ}$ C)						
Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
Forward Voltage	Vf	I _F =150mA	1.6	-	2.5	V
Luminous Intensity	lv	I _F =150mA	-	3200	-	mcd
Reverse Current	I _R	V _R =5V	-	-	10	μΑ
Peak Wavelength	λρ	I _F =150mA	650	655	660	nm
Dominant Wave Length	λd	I _F =150mA	-	-	-	nm
Spectral Line Half-width	Δλ	I _F =150mA	-	20	-	nm
Veiwing Angle	2θ _{1/2}	I _F =150mA	-	120	-	deg


Photosynthetic Photon Flux efficiency


Parameter	Symbol	Condition	Min.	Тур.	Max.	Unit
PPF		I _F =150mA	-	0.31	-	µmol/s
PPF/W		I _F =150mA	-	1.40	-	µmol/s/W
Power		I _F =150mA	-	80	-	mW


• Typical Electro-Optical Characteristics Curves


















BL-2835R650-20

Tapping and packaging specifications(Units: mm)

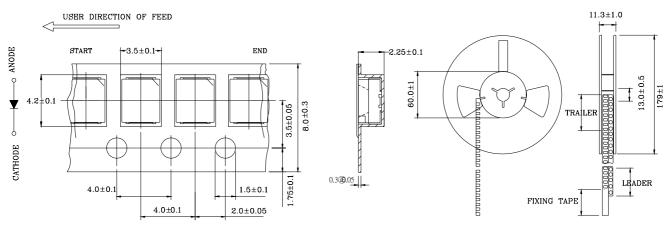

NOTE:2000 PCS PER REEL

Package Method:(unit:mm)

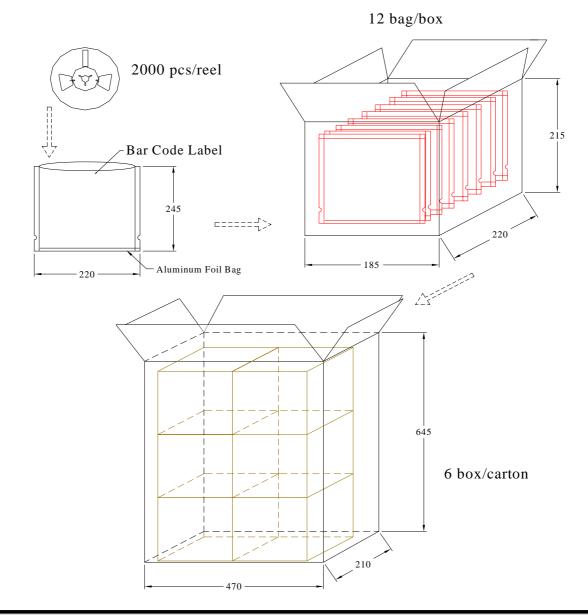

Ver1.1 Page 3 of 8



Bin Limits

Intensity Bin Limits (At 150mA)

BIN CODE	Min. (mcd)	Max. (mcd)
Y	2400	3700
Z	3700	5550

Tolerance for each Bin limit is \pm 15 %.





BL-2835R650-20

Reliability		Γ			
Classification	Test Item	Reference Standard	Test Conditions	Result	
	Operation Life	MIL-STD-750:1026	Connect with a power If=150mA		
		MIL-STD-883:1005	Ta=Under room temperature	0/20	
		JIS-C-7021 :B-1	Test time=1,000hrs		
	High		Ta=+65℃±5℃		
	Temperature	MIL-STD-202:103B	RH=90%-95%	0/20	
Endurance	High Humidity	JIS-C-7021 :B-11	Test time=240hrs	0/20	
Test	Storage				
Test	High		High Ta=+85℃±5℃		
	Temperature	MIL-STD-883:1008 JIS-C-7021 :B-10	Test time=1,000hrs	0/20	
	Storage	JIS-C-7021 :B-10			
	Low		Low Ta=-35℃ ±5℃		
	Temperature JIS-C-7021 :B-12		Test time=1,000hrs		
	Storage				
	Temperature	MIL-STD-202:107D	-35℃ ~ +25℃ ~ +85℃ ~ +25℃		
	Cycling	MIL-STD-750:1051	60min 20min 60min 20min	0/20	
		MIL-STD-883:1010	Test Time=5cycle	0/20	
		JIS-C-7021 :A-4			
	Thermal Shock	MIL-STD-202:107D	-35℃±5℃ ~+85℃±5℃		
		MIL-STD-750:1051	20min 20min	0/20	
		MIL-STD-883:1011	Test Time=10cycle		
	Solder	MIL-STD-202:201A	Preheating :		
	Resistance	MIL-STD-202.201A MIL-STD-750:2031	140° C - 160 $^{\circ}$ C , within 2 minutes.		
		JIS-C-7021 :A-1	Operation heating :	0/20	
		JIS-C-7021 .A-1	260°C (Max.), within 10seconds. (Max.)		

• Judgment criteria of failure for the reliability


Measuring items	Symbol	Measuring conditions	Judgement criteria for failure
Forward voltage	V _F (V)	I _F =150mA	Over Ux1.2
Reverse current	I _R (uA)	V _R =5V	Over Ux2
Luminous intensity	lv (mcd)	I _F =150mA	Below SX0.5

Note: 1.U means the upper limit of specified characteristics. S means initial value.

2.Measurment shall be taken between 2 hours and after the test pieces have been returned to normal ambient conditions after completion of each test.



●IR-Reflow

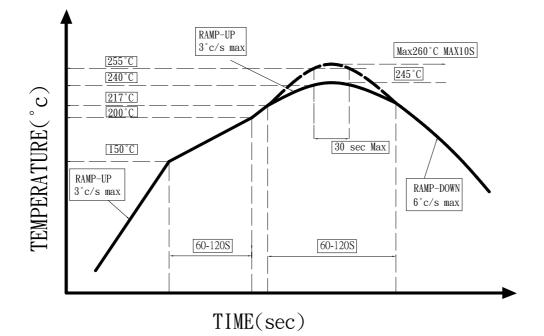

- 1. Avoid any external stress applied to the resin while the LEDs are at high temperature, especially during soldering.
- 2、Avoid rapid cooling or any excess vibration during temperature ramp-down process
- Although the soldering condition is recommended above, soldering at the lowest possible temperature is feasible for the LEDs

●IRON Soldering 350°C Within 3 sec, one time only.




Handling Precautions

Compare to epoxy encapsulant that is hard and brittle, silicone is softer and flexible. Although its characteristic significantly reduces thermal stress, it is more susceptible to damage by external mechanical force.

As a result, special handling precautions need to be observed during assembly using silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED.


- 1. Handle the component along the side surfaces by using forceps or appropriate tools.(pic.1)
- 2. Do not directly touch or handle the silicone lens surface. It may damage the internal circuitry. (pic.2,pic.3)
- 3. Do not stack together assembled PCBs, containing exposed LEDs. Impact may scratch the silicone lens or damage the internal circuitry. (pic.4)
- 4. The outer diameter of the SMD pickup nozzle should not exceed the size of the LED to prevent air leaks. The inner diameter of the nozzle should be as large as possible. (pic.5)
- 5. A pliable material is suggested for the nozzle tip to avoid scratching or damaging the LED surface during pickup. (pic.5)
- 6. The dimensions of the component must be accurately programmed in the pick-and-place machine to insure precise pickup and avoid damage during production. (pic.5)




Pic.1













Notes for designing:

Care must be taken to provide the current limiting resistor in the circuit so as to drive the LEDs within the rated figures. Also, caution should be taken not to overload LEDs with instantaneous voltage at the turning ON and OFF of the circuit.

When using the pulse drive care must be taken to keep the average current within the rated figures. Also, the circuit should be designed so as be subjected to reverse voltage when turning off the LEDs.

Storage:

In order to avoid the absorption of moisture, it is recommended to solder LEDs as soon as possible after unpacking the sealed envelope.

If the envelope is still packed, to store it in the environment as following:

- (1) Temperature : 5°C-30°C(41°F)Humidity : RH 60% Max.
- (2) After this bag is opened, devices that will be applied to infrared reflow, vapor-phase reflow, or equivalent soldering process must be:
- a. Completed within 24 hours.
- b. Stored at less than 20% RH.
- (3) Devices require baking before mounting, if: 2a or 2b is not met.
- (4) If baking is required, devices must be baked under below conditions: 48 hours at 60°C±5°C.

Package and Label of Products:

- (1) Package: Products are packed in one bag of 2000 pcs (one taping reel) and a label is attached on each bag.
- (2) Label:

■ 佰鴻工業股份有限公司 • BRIGHT LED ELECTRONICS CORP.		BRIGHT LED LOGO
Part No.:BL-Hxxxx- TRB ← 		Part No. Quantity BIN.
Sealing date:xxxxx <	<u>X</u>	Sealing Date <u>XX XX XX</u> Year Month Day

Manufacture Location