

General Description

This product family offers state of the art performance. It is designed for high frequency applications where high efficiency and high reliability are required.

Features


- Low conduction loss due to low VF
- Extremely low switching loss by tiny Qc
- Highly rugged due to better surge current
- Industrial standard quality and reliability


Applications

- UPS
- Power Inverter
- High performance SMPS
- Power factor correction

Ordering Part Number	Package	Marking]
HC3D05120E	TO-252-2L	HC3D05120E	







Maximum Ratings (at Tj = 25 °C, unless otherwise specified)

Parameter	Symbol	Value	Unit
Repetitive Peak Reverse Voltage	Vrrm	1200	V
Surge Peak Reverse Voltage	Vrsm	1200	V
DC Peak Reverse Voltage	Vr	1200	V
Continuous Forward Current			
Tc = 25°C Tc = 135°C Tc = 160°C	lF	18 9 5	A
Repetitive Peak Forward Surge Current $Tc = 25^{\circ}C, t_{p}=10ms, Half Sine Pulse$ $Tc = 110^{\circ}C, t_{p}=10ms, Half Sine Pulse$	Ifrm	31 23	A
Non-Repetitive Forward Surge Current $Tc = 25^{\circ}C, t_{p}=10ms, Half Sine Pulse$ $Tc = 110^{\circ}C, t_{p}=10ms, Half Sine Pulse$	IFSM	45 35	A
i²dt value Tc = 25°C,t _P =10ms,Half Sine Pulse Tc = 110°C,t _P =10ms,Half Sine Pulse	∫ i²dt	10 6	A²s
Power dissipation Tc = 25°C Tc = 110°C	Ptot	97 42	W
Operating junction Range	Tj	-55 to +175	°C
Storage temperature Range	Tstg	-55 to +150	°C

Thermal Resistance

Parameter	Symbol	Value	Unit
Thermal resistance, junction – case.	RthJC	1.55	°C/W



			Value			
Parameter	Symbol				Unit	Test Condition
		min.	typ.	max.		
						I⊧=5A
Forward Voltage	VF	-	1.4	1.7	V	Tj=25°C
		-	2.0	-		Tj=175°C
						V _R =1200V
Reverse Current	IR	-	-	100	μA	Tj=25°C
		-	-	200		Tj=175°C
						V ≈=800V,Tj=25 ℃
Total Capacitive Charge	Qc	-	24	-	nC	$Q_C = \int_0^{V_R} C(V) dV$
						Tj =25 ℃, f=1MHz
	С	-	336	-	pF	VR=0V
Total Capacitance		-	23	-		VR=400V
		-	18	-		Vr=800V

Electrical Characteristic (at Tj = 25 °C, unless otherwise specified)

Characteristics Curve:



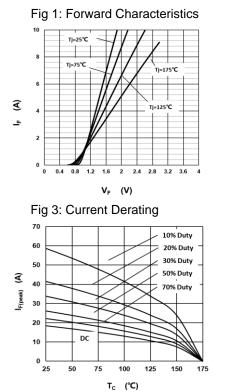


Fig 2: Reverse Characteristics















Fig 5: Capacitance vs. Reverse Voltage 350 300 250 200 C (pF) 150 100 50 0 0.1 10 100 1 1000 V_R (V)
















Package Dimensions

Package TO-252-2L




h



-	
-++-	- <u>1</u> +
+	
	+

项目	规范(mm)			
	MIN	MAX		
A	6.50	6.70		
A1	5.16	5.46		
В	9.77	10.17		
B1	6.00	6.20		
B2	2.60	3.00		
B3	0.70	0.90		
С	0.45	0.61		
D	2.20	2.40		
E	2.186	2.386		
F1	0.67	0.87		
F2	0.76	0.96		
Н	0.00	0.30		
h	0.00	0.127		
L	6.50	6.70		
φP	1.10	1.30		



Attention

Any and all HUA XUAN YANG ELECTRONICS products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life-support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your HUA XUAN YANG ELECTRONICS representative nearest you before using any HUA XUAN YANG ELECTRONICS products described or contained herein in such applications.

• HUA XUAN YANG ELECTRONICS assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein.

• Specifications of any and all HUA XUAN YANG ELECTRONICS products described or contained herein stipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms and states that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.

■ HUA XUAN YANG ELECTRONICS CO.,LTD. strives to supply high-quality high-reliability products. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could

give rise to accidents or events that could endanger human lives, that could give rise to smoke or fire, or that could cause damage to other property. When designing equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.

■ In the event that any or all HUA XUAN YANG ELECTRONICS products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.

• No part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of HUA XUAN YANG ELECTRONICS CO.,LTD.

Information (including circuit diagrams and circuit parameters) herein is for example only ; it is not guaranteed for volume production.
HUA XUAN YANG ELECTRONICS believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

Any and all information described or contained herein are subject to change without notice due to product/technology improvement, etc. When designing equipment, refer to the "Delivery Specification" for the HUA XUAN YANG ELECTRONICS product that you intend to use.