


Minos High Power Products

Ultrafast Soft Recovery Diode, 16A

Features:

- ① Ultrafast Recovery
- ② 175°C operating junction temperature
- ③ High frequency operation
- ④ Low power loss, less RFI and EMI
- ⑤ Low IR value
- ⑥ High surge capacity
- ⑦ Epitaxial chip construction

Product Summary	
V _R	200V
I _{F(AV)}	8*2A
t _{rr}	20ns

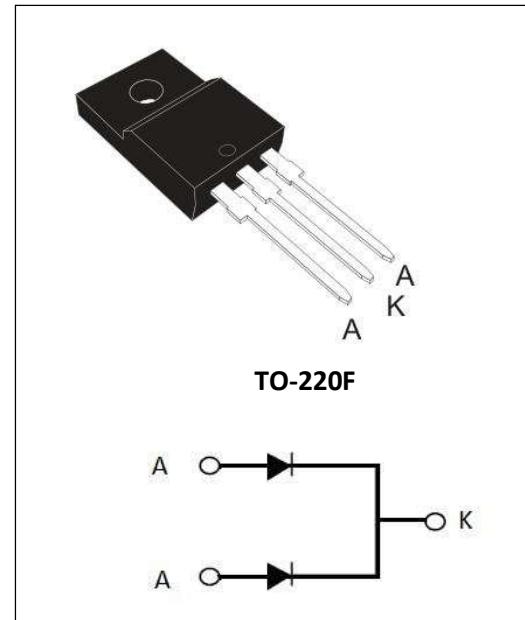

Description/Applications

These diodes are optimized to less losses and EMI/RFI in high frequency power conditioning system. The soft recovery behavior of the diodes offers the need as snubber in most applications. These devices are ideally suited for HF welding power converters and other applications where the switching losses are not significant portion of the total losses.



Absolute Maximum Ratings				
Parameter	Symbol	Test Conditions	Values	Units
Repetitive peak reverse voltage	V _{RRM}		200	V
Continuous forward current	I _{F(AV)}	T _c =110°C	16	A
Single pulse forward current	I _{FSM}	T _c =25°C	72	
Maximum repetitive forward current	I _{FRM}	Square wave, 20kHz	64	
Operating junction	T _j		175	°C
Storage temperatures	T _{stg}		-55 to +175	°C

Electrical characteristics (Ta=25°C unless otherwise specified)


Parameter	Symbol	Test Conditions	Min	Typ.	Max.	Units
Breakdown voltage Blocking voltage	V _{BR} , V _R	I _R =100μA	200			V
Forward voltage (Per Diode)	V _F	I _F =8A		0.98	1.15	
		I _F =8A, T _j =125°C		0.9	1.05	
Reverse leakage current(Per Diode)	I _R	V _R =V _{RRM}			10	μA
		T _j =150°C, V _R =200V			100	
Reverse recovery time(Per Diode)	t _{rr}	I _F =0.5A, I _R =1A, I _{RR} =0.25A		25	35	ns
		I _F =1A, V _R =30V, di/dt =200A/us		20	30	

Thermal characteristics

Paramter	Symbol	Typ	Units
Junction-to-Case	R _{θJC}	4.2	°C/W

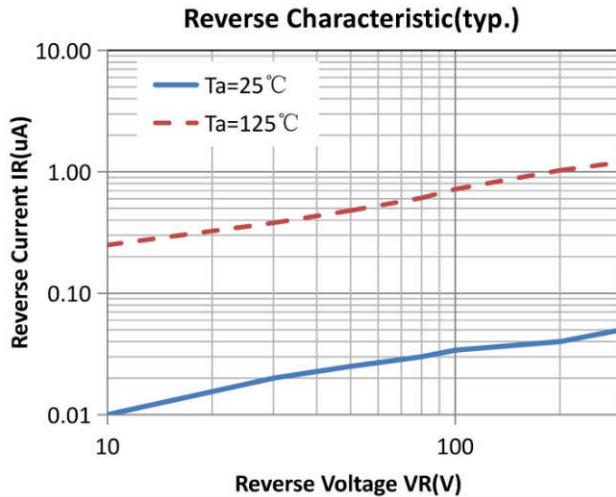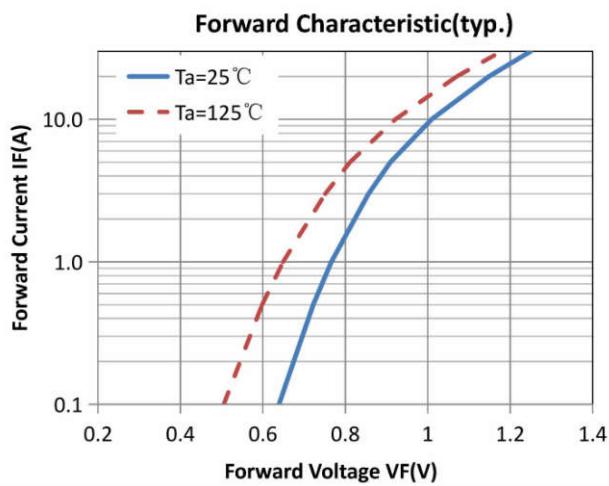Electrical performance (typic)


Package Information

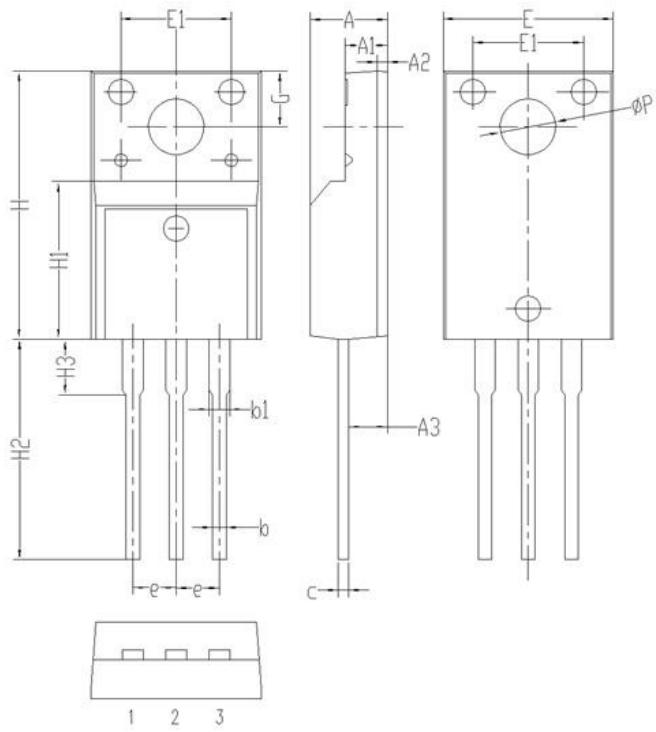

Symbol	Dimensions(millimeters)	
	Min.	Max.
A	4.35	4.75
A1	2.30	2.70
A2	0.40	0.80
A3	2.10	2.50
b	0.60	1.00
b1	1.00	1.40
c	0.30	0.70
e	2.30	2.70
E	9.80	10.2
E1	6.30	6.70
H	15.6	16.0
H1	8.80	9.20
H2	12.9	13.5
H3	3.10	3.50
G	3.10	3.50
ΦP	3.10	3.50

TO-220F PACKAGE



迈诺斯科技

MUR1620CT

NOTE:

1. Exceeding the maximum ratings of the device in performance may cause damage to the device, even the permanent failure, which may affect the dependability of the machine. Please do not exceed the absolute maximum ratings of the device when circuit designing.
2. When installing the heat sink, please pay attention to the torsional moment and the smoothness of the heat sink.
3. MOSFETs is the device which is sensitive to the static electricity, it is necessary to protect the device from being damaged by the static electricity when using it.
4. Shenzhen Minos reserves the right to make changes in this specification sheet and is subject to change without prior notice.

CONTACT:

深圳市迈诺斯科技有限公司（总部）

地址：深圳市福田区华富街道田面社区深南中路4026号田面城市大厦22B-22C

邮编：518025

电话：0755-83273777