

CC6101

Chopper Stabilized, High Precision

Latch Hall Effect Switch

General Description

CC6101 (Latch Hall effect sensor IC) is fabricated from advanced BICMOS technology, which has extremely temperature-stable and stress-resistant performance, especially suited for operation over extended temperature ranges (up to 150°C). CC6101 use Dynamic Offset Cancellation and Crosschip patented temperature compensation technology, which reduces the residual offset voltage normally caused by package stress, temperature dependencies and thermal stresses, etc..... make product has extremely high consistent on Magnetic sensibility.

CC6101 includes a voltage regulator, a Hall-voltage generator, a small-signal amplifier, chopper stabilization, a Schmitt trigger, and a short-circuit protected open-drain(OD) output to sink up to 30 mA. A south polarity magnetic field of sufficient strength is required to turn the output on (CC6101TO). A north polarity field of sufficient strength is necessary to turn the output off (CC6101TO). Internal regulator permits operation with supply voltage in the range of 2.5~28V.

CC6101 is available in TO-92S and TSOT23-3 packages. The operating temperature range is from -40~150°C.


Features

- ◆ Symmetric Switch Point
- ◆ Operation Voltage Range: 2.5~28V
- ◆ VDD Over Voltage Protection 30V
- ◆ High Chopper stability with good consistent
- ◆ Reverse Supply Voltage Protection:-40V
- ◆ Superior Temperature Stability, higher to 150°C
- ◆ Output Short-circuit Protection (30mA)
- ◆ Small Package Size (TO-92S / TSOT23-3 package)
- ◆ Solid-state Reliability
- ◆ HBM ESD 4000V

Application

- ◆ BLDC Motor Commutation
- ◆ Speed Detection
- ◆ Linear Position Detection
- ◆ Angular Position Detection



Function Block Diagram

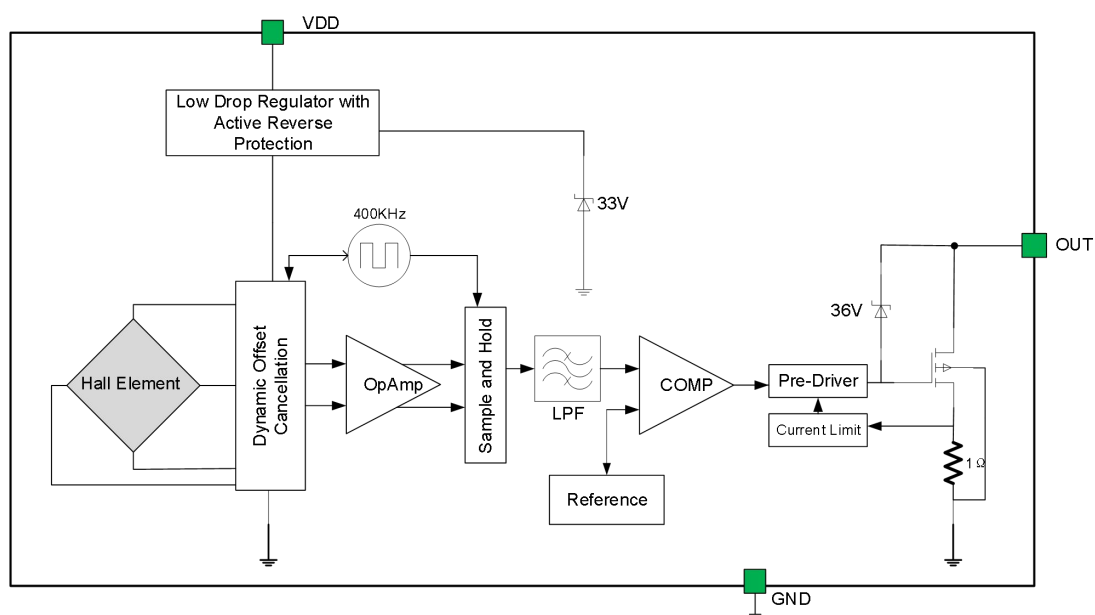

Ordering Information



Part No.	Packing Form	Package Code
CC6101TO	bulk, 1000 pcs/bulk	TO (TO-92S)
CC6101ST	tape reel, 3000 pcs/reel	ST (TSOT23-3)

Output vs. Magnetic Pole

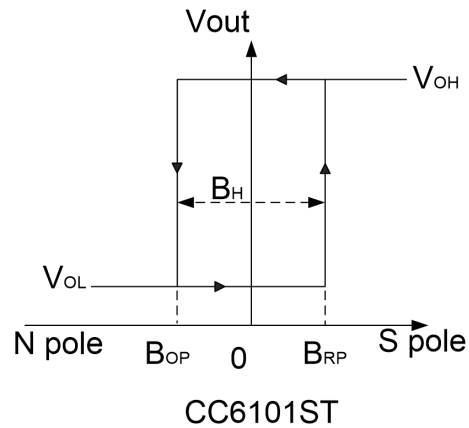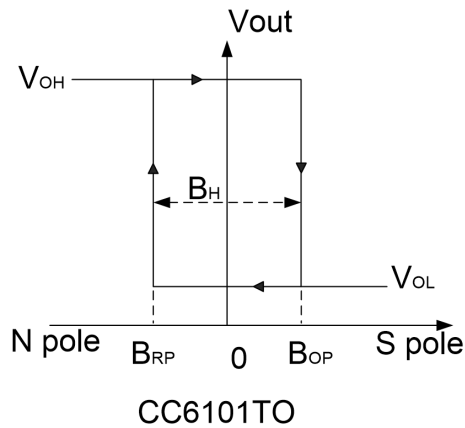

Note: Magnetic field need to be settled to top marking direction

PIN Configurations

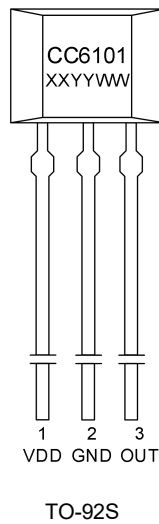

Pin Name	Number(TO-92S)	Number(TSOT23-3)	Function
VDD	1	1	Supply Voltage
GND	2	3	Ground
OUT	3	2	Output

Absolute Maximum Ratings

Parameter	symbol	value	unit
Supply Voltage	V_{DD}	30	V
Reverse Voltage	V_{RDD}	-40	V
Continuous Output Current	I_{OUT}	30	mA
Output pin withstand voltage	V_{OUT}	30	V
Junction Temperature	T_J	150	°C
Storage Temperature	T_S	-50~160	°C
Operation Temperature	T_A	-40~150	
Magnetic Flux Density	B	Unlimited	Gauss
ESD Susceptibility	HBM	4000	V

Note: Exceeding the absolute maximum ratings may cause permanent damage. Exposure to absolute-maximum rated conditions for extended periods may degrade device reliability.

Electrical Parameters


Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Supply Voltage	V_{DD}	-	2.5	-	28	V
Supply Current	I_{DD}	25°C, $V_{DD}=12V$	-	2	-	mA
Output V_{SAT} (sink)	V_{SAT}	$I_{OUT}=20mA$	-	-	0.4	V
Output Current Limit	I_{LIM}	-	30	-	60	mA
Output Rise Time	t_r	$R_L=820\Omega$, $C_L=20pF$	-	0.2	-	us
Output Fall Time	t_f	$R_L=820\Omega$, $C_L=20pF$	-	0.1	-	us
Reverse Current	I_{RDD}	$V_{DD}=-40V$	-	-	-5	mA

Magnetic Specifications

Parameter	Symbol	Condition	Min	Typ.	Max	Unit
Operate Point	B_{OP}	25°C	15	30	45	Gauss
Release Point	B_{RP}	25°C	-45	-30	-15	Gauss
Hysteresis	B_{HYS}	25°C	50	60	70	Gauss


Note: 1mT=10Gauss=100e

Typical Application Circuit

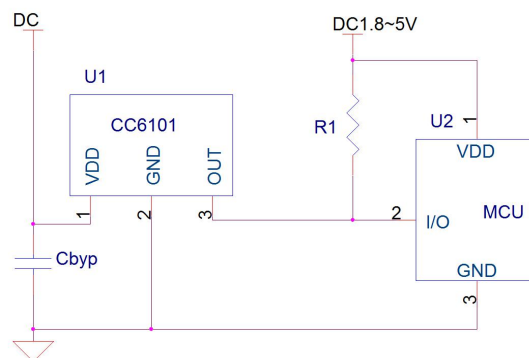


CC6101 Application


Waveform

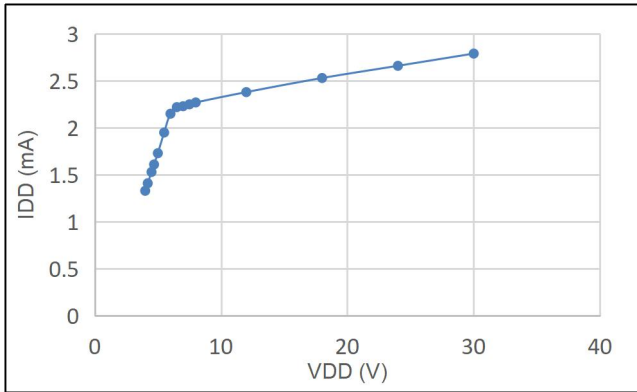

IDD vs. VDD

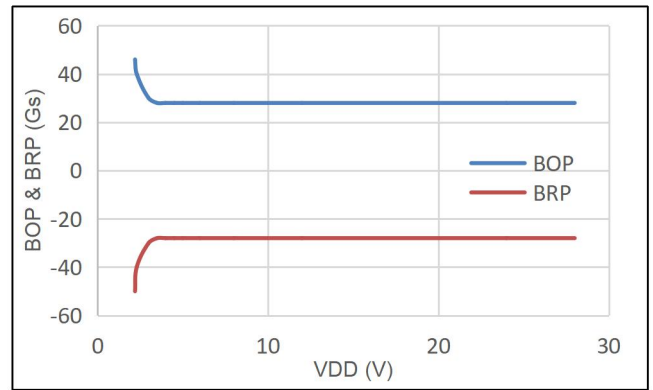


B vs. VDD

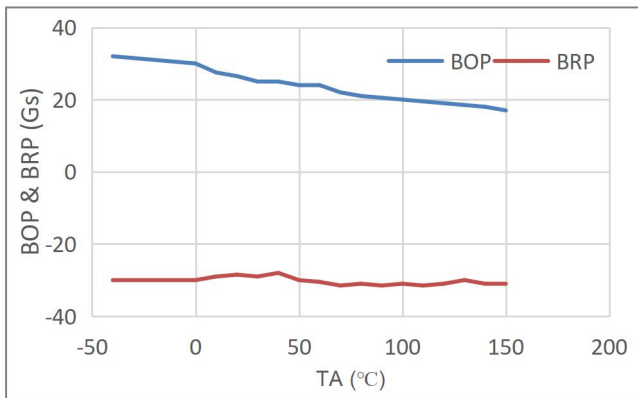

B vs. T_A


Package Information

1) TO-92S package

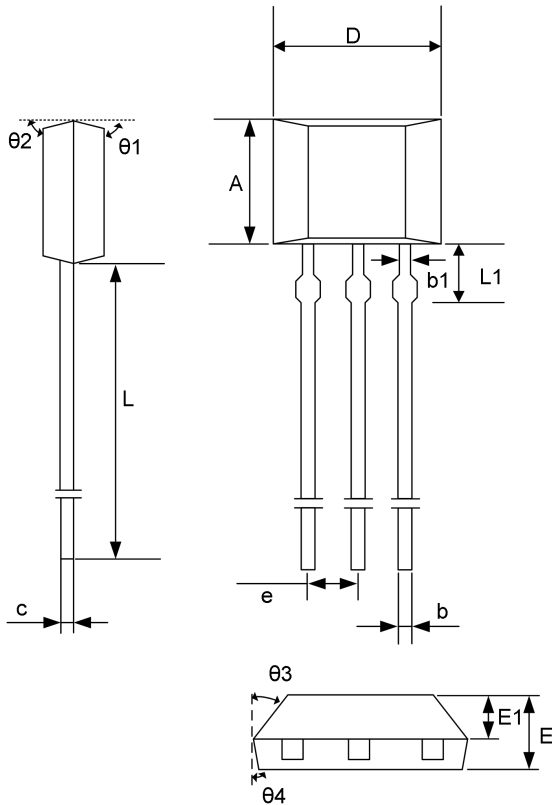

Symbol	Millimeter		
	Min	Typical	Max
A	2.90	3.10	3.30
b	0.35	0.39	0.56
b1	-	0.449	-
c	0.36	0.38	0.51
D	3.9	4.0	4.1
e	-	1.27	-
e1	-	2.54	-
E	1.42	1.535	1.65
E1	0.675	0.763	0.875
L	13.5	14.5	15.5
L1	1.33	1.565	1.73
θ_1	-	5.5°	-
θ_2	-	4°	-
θ_3	-	45°	-
θ_4	-	2.5°	-

Hall Plate Location

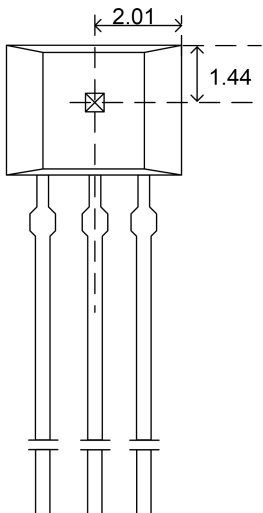

Notes:

All dimensions are in millimeters

Marking:

1st Line: CC6101 - Name of the device




2nd Line: XXYYWW

XX – assembler code


YY - assembly year (last 2 digits)

WW - assembly week number

2) TSOT23-3 package

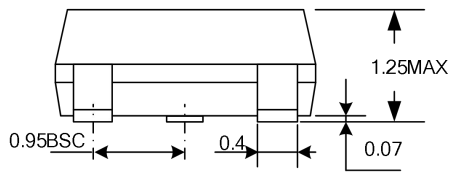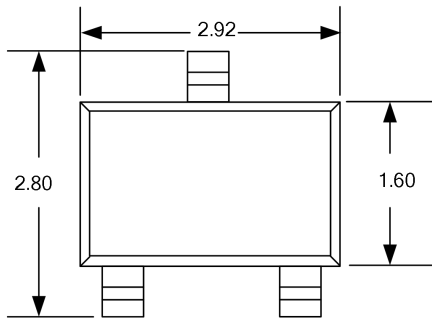

Hall Plate Location

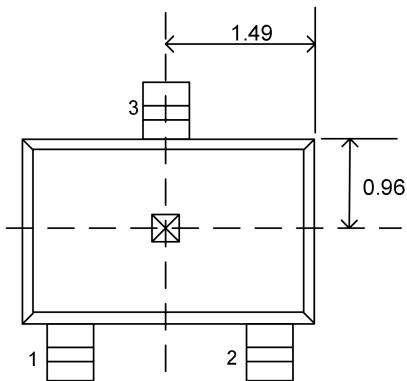

Notes:

1. All dimensions are in millimeters

Marking:

1st Line: 6101 - Name of the device

CrossChip

CrossChip Microsystems Inc. was founded in 2013, is a national high-tech enterprise, engaged in integrated circuit design and sales. The company has strong technical strength, has more than 50 kinds of patents, mainly used in Hall sensor signal processing, with the following product lines:

- ✓ High precision linear Hall sensor
- ✓ All kinds of Hall switches
- ✓ Single phase motor drive
- ✓ Single chip current sensor
- ✓ AMR Magnetoresistance sensor

Contact us

Chengdu

Address: 4th floor, unit 2, building 3, No. 88, Tianchen Road, Gaoxinxi Zone, Chengdu, Sichuan Province

Tel: + 86 - 28 - 87787685

Email: support@crosschipmicro.com

Website: <http://www.crosschipmicro.com>

Shenzhen

Address: 605 room, 6F, Beike building, NO.18 Keyuan Rd, Yuehai Street, Nanshan District, Shenzhen

Shanghai

Address: Makeblock, 3 / F, magic square community, 4476 Huyi Road, Jiading District, Shanghai

