SOT-23

1. BASE
2. EMITTER
3. COLLECTOR

MARKING: 2F

Features

- Epitaxial planar die construction
- Complementary NPN Type available(MMBT2222A)

Maximum Ratings

(Ratings at 25℃ ambient temperature unless otherwise specified.)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-60	V
V_{CEO}	Collector-Emitter Voltage	-60	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-600	mA
P_C	Total Device Dissipation	250	mW
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	500	℃/W
T_J	Junction Temperature	150	℃
T_{stg}	Storage Temperature	-55 to +150	℃

Electrical Characteristics

(Ratings at 25℃ ambient temperature unless otherwise specified).

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	I_C=-10μA,I_E=0	-60			V
Collector-emitter breakdown voltage	$V_{(BR)CEO*}$	I_C=-10mA,I_B=0	-60			V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	I_E=-10μA,I_C=0	-5			V
Collector cut-off current	I_{CBO}	V_{CB}=-50V,I_E=0			-20	nA
Base cut-off current	I_{EBO}	V_{CE}=-3V, I_C =0			-10	nA
Collector cut-off current	I_{CEX}	V_{CE}=-30 V, $V_{BE(off)}$ =-0.5V			-50	nA
DC current gain	$h_{FE(1)}$	V_{CE}=-10V,I_C=-150mA	100		300	
	$h_{FE(2)}$	V_{CE}=-10V,I_C=-0.1mA	75			
	$h_{FE(3)}$	V_{CE}=-10V,I_C=-1mA	100			
	$h_{FE(4)}$	V_{CE}=-10V,I_C=-10mA	100			
	$h_{FE(5)}$	V_{CE}=-10V,I_C=-500mA	50			
Collector-emitter saturation voltage	$V_{CE(sat)*}$	I_C=-150mA,I_B=-15mA			-0.4	V
	$V_{CE(sat)*}$	I_C=-500mA,I_B=-50mA			-1.6	V
Base-emitter saturation voltage	$V_{BE(sat)*}$	I_C=-150mA,I_B=-15mA			-1.3	V
	$V_{BE(sat)*}$	I_C=-500mA,I_B=-50mA			-2.6	V
Transition frequency	f_T	V_{CE}=-20V,I_C=-50mA,f=100MHz	200			MHz
Delay time	t_d	V_{CE}=-30V,I_C=-150mA,$_{B1}$=-15mA			10	nS
Rise time	t_r				25	nS
Storage time	t_S	V_{CE}=-6V,I_C=-150mA, I_{B1}=- I_{B2}=- 15mA			225	nS
Fall time	t_f				60	nS

*Pulse test: t_p≤300μS, δ≤0.02.

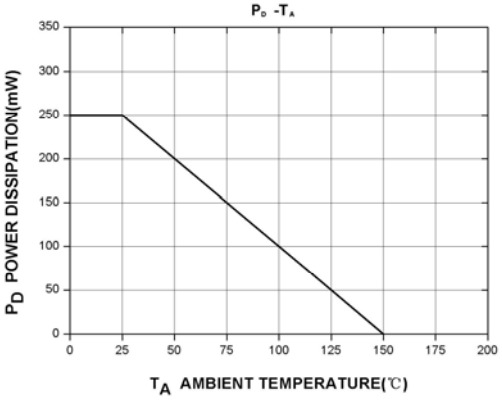
P_D -T_A
P_D POWER DISSIPATION(mW)
350
300
250
200
150
100
50
0
0
25
50
75
100
125
150
175
200
T_A AMBIENT TEMPERATURE(℃)

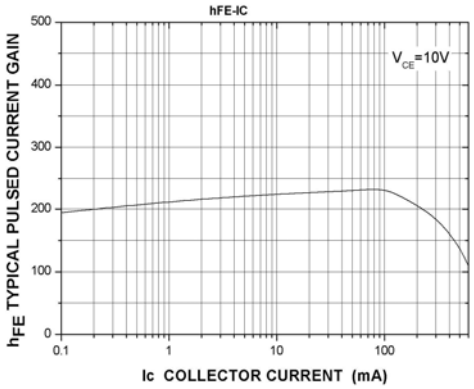
hFE-IC
V_{CE}=10V
h_{FE} TYPICAL PULSED CURRENT GAIN
500
400
300
200
100
0
0.1
1
10
100
Ic COLLECTOR CURRENT (mA)

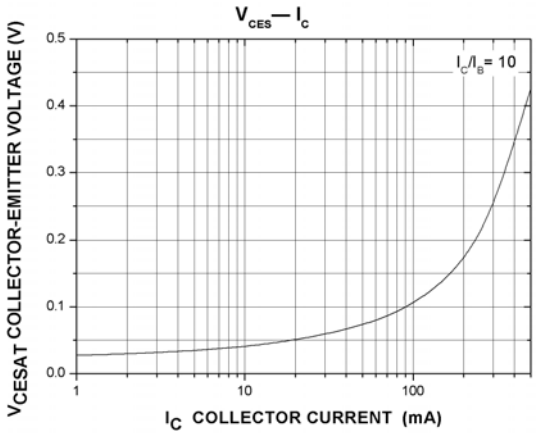
V_{CES}— I_C
I_C/I_B= 10
V_{CESAT} COLLECTOR-EMITTER VOLTAGE (V)
0.5
0.4
0.3
0.2
0.1
0.0
1
10
100
I_C COLLECTOR CURRENT (mA)