Title. TACT SWITCH

Product Model. KAN0441C-0252B1

Customer's Part NO.

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	PREPARE	
黄自兵	林庆杰	孙高高	

WENZHOU GANGYUAN ELECTRONICS CO., LTD.



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0441C-0252B1	TACT SWITCH	А

#### 1、 概述

#### **GENERAL**

1.2 适用范围

#### **APPLICATION**

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

#### Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20 °C ~ 70 °C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

#### Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- $-30^{\circ}$ C  $\sim$ 80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

#### **Test Conditions**

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature......20℃±2℃

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

 APPROVED BY
 黄自兵 17. 12. 06
 CHECKED BY
 林庆杰 17.12.06
 PREPARED BY
 孙高高 17.12.06



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0441C-0252B1	TACT SWITCH	А

#### 2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA

Ratings: 12V DC, 50mA

3. 电气性能:

#### **ELECTRICAL SPECIFICATION**

<b>∓</b> £	П	<u> </u>		나 저 사 교			4- H
项	目		1	试验条件			要求
ITI	EM		TEST CONDITIONS				UIREMENTS
		的	在以 5V 10mA的直流电源或不低于 1KHz 的交流电源的电路中,以一个等于 2 倍按力的静负荷施加于手柄中心				
	接触	東東阻	Applying a static	load of 2 times ope	rating force to		
1			e center of the stem	, measurements sha	all be made by		$\leq 100$ m $\Omega$
		5V	/ DC 10mA or mo	re than 1KHZ AC	small-current		
		со	ntact resistance met	er.			
2	Insu	ulation stance	在端子之间施加 D 间底座、盖板的电阻 Measurement sha 00V DC potential, rminals and cover, fo		≥100MΩ		
3	Diele	介质耐压在端子之间施加 250V AC(50HZ 或 60HZ) /1minDielectric250V AC (50HZ or 60HZ) shall be applied acrossvoltage proofterminals, for one minute.					无击穿、无飞弧 There should be breakdown and flashover
APPROVE	D BY 黄	責自兵 17. 12. 06	CHECKED BY	林庆杰 17.12.06	PREPARED	BY	孙高高 17.12.06



		NOTOAN		V/ \L	<u> </u>	.011 10	<i>,</i> , , , ,	
С	USTOMER	CUSTOMER'	S P/N GYE	S P/N	P	RODUCT		REVISION
			KAN04410	C-0252B1	TAC	CT SWITCH		А
	项目			: 件				要求
	ITEM		TEST COND	ITIONS			REC	QUIREMENTS
4	触点抖动 Bounce	在导通和断开设 Lightly striking	时的力度轻接手柄中, 过程中测试开关抖动 the center of the so to 4 times per so and "OFF" 开关 Switch		ON-3r	msec.max Bmsec.max		
1	械性能: IANICAL SPI	ECIFICATION						
1	按力 Operating Force	量开关导通所需 Placing the sw vertical and th center of the s	开关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.					1.6±0.5N
2		开关垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在 开关驱动件顶端中心,测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured.						0.3±0.1mm
APPF	ROVED BY	黄自兵 17.12.06	CHECKED BY	林庆杰 17	.12.06	PREPARI	ED BY	孙高高 17.12.06



GANGTUAN ALL TOVAL OF							110110
С	USTOMER	CUSTOMER'S	S P/N GYE	S P/N	PROD	UCT	REVISION
			KAN04410	C-0252B1	TACT S\	WITCH	А
	项目		试验条	: 件			要求
	ITEM		TEST COND	OITIONS			REQUIREMENTS
3	回弹力 Return Force	后,测量顶端向 The sample swi operation is ver	方向放置,在开关 自由位置转换的力 itch is installed su tical and upon dep vel distance, the fo all be measured.	witch enter	0.6MIN		
4	停止强度 Stop Streng	荷持续 1min。 Placing the swit vertical, and the	方向放置,从操作 tch such that the d en a static load on n operation for a pe	on is T	无机械和电气损坏 There shall be no sign of damage mechanically and electrically.		
5	手柄拔出 强度 Stem Strength	的行程范围。 Placing the swit vertical, and the	方向放置,反方向 tch such that the c en the maximum fo direction of stem op	on is	20N.min.		
6	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2±0.5s Immersion time: 2±0.5s					90° Ex coa	边缘外涂层应均匀覆盖 %以上 cept for the edge, the ating should cover a nimum 90%
APPF	ROVED BY	黄自兵 17. 12. 06	CHECKED BY	林庆杰 17.	12.06 PR	REPARED	BY 孙高高 17.12.06



С	SUSTOMER		CUSTOMER	'S P/N	GYE'	S P/N	Р	RODUCT		REVISION
					KAN04410	C-0252B1	TAC	CT SWITCH		А
	项目					条 件			要求	
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
	限电气性能: RONMENTAL	_SPEC	CIFICATION							
1	低温测试 Resistance low tempera	to ature	标准湿度的 Following to normal ten measureme (1) 温度 Tem (2) 时间	Temperature : -30±2℃					Contact ≤200ms 项目 3,4	
2	高温测试 Heat resista	ınce	标准湿度的 Following to normal ten measureme (1) 温度 ten (2) 时间	temperature:80±2℃ (2) 时间: 96h time: 96h						⊞: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3
3	温度周期性 Change temperat	根据下面的测试要求进行 5 次循环的温度周期性测试, 实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥.  After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed.  Temperature Time  tewicial 10						E测试。测 e shall be d humidity de. During	Contac ≤200m	
				ē	-10~65		1 2		Item 3,4.1,4.2,4.3	
				-	65±2℃ 65~-10		1			
					05° °-10		I .			
APP	ROVED BY	黄自	兵 17. 12. 06	СН	ECKED BY	林庆杰 1	7.12.06	PREPARE	ED BY	孙高高 17.12.06



			UAIT	AN ALLINOVAL OF LOTTIN				<i>71</i> \	<u> </u>	
С	USTOMER	(	CUSTOMER'S	P/N GYE'	S P/N	PF	PRODUCT		REVISION	
				KAN0441	C-0252B1	TAC	T SWITCH	I A		
	项目			试 验	条件			要求		
	ITEM			TEST CON	IDITIONS			RE	QUIREMENTS	
4	湿温测记 Moisture resistand	е	标准湿度的环 Following the normal temper measurement (1) 温度: temper (2) 相对语 relative (3) 时间:	temperature: 60±2℃ ) 相对湿度: 90%~95% relative humidity:90% to 95%					阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3	
5	硫化试验 Sulfuratio resistand	on	标准湿度的环 Following the normal tempor measurement (1) H2S <sup>2</sup> H <sub>2</sub> S ga (2) 时间: Time: 7 (3) 温度:	H₂S gas concentration: 3ppm±1ppm					阻: ≤200mΩ t resistance: Ω 4.1,4.2,4.3 4.1,4.2,4.3	
6	盐雾试验 Salt Mis		(1) 温度: 3 temper (2) 盐溶液 salt sol (3) 时间: 8 Time: 8l 实验后的盐沉	hall be checked after following test: 5℃±2℃ hture: 35℃±2℃ 注度: 5±1%(质量百分比) htion: 5±1%(solids by mass) h±1h hour					上没有腐蚀斑点 markable corrosion be recognized in part.	
APPF	ROVED BY	黄自	兵 17. 12. 06	CHECKED BY	林庆杰 17.	.12.06	PREPARI	ED BY	孙高高 17.12.06	



GANGTUAN ALLINOVAL OI LOII IOATIONO									
С	USTOMER		CUSTOMER'S P/N	GYE'	S P/N	Р	RODUCT	REVISION	
				KAN0441	C-0252B1	TAC	CT SWITCH		Α
1	限机械性能: NDURANCE	SPEC	IFICATION		,				
	项目				条件				要求
	ITEM			TEST CON	IDITIONS			RE	QUIREMENTS
1	工作寿命 Operation		Measurement shal (1) DC 12V, 5 DC 12V, 50 (2) 按动速率: Rate of operating F (4) 平均无故障	DC 12V, 50 mA resistive load ) 按动速率: 1 次/秒 Rate of operation: 1 times/s 3) 按力: 按力的 1.5 倍 Operating Force: Operating Force1.5double 4) 平均无故障寿命: Average fault-free life				电阻 ≤1ΩContact nce≤1Ω 初值的±30% ng Force: alue±30% 4.1,4.2,4.3 4.1,4.2,4.3	
2	振动 Vibra	tion	根据以下给定条件进行测试: Measurement shall be made following the test set forth below:  (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz  (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向: 包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular direction including the direction of stem travel  (4) 测试时间: 每次 2hours. Duration: Each 2hours.				z 互垂直的方 rpendicular		4.1,4.2,4.3 4.1,4.2,4.3
1	接条件: ERING CON	DITIOI	NS:				·		
请按以下条件进行焊接:  (1) 焊锡温度: ≤350℃  (2) 连续焊接时间: ≤3 s  Please practice according to below conditions:  (1) Soldering temperature: 350℃ Max.  (2) Continuous soldering time: 3 s Max.					<b>弘 亩 亩 47 40 00</b>				
APP	ROVED BY	更目:	兵 17. 12. 06 CHE	ECKED BY	林庆杰 17.	12.06	PREPARED	) R.L	孙高高 17.12.06



	U OAN	JIOAN		O1	110110			
С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION			
			KAN0441C-0252B1	TACT SWITCH	А			
项目 推 荐 条 件								
	ITEM		Recommended conditions					
7.2	回流焊时 Conditions for reflow	温度 (*C ) 180 - 150 -	120sec max.(预 3 to 4 m 炉内通过	热) 40s m	—— 时间			
38 昭 .			が円過程	H.) [n]				

#### 说明:

1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

- 1.2 在使用烙铁的情况下,焊锡温度应在 350℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。

Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2 设计中应注意的事项( Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。

Follow recommended P.W.B. piercing plan in outside drawing page.

- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关

Please be cautions not to give excessive static load or shock to swiches.

3.2 开关浸焊后,印刷基板注意不要叠放。


Please be careful not to pile up P.W.B.after switches were soldered


3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .


APPROVED BY 黄	黄自兵 17. 12. 06	CHECKED BY	林庆杰 17.12.06	PREPARED BY	孙高高 17.12.06





CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0441C-0252B1	TACT SWITCH	В

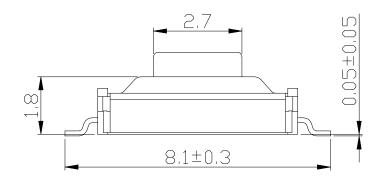



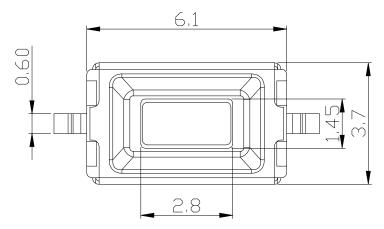

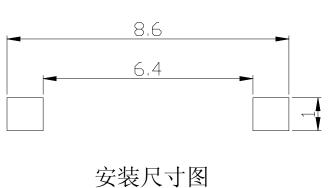



电路图

General tolerance: ±0.2mm

NO.	NAME	MATERIAL	QTY.	FINISHING	
1	TERMINAL	Brass	1	Silver plating	
2	CASE	LCP	1	White	
3	CONTACT	SUS	1	Ag plating	
4	STEM	PA6T	1	Red	
5	COVER	SUS	1		

APPROVED BY	黄自兵 17.12.06	CHECKED BY	林庆杰 17.12.06	PREPARED BY	孙高高 17.12.06