ISO14001: 2004 ISO9001: 2008

PRODUCT SPECIFICATION

轻触开关 产品名称: ITEM: TACT SWITCH

产品型号:

KAN0641-系列 TYPE:

HUBEI GARAWN:

徐晓丽 APPD:

发布日期:


2013. 9.20 DATE:



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0641	TACT SWITCH	А

A.Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

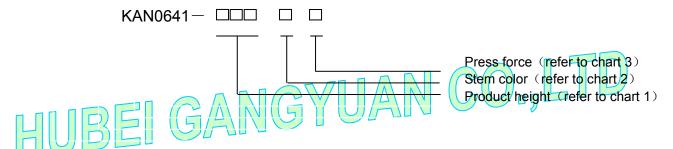

1. Product height: It is denoted by three figures; For examples, "075" expresses the product which the total height is 7.5mm, as chart 1 shows:

Code	Product height	Code	Product height
043	4.3	090	9
050	5	095	9.5
060	6		
07	7		
073	7.3		
080	8		

2. Stem color: It is expressed by a figure, as chart 2 shows:

Color	Black	Red	White	Blue	Yellow	Green	Gray	Grayish
Code	1	2	3	4	5	6	7	8

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

force Spec		Press force	Return force
Α	1.0	1.0±0.3	0.2min
В	1.6	1.6±0.5	0.4min
С	2.6	2.6±0.5	0.6min

Examples: "KAN0641N-0316B" denotes the tact switch with 6×6 base, Contact post is cover, the height is 3.1mm, the stem is Green, the operating force is 1.6N.

APPROVE BY	徐晓丽 2013.9.20	CHECKED BY	刘叶泉 2013.9.20	PRPARE BY	胡海燕 2013.9.18
------------	---------------	------------	---------------	-----------	---------------



N CO.,LTD

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0641	TACT SWITCH	Α

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

工作温度范围

Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下) -20℃~70℃ (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围 🖳 🗀 📗

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30°C~80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature......20°C±2°C

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa

APPROVE BY	徐晓丽 2013.9.20	CHECKED BY	刘叶泉 2013.9.20	PRPARE BY	胡海燕 2013.9.18



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0641	TACT SWITCH	А

详细说明 2

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

CO.,LTD 2.4 开关结构:单回路单输出(具体的触点结构在装配图中 Contact arrangement 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

ELECTRICAL SPECIFICATION

Į Į	页 目		试验条件				要求	
ľ	TEM		TE	ST CONDITIONS		RE	QUIREMENTS	
1		妾触电阻 Contact esistance	交流电源的电路中, 施加于手柄中心	tic load of 2 time of the stem, me 5V DC 10mA or	es operating easurements more than		≤ 100 m Ω	
2	lı	绝缘电阻 nsulation esistance	量端子之间底座、盖	shall be made 00V DC potent	e following ial, across		\geqslant 100M Ω	
3		个质耐压 Dielectric Itage proof	在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AV (50HZ or 60HZ) shall be applied across terminals, for one minute.			be	击穿、无飞弧 There should no breakdown and flashover	
APPROVE BY 徐晓丽 2013.9		20 CHECKED BY	刘叶泉 2013.9.20	PRPARE BY	Y	胡海燕 2013.9.18		



	GANGTUAN ALL TROVAL OF LOTH TO ALL OT LOTH TO ALL O					
CU	STOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
			KAN0641 TACT SWITCH			
	项目		试验条件		要求	
	ITEM	TE	EST CONDITIONS		REQUIREMENTS	
4	触点弹力 Bounce 日U	按照正常使用时的大 在导通和断开过程中 Lightly striking the encountered in nor	度轻接手柄中心 每 测试开关弹力 e center of the stemal use (3 to 4 time e tested at "ON" and " etch	s per second),	ON-3msec.max OFF-8msec.max	
4. 机板		CIEICATION				
MECHANICAL SPECIFICATION ### TX					refer to chart 3	
APPR	OVE BY	徐晓丽 2013.9.20 CHE	CKED BY 刘叶泉 201	3.9.20 PRPAR	E BY 胡海燕 2013.9.18	



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION	
			KAN0641	TACT SWITCH	4	Α	
	项目		试验条件			要求	
	ITEM	Т	EST CONDITIONS		REC	QUIREMENTS	
2	最大行程 Full Travel	施加在开关驱动件员 Placing the switch operation is vertica 2times operating for	T关垂直于操作方向放置,以一个等于 2 倍按力的静负荷 饱加在开关驱动件顶端中心,测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of times operating force to the center of the stem; the ravel distance for the switch to come to a stop shall be				
3	回弹力 Return Force	全行程后,测量顶端 The sample switch switch operation is stem in its center to	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be				
4	停止强度 Stop Strength	的静负荷持续 1min Placing the switch operation is vertica	n放置,从操作方向向导 such that the directly, and then a static locater contraction of stem operates	ction of switch ad of 30N shall	There	L械和电气损坏 shall be no sign of damage chanically and electrically.	
5	手柄拔出 强度 Stem Strength	量手柄的行程范围。 Placing the switch operation is vertica	开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem				
6 耐焊接热 Soldering heat resistance resistance Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h before measurement are made:			l械和电气损坏				
APP	ROVE BY 徐	È晓丽 2013.9.20 CHE	CKED BY 刘叶泉 201	3.9.20 PRPAR	RE BY	胡海燕 2013.9.18	



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	l I	PRODUCT	REVISION	
			KAN0641 TACT SWITCH				А
	项目		试验条件	<u> </u>			要求
	ITEM		TEST CONDIT	IONS		REG	QUIREMENTS
6	耐焊接热 Soldering he resistance		e and Immersion	n time:	1	of	shall be no sign damage inically and cally.
7	可焊性 Solderabilit	forth below: (1) 焊接温度:29 Solder tem (2) 浸入时间:29 Immersion 对于其它步	shall be made 55±5℃ perature : 255±5	 I t t	盖 90% Except the (於 於 於 於 於 於 於 於 於 於 於 於 於 於 於 於 於 於 於	
	k限电气性能: RONMENTAL SI	PECIFICATION			,		
【任温测试 Resistance low temperature to low temperature and humidity conditions for 1 h before measurements are made: (1) 温度: —30±2℃ Temperature :-30±2℃ (2) 时间: 96h Time: 96h					e shall be ditions for	Contac ≤200m 项目 3	
APP	ROVE BY 徐	晓丽 2013.9.20 CH	ECKED BY 刘叶	十泉 2013.9.20	PRPARE	BY	胡海燕 2013.9.18



						- V/ \L				
CL	JSTOMER	C	CUSTOMER'	'S P/N	GYE'	S P/N	Р	RODUCT		REVISION
			KAN0641 TACT SWITCH				ı	Α		
	项目				试 验	条件				要求
	ITEM				TEST CON	IDITIONS	3		RE	QUIREMENTS
	高温测试 Heat resistance		面的测试图 Following left in norm 1 h before (1)温度 tem (2)时间	temperature:80±2°C Item 3,4.1,4.2,4.3						
3	温度周期性》 Change o temperatu	of	样品应放在常温及标准湿度的环境中 1 小时后,根据下面的测试要求进行 5 次循环的温度周期性测试:测试期间样品应保持干燥 After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test waterdrops shall be removed. Temperature Time						act resistance: $m\Omega$ 3,4.1,4.2,4.3	
APPF	ROVE BY	徐晓丽	์ ชี 2013.9.20	CHE	ECKED BY	刘叶泉 2	013.9.20	PRPAR	E BY	胡海燕 2013.9.18



	CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION		
			KAN0641 TACT SWITCH A					
	项目 ITEM		试验条件 TEST CONDITIONS		要求 REQUIREMENTS			
4	湿温测试 Moisture resistance	面的测试要求进行 Following the test left in normal tent 1 h before measu (1) 温度: 60± temperatu (2) 相对湿度: relative hu	temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95% (3) 时间: 96h					
5	硫化试验 Sulfuration resistance	样品应放在常温及标准湿度的环境中 1 小时并重复 2~3 次后,根据下面的测试要求进行测试: Following the test set forth below the sample shall be left in normal temperature and humidity conditions for 1 h 1 and repeat two to three times before measurements are made: (1) H2S 气体浓度: 3ppm±1ppm H2S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h (3) 温度: 40±2℃(90~95%RH) temperature: 40±2℃(90~95%RH)						
6	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ No							
AP	PROVE BY 徐晓	ที่ 2013.9.20 CHE	CKED BY 刘叶泉 201	3.9.20 PRPAR	E BY	胡海燕 2013.9.18		



	GA	NGY	UAN	A		OVAL	SPE	CIFIC	HIN	7112 	
С	USTOMER	C	CUSTOMER'	S P/N	GYE'	S P/N	PI	RODUCT	REVISION		
					KAN	0641	TAC	T SWITCH	Н А		
6、极限机械性能: ENDURANCE SPECIFICATION											
项目					试 验	条 件			要求		
					ST CON	DITIONS			REQUIREMENTS		
1	工作寿i Operation		DC (2) 接续 Rat (3) 接 (4) Ope	nent shall v: 12V,50m 12V,50 r 功速率: 2 e of opera d: 按力的 erating Fo	be man 带负载 nA resist 3次/秒 ation: 2 to 1.5~2 orce:	de followin ive load o 3 times/s 倍 Operating erage fault 1000 8000	Force1	C O 5~2倍	resista 触点弹 Conta bounc 按力: Opera initial v 项目 3	触电阻 nΩContact ance≤200mΩ d力≤10ms act e≤10ms : 初值的±30% ting Force: value±30% 5,4.1,4.2,4.3 5,4.1,4.2,4.3	
2	振动 Vibra	ation	根据以下给定条件进行测试: Measurement shall be made following the test set forth below: (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm 项目						5,4.1,4.2,4.3 5,4.1,4.2,4.3		
7. 焊								l			
SOLDERING CONDITIONS:											
7.1	请按以下条件进行焊接: (1) 焊锡温度: ≤ <u>350</u> ℃ 丢工焊接 (2) 连续焊接时间, <3 s										
APP	ROVE BY	徐晓丽	可 2013.9.20	CHECK	ED BY	刘叶泉 201	3.9.20	PRPARI	E BY	胡海燕 2013.9.18	



	GANC	TUAN	ALLINOVAL	OI LOII IOA	110110
С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
	TEM ITEM	EI GAN		TACT SWITCH 字条件 ded conditions	
	ITEM 回流焊时				
7.2	Conditions for	ag (*C)	120sec max.(预热)	230°C	k. 3sec max. 时间
		-	3 to 4 min.		
			炉内通过时间		

说明:

1.1 开关浸焊后,注意不要用溶剂清洗。


After switches were soldered, please be careful not to clean switches with solvent.


- 1.2 在使用烙铁的情况下,焊锡温度应在 380℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。
 Right after switches were soidered; please be careful not to load to on the knobs of switches.
- 2 设计中应注意的事项(Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
 Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。
 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .

APPROVE BY 徐晓丽 2013.9.20 CHECKED BY 刘叶泉 2013.9.20 PRPARE BY 胡海燕 2013.9.18



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0641	TACT SWITCH	А

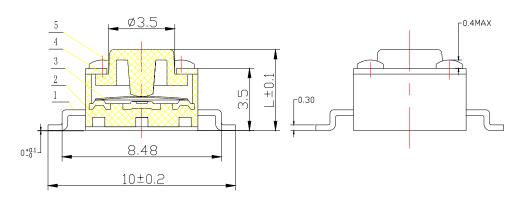

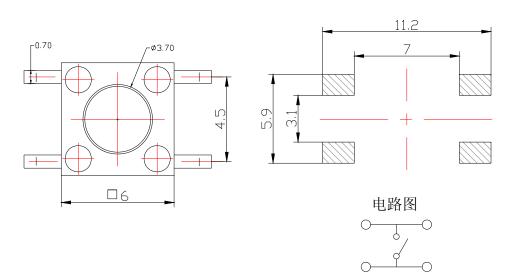

General tolerance: ±0.1mm

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	TERMINAL	Brass	China		Silver plating
2	CASE	PPA \	China	1	brown/Black
3	CONTACT	F.Ag/Cu	Japan	1	Contact side silver plating
4	COVER	SPCC	China	1	CuSn plating
5	STEM	PPA	Japan	1	Customer Demand

APPROVE BY 徐晓丽	N 2013.9.20 CHECKED BY	刘叶泉 2013.9.20	PRPARE BY	胡海燕 2013.9.18
----------------	------------------------	---------------	-----------	---------------