



#### **ULTRA LOW CAPACITANCE TVS ARRAY**


VOLTAGE 3.3~24 Volt POWER 350 Watt

#### **FEATURES**

- IEC 61000-4-2 ESD ±30kV air, ±30kV Contact
- IEC61000-4-4(EFT): 40A(5/50nS)
- Unidirectional & Bidirectional Configurations
- Replacement for MLV (0805)
- Protects One Power or I/O Port
- Low Clamping Voltage
- Ultra Low Capacitance : 3pF Maximum
- Lead free in compliance with EU RoHS 2011/65/EU directive
- Green molding compound as per IEC61249 Std. . (Halogen Free)

#### **MECHANICAL DATA**

- Case: SOD-323, Molded plastic over passivated junction
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 0.0001 ounces, 0.0041 grams

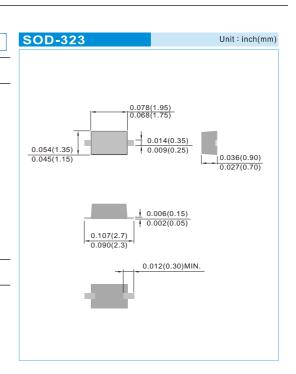

### MAXIMUM RATINGS (@25°C unless otherwise specified)

| PARAMETER                                  | SYMBOL               | VALUE       | UNITS |
|--|----------------------|-------------|-------|
| Peak Pulse Power (t P=8/20μs)-See Figure 1 | P <sub>PP</sub>      | 350         | W     |
| Operating and Storage Temperature Range    | Т <sub>J</sub> ,Тsтg | -55 to +150 | °C    |







### ELECTRICAL CHARACTERISTICS PER LINE (@25°C unless otherwise specified)

| Part Number<br>(See Notes1-2) | Peak Power<br>Dissipation<br>@8/20µs<br>PPPM | Rated-Stand-<br>Off Voltage | Reverse Breakdown Voltage  Maximum Clampi Voltage (See Fig. @8/20μs Pppi |       |    | See Fig.2) | Leakage<br>Current | Off-State<br>Capacitance,<br>1MHz Zero dc<br>Bias<br>0 V @ 1 MHz | Marking<br>Code |    |
|-------------------------------|--|-----------------------------|--|-------|----|------------|--------------------|--|-----------------|----|
|                               |  | Vrwm                        |  |       |    |            | I R @ VRWM         | Co   |                 |    |
|                               |  | Max.                        | Min.   | Max.  | lт | Vc@I pp    |                    | Max.   | Max.            |    |
|                               | W  | V                           | V  | V     | mA | V A        |                    | μΑ   | pF              |    |
| PJGBLC03                      | 350  | 3.3                         | 4.75   | 5.25  | 1  | 7.5        | 1                  | 20   | 3               | AA |
| PJGBLC03C                     | 350  | 3.3                         | 4.75   | 5.25  | 1  | 7.5        | 1                  | 20   | 3               | AQ |
| PJGBLC05                      | 350  | 5.0                         | 7.03   | 7.77  | 1  | 9.8        | 1                  | 5  | 3               | AB |
| PJGBLC05C                     | 350  | 5.0                         | 7.03   | 7.77  | 1  | 9.8        | 1                  | 5  | 3               | AL |
| PJGBLC08                      | 350  | 8.0                         | 8.93   | 9.87  | 1  | 13.4       | 1                  | 1  | 3               | AC |
| PJGBLC08C                     | 350  | 8.0                         | 8.93   | 9.87  | 1  | 13.4       | 1                  | 1  | 3               | AR |
| PJGBLC12                      | 350  | 12                          | 13.97  | 15.44 | 1  | 19         | 1                  | 1  | 3               | AJ |
| PJGBLC12C                     | 350  | 12                          | 13.97  | 15.44 | 1  | 19         | 1                  | 1  | 3               | AM |
| PJGBLC15                      | 350  | 15                          | 17.39  | 19.22 | 1  | 24         | 1                  | 1  | 3               | AS |
| PJGBLC15C                     | 350  | 15                          | 17.39  | 19.22 | 1  | 24         | 1                  | 1  | 3               | AN |
| PJGBLC24                      | 350  | 24                          | 27.27  | 30.14 | 1  | 43         | 1                  | 1  | 3               | AT |
| PJGBLC24C                     | 350  | 24                          | 27.27  | 30.14 | 1  | 43         | 1                  | 1  | 3               | AP |

#### NOTES:


- 1.Part numbers with an additional "C" suffix are bidirectional devices,i.e.,PJGBLC03C
- 2.Unidirectional Only : Positive potential is applied from pin  $2\ to\ 1$











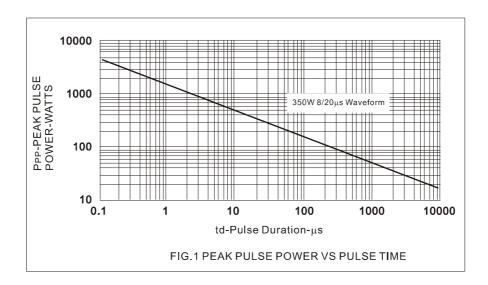

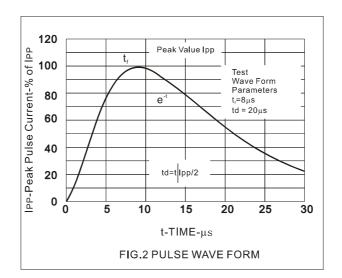


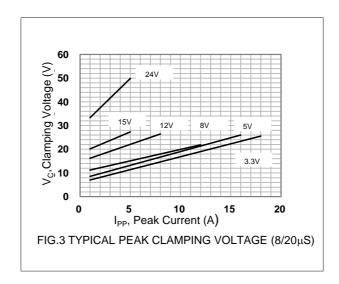





### **MOUNTING PAD LAYOUT**

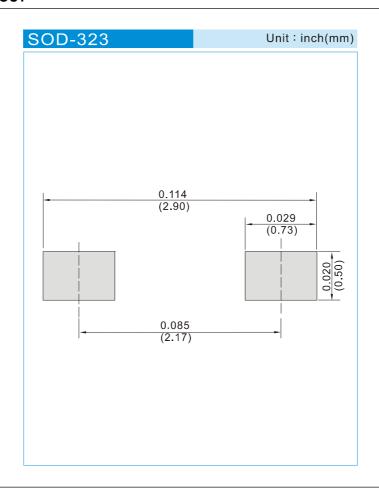

### **ORDER INFORMATION**

• Packing information

T/R - 12K per 13" plastic Reel

T/R - 5K per 7" plastic Reel





## Part No\_packing code\_Version

PJGBLC03\_R1\_00001 PJGBLC03\_R2\_00001

## For example:



|                                      | Versi                | Version Code XXXXX                |                      |            |          |                                       |
|--------------------------------------|----------------------|-----------------------------------|----------------------|------------|----------|---------------------------------------|
| Packing type                         | 1 <sup>st</sup> Code | Packing size code                 | 2 <sup>nd</sup> Code | HF or RoHS | 1st Code | 2 <sup>nd</sup> ~5 <sup>th</sup> Code |
| Tape and Ammunition Box (T/B)        | Α                    | N/A                               | 0                    | HF         | 0        | serial number                         |
| Tape and Reel<br>(T/R)               | R                    | 7"                                | 1                    | RoHS       | 1        | serial number                         |
| Bulk Packing<br>(B/P)                | В                    | 13"                               | 2                    |            |          |                                       |
| Tube Packing<br>(T/P)                | Т                    | 26mm                              | Х                    |            |          |                                       |
| Tape and Reel (Right Oriented) (TRR) | S                    | 52mm                              | Y                    |            |          |                                       |
| Tape and Reel (Left Oriented) (TRL)  | L                    | PANASERT T/B CATHODE UP<br>(PBCU) | U                    |            |          |                                       |
| FORMING                              | F                    | PANASERT T/B CATHODE DOWN (PBCD)  | D                    |            |          |                                       |





## **Disclaimer**

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties
  of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation.
   Customers are responsible in comprehending the suitable use in particular applications.
   Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.