

LINEAR INTEGRATED CIRCUIT

CONSTANT VOLTAGE AND CONSTANT CURRENT CONTROLLER

DESCRIPTION

The UTC **UM606**, for a constant voltage/constant current mode SMPS (switch mode power supplies) application which is a highly integrated solution, it contains one 1.21V voltage reference with $\pm 1\%$ accuracy, one current sensing circuit and two operational amplifiers. The UTC **UM606** is an ideal voltage controller for use in adapters and battery chargers because the voltage reference it's combining with one operational amplifier. And the UTC **UM606** is an ideal current limiter for output low side current sensing because the other low voltage reference is combining with the other operational amplifier.

6 5 4 2 3 SOT-26

FEATURES

*Constant Voltage and Constant Current Control *Precision Internal Voltage Reference *Few External Components *Easy Compensation

ORDERING INFORMATION


Ordering Number		Dookago	Dooking	
Lead Free	Halogen Free	Package	Packing	
UM606xL-AG6-R	UM606xG-AG6-R	SOT-26	Tape Reel	

UM606 <u>xL-AG6-R</u>		(1) R: Tape Reel
	(1) Packing Type	(2) AG6: SOT-26
	(2) Package Type	(2) L. Load Free, C. Helegen Free
	(3) Lead Free	(3) L: Lead Free, G: Halogen Free
	(4) Reference Voltage	(4) refer to Marking Information

MARKING

PACKAGE	CODE	MARKING
SOT-26 (For UM606)	-	$\begin{array}{cccc} 6 & 5 & 4 \\ \hline & & & \\ & & &$
SOT-26 (For UM606x)	D	$\begin{array}{cccccccccccccccccccccccccccccccccccc$

PIN CONFIGURATION




PIN DESCRIPTION

PIN NO.	PIN NAME	FUNCTION
1	V _{CTRL}	Input pin of the voltage control loop
2	GND	Ground
3	V _{OUT}	Output pin. sinking current only
4	I _{CTRL}	Input pin of the current control loop
5	V _{SENSE}	Input pin of the current control loop
6	V _{CC}	Power supply



BLOCK DIAGRAM

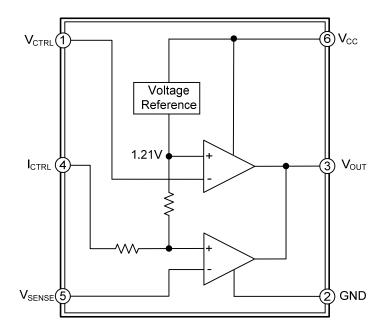



■ ABSOLUTE MAXIMUM RATINGS (T_A=25°C, unless otherwise specified.)

PARAMETER	SYMBOL	RATINGS	UNIT
DC Supply Voltage	V _{CC}	20	V
Input Voltage	V _{IN}	-0.3 ~ V _{CC}	V
Junction Temperature	TJ	+150	°C
Operating Temperature	T _{OPR}	-40~+105	°C
Storage Temperature	T _{STG}	-65 ~ +150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ _{JA}	250	°C/W
Junction to Case	θ _{JC}	92	°C/W

RECOMMENDED OPERATING CONDITIONS


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V _{cc}	2.5 ~ 18	V

ELECTRICAL CHARACTERISTICS (V_{CC}=5V, T_A=25°C, unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Reference Voltage	N		UM606	1.198	1.21	1.222	v
Reference voltage	V_{REF}		UM606D	1.186	1.21	1.234	v
Current Centrel Lean Deference	M		UM606	196	200	204	mV
Current Control Loop Reference	V _{SENSE}	I _{OUT} =2.5mA	UM606D	66.5	70	73.5	
	M	Voi 1@10mA Sinking Current	UM606		200		mV
Low Output Voltage	VOL		UM606D		100		
Total Cumply Current			UM606		0.6	1.2	mA
Total Supply Current	I _{CC}	V _{CC} =5V	UM606D		0.5	1.0	
Input Bias Current	I _{IB}				50		nA
		@-200mV	UM606		25		
Current Out of Pin I _{CTRL}	I _{IBI}		UM606D		18		μA
Output Short Circuit Current.	los	Output to V _{CC} . Sink Current Only			27	50	mA
Transconduction Gain (V _{CTRL})	Gmv	Sink Current Only		1	3.5		mA/mV
Transconduction Gain (I _{CTRL}).	Gmi			1.5	7		mA/mV



TYPICAL APPLICATION CIRCUIT

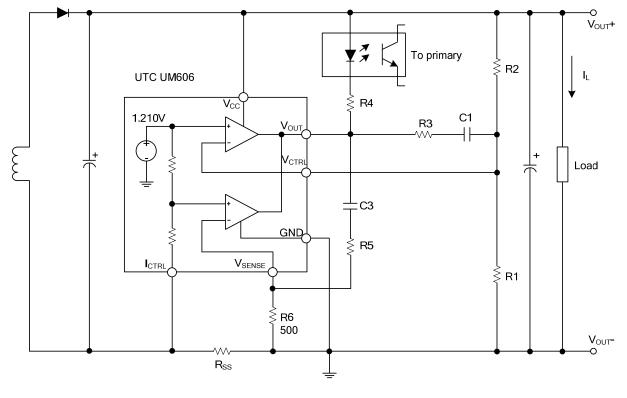


$$V_{OUT} = V_{REF} \times \frac{R1 + R2}{R1}$$
 (V)

 $Current \ Limit = \frac{V_{SENSE}}{R_{SS}} \quad (A)$

Figure 1. Typical Application 1 of UTC UM606



TYPICAL APPLICATION CIRCUIT(Cont.)

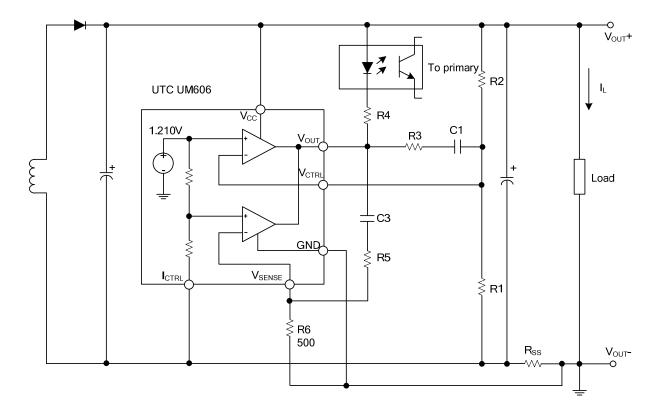


$$V_{OUT} = \left[V_{REF} + \left(I_L \times R_{SS}\right)\right] \times \frac{R1 + R2}{R1} - \left(I_L \times R_{SS}\right) \quad (V)$$

Current Limit = $\frac{V_{\text{SENSE}}}{R_{SS}}$ (A)

Figure 2. Typical Application 2 of UTC UM606



TYPICAL APPLICATION CIRCUIT(Cont.)

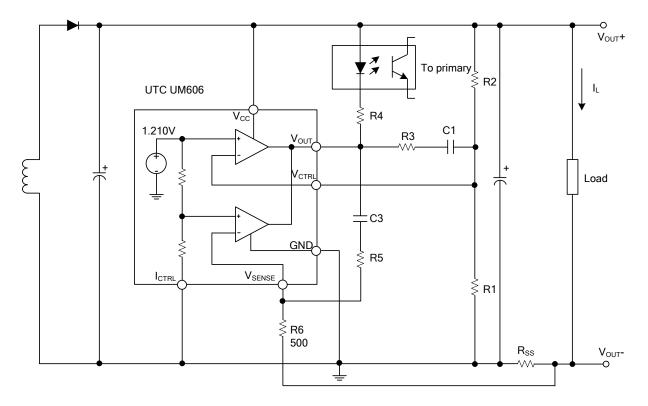

$$V_{OUT} = V_{REF} \times \frac{R1 + R2}{R1} - (I_L \times R_{SS}) \quad (V)$$


 $Current \ Limit = \frac{V_{\text{SENSE}} \times V_{\text{REF}}}{\left(V_{\text{SENSE}} + V_{\text{REF}}\right) \times R_{\text{SS}}} \quad (A)$

Figure 3. Typical Application 3 of UTC UM606




LINEAR INTEGRATED CIRCUIT



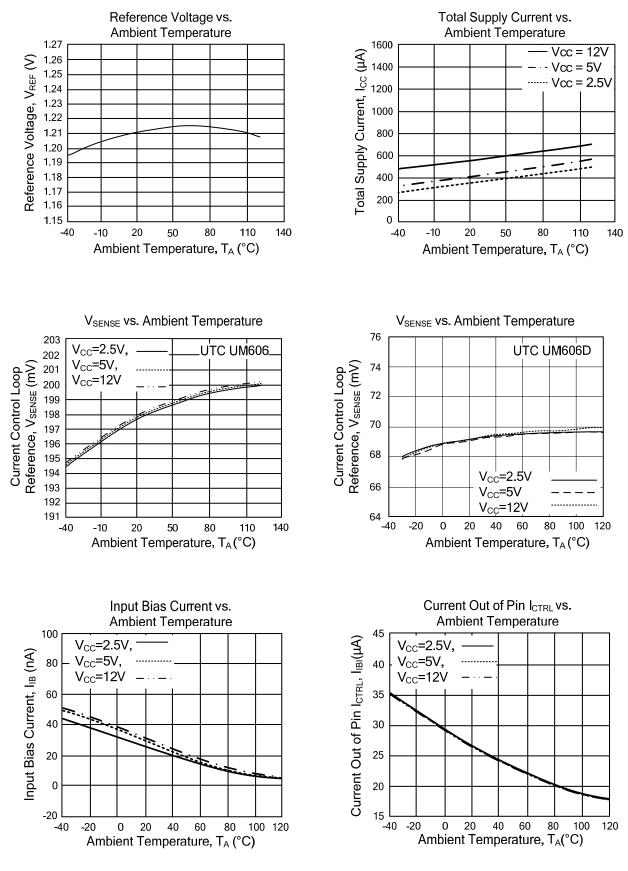





TYPICAL PERFORMANCE CHARACTERISTICS(Cont.)

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.

