




Surface Mount Schottky Rectifier



Features

- 1.0A $\bullet I_0$
- ●V_{RRM} 20V-100V
- High surge current capabilityCases: Molded plastic



■Limiting Values (Absolute Maximum Rating)

Limiting values (Absolute Maximum Rating)										
Item	Symbol	Unit	Test Conditions	SS12	SS13	SS14	SS15	SS16	SS19	SS110
Repetitive Peak Reverse Voltage	V _{RRM}	V		20	30	40	50	60	90	100
Average Forward Current	I _{F(AV)}	А	60HZ Half-sine wave, Resistance load, Ta(Fig.1)				1.0			
Surge(Non- repetitive)Forward Current	I _{FSM}	А	60Hz Half-sine wave ,1 cycle , Ta =25°C	30						
Junction Temperature	TJ	$^{\circ}$		-55~+125 -55~+150		+150				
Storage Temperature	T _{STG}	$^{\circ}$		-55 ~ + 150						

Notes 1. Thermal resistance from junction to ambient mounted on P.C.B. with 5.0 mm x 5.0 mm copper heatsink

■Electrical Characteristics (Ta=25

EstJotherwise specified)

Item	Symbol	Unit	Test Conditions		SS12	SS13	SS14	SS15	SS16	SS19	SS110
Peak Forward Voltage	V _F	٧	I _F =1.0A		0.55		0.70		0.85		
Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25℃	0.5			0	.1		
	I _{RRM2}		TOW TOWN	T _a =100℃		10		5.0		2.0	
Thermal	R _{θJ-A}	°CAM	Between junction and ambient		88 ¹⁾						
Resistance(Typical)	R _{θJ-L}	°C/W	Between junction and terminal		28 ¹⁾						


Notes:


Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2" x 0.2" (5.0 mm x 5.0 mm) copper pad areas

■Ordering Information (Example)


PREFERED P/N	PACKING CODE	UNIT WEIGHT(g)	MINIMUM PACKAGE(pcs)	INNER BOX QUANTITY(pcs)	OUTER CARTON QUANTITY(pcs)	DELIVERY MODE
SS12 THRU SS110	F1	Approximate 0.063	5000	10000	80000	13" reel

■ Characteristics(Typical)

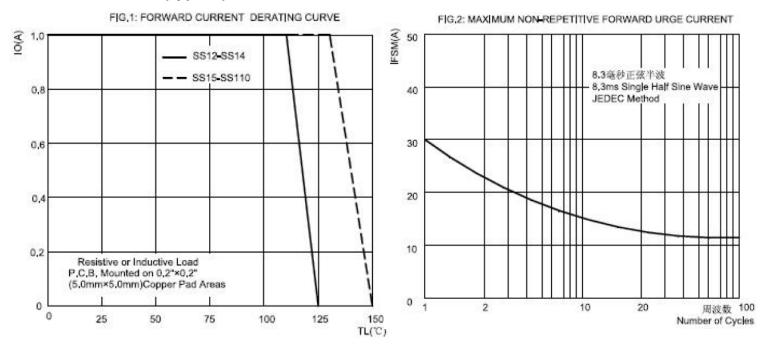

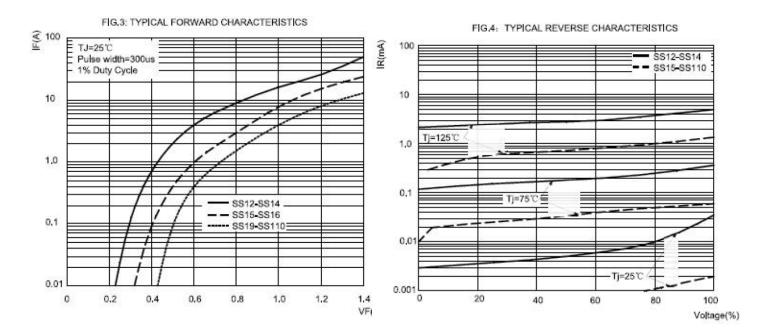

■ Outline Dimensions

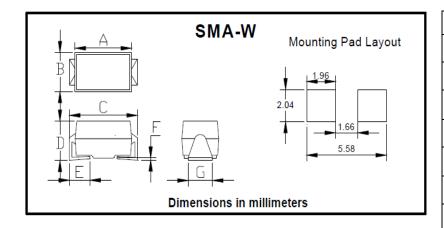

SMA-W						
Dim	Min	Max				
Α	4.00	4.60				
В	2.40	2.65				
С	4.80	5.31				
D	2.05	2.45				
Е	0.80	1.50				
F	0.10	0.20				
G	1.15	1.80				



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or +otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http:// www.21yangjie.com, or consult your nearest Yangjie's sales office for further assistance.