


# Datasheet of SAW Device

SAW Single Filter for GPS / Unbalanced / 4pin /0907

Murata PN: SAFFW1G17AA0E0A

### Feature

- Smallest GPS(L5) DRx
- Next Gen. Industry Standard Size
- Very Low Insertion Loss



Note: Murata SAW Component is applicable for Cellular /Cordless phone (Terminal) relevant market only.

Please also read caution at the end of this document.



#### General Information

- Operating temperature : -20 to +85 deg.C - Storage temperature : -40 to +85 deg.C

- Input Power :+15 dBm 5000 h +50 deg.C

D.C. Volatage between the terminals : 3V (25+/-2 deg.C)
 Minimum Resistance between the terminals : 10M ohm

RoHS compliance : YesESD (ElectroStatic Discharge) sensitive device




### Package Dimensions & Recommended Land Pattern


unit: mm

#### **Dimensions**

TOP VIEW



FRONT VIEW



Marking: Laser Printing

\*: Month code(Refer to the table A)
\$: Date code(Refer to the table B)

1:2 2:Q


Terminal Number

(2): Unbalanced port(4): Unbalanced port


Others: GND

Notice) Please refer to Measurement Circuit for Port information in detail.

#### Land Pattern



### Measurement Circuit (Top Thru View)

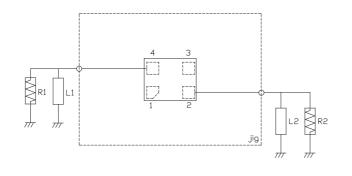

R1 : 50 ohm	L1 :30nH(Ideal inductor)
R2:50 ohm	L2 :30nH(Ideal inductor)



## Electrical Characteristic < Item >


Characteristics											
	ltem				(-20	to +85 d	eg.C)	Unit	Note		
					min.	typ.*	max.				
Center Frequency						1176.5		MHz			
Insertion Loss	1166.22	to	1186.68	MHz		0.9	1.5	dB			
	1166.22	to	1186.68	MHz		0.9	1.3	dB	+23 to +27deg.C		
Ripple Deviation	1166.22	to	1186.68	MHz		0.2	1.0	dB			
GDT Ripple Deviation	1166.22	to	1186.68	MHz		9	22	ns			
VSWR	1166.22	to	1186.68	MHz		1.2	2.0				
Absolute Attenuation		to	698.	MHz	35	39		dB			
	698.	to	960.	MHz	35	39		dB			
	698.	to	748.	MHz	35	39		dB			
	777.	to	798.	MHz	35	40		dB			
	807.	to	915.	MHz	35	39		dB			
	925.	to	960.	MHz	35	39		dB			
	1330.	to	1427.	MHz	28	34		dB			
	1427.	to	1511.	MHz	33	39		dB			
	1640.	to	1695.	MHz	30	41		dB			
		to	1710.	MHz	40	49		dB			
	1710.	to	2200.	MHz	40	45		dB			
		to	2400.	MHz	39	45		dB			
	2400.	to	2483.	MHz	38	44		dB			
		to	2690.	MHz	35	42		dB			
	3300.	to	3800.	MHz	28	34		dB	N78		
	3300.	to	4200.	MHz	28	34		dB	N77		
	4400.	to	5000.	MHz	26	32		dB	N79		
	5150.	to	5950.	MHz	24	31		dB	5G ISM		
	<del></del>					-					
	-										
	-										
<u> </u>	+								!		


<sup>\*</sup> Typical value at 25±2deg.C



### **Electrical Characteristic**

< Item >

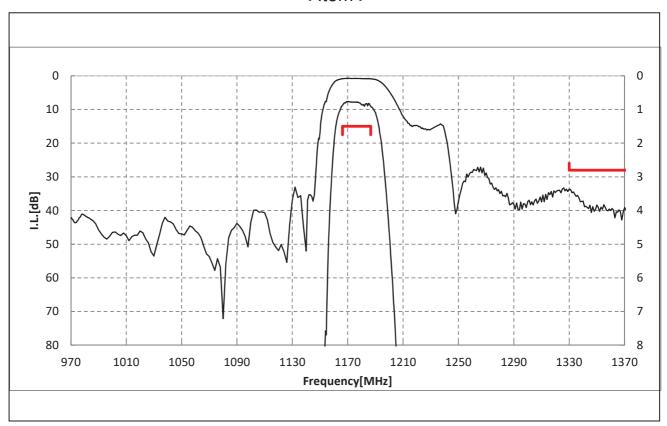


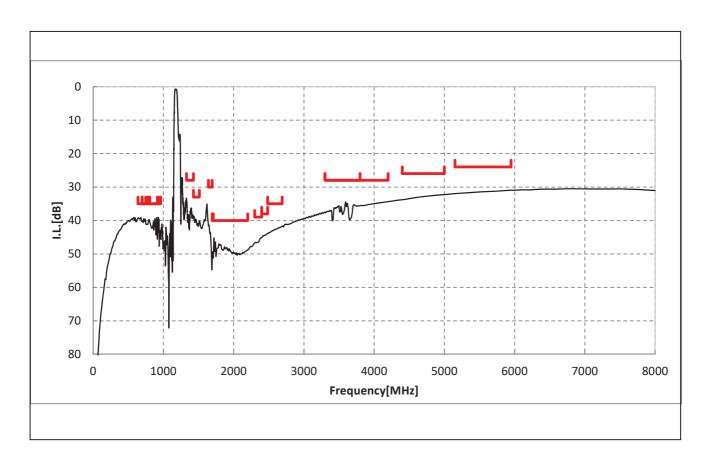




## Dimensions of Tape & Reel unit: mm


#### Carrier Tape

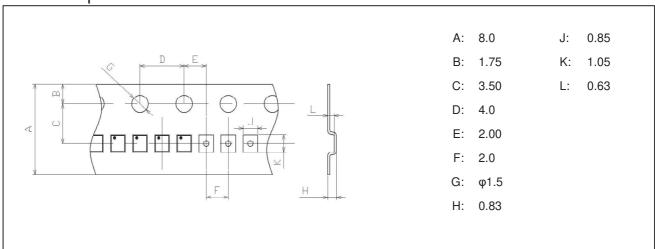

#### Tape

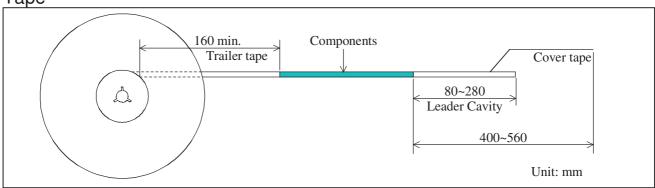

#### Reel

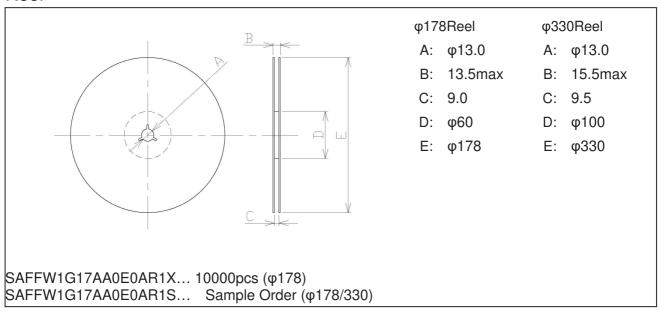



### Marking Code

Т	้ล	h	le	Α	•	M	lo	n.	th	ı (	ີ.ຕ	h	6
	u	$\sim$		/ \		1 V I	ı		LI		ノし	, ,	$\sim$

2017	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2021 2025	А	В	С	D	E	F	G	Н	J	K	L	M
2018	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2022 2026	N	Р	Q	R	S	Т	U	V	W	Х	Y	Z
2019	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2023 2027	а	b	ī	d	е	f	g	h	j	k	Q	m
2020	Jan.	Feb.	Mar.	Apr.	May.	Jun.	Jul.	Aug.	Sep.	Oct.	Nov.	Dec.
2024 2028	n	p	8	r	4	t	٥	U	w	æ	y	8

#### Table B: Date Code

date	11th L	12th M	13th N	14th P	15th Q	16th R	17th S	18th T	19th U	20th V	
date	21st	22nd	23rd	24th	25th	26th	27th	28th	29th	30th	31st
code	W	Х	Υ	Z	а	b	c	d	е	f	g

### Important Notice (1/2)

#### PLEASE READ THIS NOTICE BEFORE USING OUR PRODUCTS.

Please make sure that your product has been evaluated and confirmed from the aspect of the fitness for the specifications of our product when our product is mounted to your product. All the items and parameters in this product specification/datasheet/catalog have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment specified in this specification. You are requested not to use our product deviating from the condition and the environment specified in this specification.

Please note that the only warranty that we provide regarding the products is its conformance to the specifications provided herein. Accordingly, we shall not be responsible for any defects in products or equipment incorporating such products, which are caused under the conditions other than those specified in this specification.

WE HEREBY DISCLAIMS ALL OTHER WARRANTIES REGARDING THE PRODUCTS, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION ANY WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, THAT THEY ARE DEFECT-FREE, OR AGAINST INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS.

The product shall not be used in any application listed below which requires especially high reliability for the prevention of such defect as may directly cause damage to the third party's life, body or property. You acknowledge and agree that, if you use our products in such applications, we will not be responsible for any failure to meet such requirements.

Furthermore, YOU AGREE TO INDEMNIFY AND DEFEND US AND OUR AFFILIATES AGAINST ALL CLAIMS, DAMAGES, COSTS, AND EXPENSES THAT MAY BE INCURRED, INCLUDING WITHOUT LIMITATION, ATTORNEY FEES AND COSTS, DUE TO THE USE OF OUR PRODUCTS IN SUCH APPLICATIONS.



#### Important Notice (2/2)

- Aircraft equipment.
- Aerospace equipment
- Undersea equipment.
- Power plant control equipment Medical equipment.
- Transportation equipment (vehicles, trains, ships, elevator, etc.).
- Traffic signal equipment.
- Disaster prevention / crime prevention equipment.
- Burning / explosion control equipment
- Application of similar complexity and/ or reliability requirements to the applications listed in the above.

We expressly prohibit you from analyzing, breaking, Reverse-Engineering, remodeling altering, and reproducing our product. Our product cannot be used for the product which is prohibited from being manufactured, used, and sold by the regulations and laws in the world.

Please do not use the product in molding condition.

This product is ESD (ElectroStatic Discharge) sensitive device.

When you install or measure this, you should be careful not to add antistatic electricity or high voltage. Please be advised that you had better check anti serge voltage.

We do not warrant or represent that any license, either express or implied, is granted under any our patent right, copyright, mask work right, or our other intellectual property right relating to any combination, machine, or process in which our products or services are used. Information provided by us regarding third-party products or services does not constitute a license from us to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from us under our patents or other intellectual property.

Please do not use our products, our technical information and other data provided by us for the purpose of developing of mass-destruction weapons and the purpose of military use.

Moreover, you must comply with "foreign exchange and foreign trade law", the "U.S. export administration regulations", etc.

Please note that we may discontinue the manufacture of our products, due to reasons such as end of supply of materials and/or components from our suppliers.

Customer acknowledges that Murata will, if requested by you, conduct a failure analysis for defect or alleged defect of Products only at the level required for consumer grade Products, and thus such analysis may not always be available or be in accordance with your request (for example, in cases where the defect was caused by components in Products supplied to Murata from a third party).

The product shall not be used in any other application/model than that of claimed to Murata.

Customer acknowledges that engineering samples may deviate from specifications and may contain defects due to their development status.

We reject any liability or product warranty for engineering samples.

In particular we disclaim liability for damages caused by

- •the use of the engineering sample other than for evaluation purposes, particularly the installation or integration in the product to be sold by you,
  - deviation or lapse in function of engineering sample,
  - ·improper use of engineering samples.

We disclaim any liability for consequential and incidental damages.

If you can't agree the above contents, you should inquire our sales.