ROHS

INGRESS PROTECTION:IP67

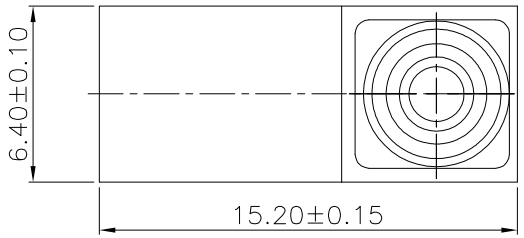

NOTE:

1.Rating1:DC12V 3A
  Rating2:48V DC/125V AC/250V AC 0.1A
2.Operating froce:130gf MAX
3.Electric Life:10,000
4.Mechanical Life:1,000,000

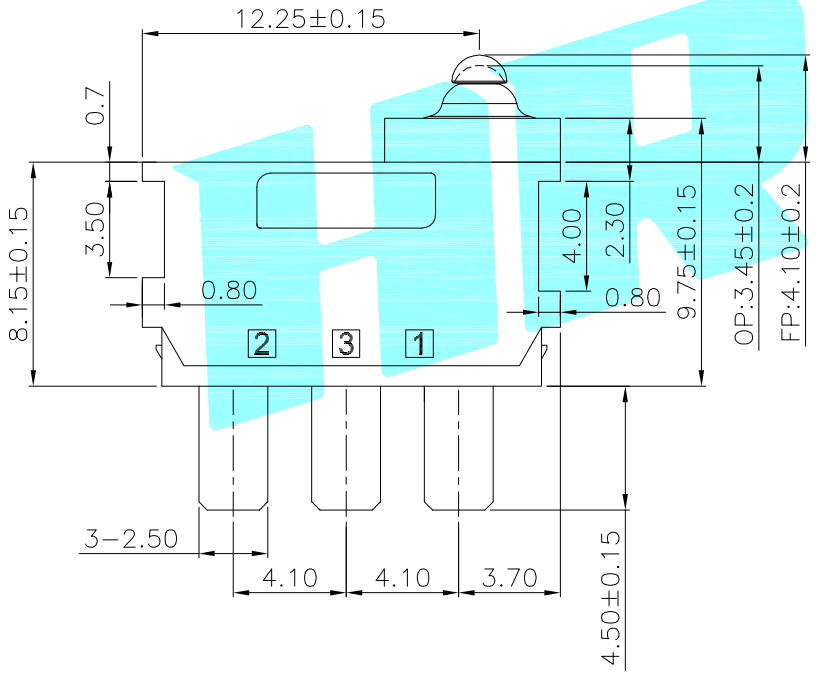

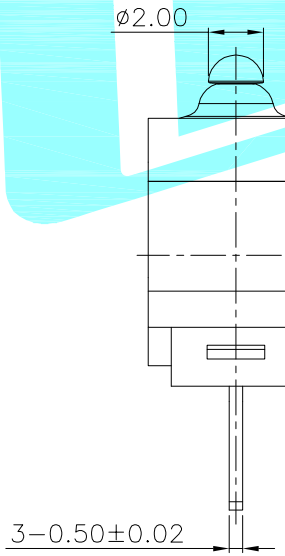



Circuit Diagram

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑦	Shrapnel	——	1	Brass	Plating silver	——
⑥	Contact	——	1	Ag	——	——
⑤	Sealed Circle	——	1	Silicone Rubber	——	——
④	Terminal	——	3	Brass(0.50t)	Plating silver	——
③	Plunger	——	1	POM	Black	——
②	Case	——	1	PA	Black	——
①	Cover	——	1	PA	Black	——

APPROVALS		DATE	HRO 韩荣® ELECTRONICS CO.,LTD
DRAWN	J.X.Zhang	2018/8/1	
CHECKED			TITLE: MICRO SWITCHS
APPROVALS			PART NO. K9-1802F

TOLERANCES ARE			ANGLE	UNIT: mm	SCALE: 1:1	PROJ:
	30~以上	±0.30				
	10~30	±0.20				
	5~10	±0.15	±2°	DRAWING NO.	——	SHEET 1 OF 1
	~ 5	±0.10				

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
——	A	——	NEW	——	——	——