

# KMS Series Upgrade!

- The lower temperature range of the category temperature range has been expanded.
- For solar power generation
- Endurance with ripple current : 105°C 3,000 hours
- Rated voltage range : 160 to 600V
- Capacitance range : 47 to 3,300μF
- Non solvent resistant type
- RoHS2 Compliant



**600V  
Lineup!**




## ◆ SPECIFICATIONS


Items	Characteristics		
Category Temperature Range	-40 to +105°C(160 to 500V <sub>dc</sub> )    -25 to +105°C(550 to 600V <sub>dc</sub> )		
Rated Voltage Range	160 to 600V <sub>dc</sub>		
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)		
Leakage Current	I ≤ 3√CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)		
Dissipation Factor (tan δ)	Rated voltage (V <sub>dc</sub> )	160 to 400V	420 to 600V
	tan δ (Max.)	0.15	0.20
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	160 to 400V	420 to 600V
	Z(-25°C)/Z(+20°C)	4	8
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied (the peak voltage shall not exceed the rated voltage) for 3,000 hours at 105°C.		
	Capacitance change	≤ ±20% of the initial value	
	D.F. (tan δ)	≤ 200% of the initial specified value (600V <sub>dc</sub> : ≤ 300%)	
	Leakage current	≤ The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.		
	Capacitance change	≤ ±15% of the initial value	
	D.F. (tan δ)	≤ 150% of the initial specified value	
	Leakage current	≤ The initial specified value	

## ◆ DIMENSIONS [mm]

● Terminal Code : VS (φ22 to φ35) : Standard

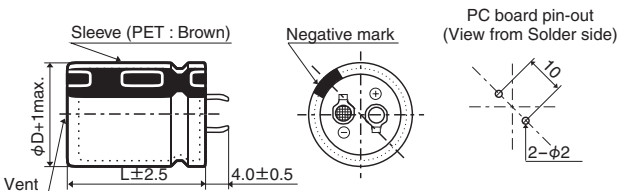


● Terminal Code : LI (φ35)

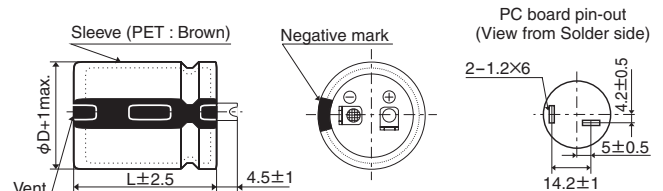

The standard design has no plastic disc.

## ◆ PART NUMBERING SYSTEM

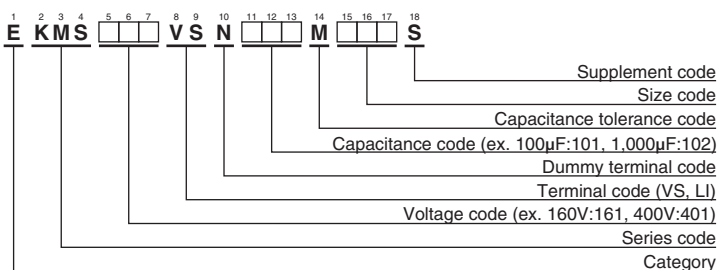

Please refer to "Product code guide (snap-in type)"





## KMS Series

### ◆STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (µF)	Case size ϕD×L(mm)	tan δ	Rated ripple current (Arms/105°C, 120Hz)	Part No.
400	390	25.4 × 50	0.15	1.66	EKMS401VSN391MQ50S
	390	30 × 35	0.15	1.61	EKMS401VSN391MR35S
	470	30 × 40	0.15	1.82	EKMS401VSN471MR40S
	470	35 × 30	0.15	1.85	EKMS401VSN471MA30S
	560	30 × 45	0.15	2.04	EKMS401VSN561MR45S
	560	30 × 50	0.15	2.07	EKMS401VSN561MR50S
	560	35 × 35	0.15	2.05	EKMS401VSN561MA35S
	680	35 × 40	0.15	2.34	EKMS401VSN681MA40S
	680	35 × 45	0.15	2.40	EKMS401VSN681MA45S
	820	35 × 50	0.15	2.69	EKMS401VSN821MA50S
420	100	22 × 25	0.20	0.70	EKMS421VSN100MP25S
	120	22 × 30	0.20	0.81	EKMS421VSN121MP30S
	120	25.4 × 25	0.20	0.81	EKMS421VSN121MQ25S
	150	22 × 35	0.20	0.93	EKMS421VSN151MP35S
	180	22 × 40	0.20	1.04	EKMS421VSN181MP40S
	180	25.4 × 30	0.20	1.02	EKMS421VSN181MQ30S
	180	30 × 25	0.20	1.06	EKMS421VSN181MR25S
	220	22 × 45	0.20	1.17	EKMS421VSN221MP45S
	220	22 × 50	0.20	1.20	EKMS421VSN221MP50S
	220	25.4 × 35	0.20	1.18	EKMS421VSN221MQ35S
	220	30 × 30	0.20	1.18	EKMS421VSN221MR30S
	270	25.4 × 40	0.20	1.33	EKMS421VSN271MQ40S
	270	25.4 × 45	0.20	1.36	EKMS421VSN271MQ45S
	270	35 × 25	0.20	1.38	EKMS421VSN271MA25S
	330	25.4 × 50	0.20	1.52	EKMS421VSN331MQ50S
	330	30 × 35	0.20	1.48	EKMS421VSN331MR35S
	330	30 × 40	0.20	1.52	EKMS421VSN331MR40S
	330	35 × 30	0.20	1.55	EKMS421VSN331MA30S
390	30 × 45	0.20	1.70	EKMS421VSN391MR45S	
390	35 × 35	0.20	1.71	EKMS421VSN391MA35S	
470	30 × 50	0.20	1.90	EKMS421VSN471MR50S	
470	35 × 40	0.20	1.95	EKMS421VSN471MA40S	
560	35 × 45	0.20	2.17	EKMS421VSN561MA45S	
680	35 × 50	0.20	2.45	EKMS421VSN681MA50S	
450	82	22 × 25	0.20	0.64	EKMS451VSN820MP25S
	120	22 × 30	0.20	0.81	EKMS451VSN121MP30S
	120	22 × 35	0.20	0.83	EKMS451VSN121MP35S
	120	25.4 × 25	0.20	0.81	EKMS451VSN121MQ25S
	150	22 × 40	0.20	0.94	EKMS451VSN151MP40S
	150	25.4 × 30	0.20	0.93	EKMS451VSN151MQ30S
	180	22 × 45	0.20	1.06	EKMS451VSN181MP45S
	180	25.4 × 35	0.20	1.06	EKMS451VSN181MQ35S
	180	30 × 25	0.20	1.06	EKMS451VSN181MR25S
	220	22 × 50	0.20	1.20	EKMS451VSN221MP50S
	220	25.4 × 40	0.20	1.20	EKMS451VSN221MQ40S
	220	30 × 30	0.20	1.18	EKMS451VSN221MR30S
	220	35 × 25	0.20	1.24	EKMS451VSN221MA25S
	270	25.4 × 45	0.20	1.36	EKMS451VSN271MQ45S
	270	25.4 × 50	0.20	1.38	EKMS451VSN271MQ50S
	270	30 × 35	0.20	1.34	EKMS451VSN271MR35S
	270	35 × 30	0.20	1.40	EKMS451VSN271MA30S
	330	30 × 40	0.20	1.52	EKMS451VSN331MR40S
	390	30 × 45	0.20	1.70	EKMS451VSN391MR45S
	390	30 × 50	0.20	1.73	EKMS451VSN391MR50S
	390	35 × 35	0.20	1.71	EKMS451VSN391MA35S
	470	35 × 40	0.20	1.95	EKMS451VSN471MA40S
	470	35 × 45	0.20	1.99	EKMS451VSN471MA45S
	560	35 × 50	0.20	2.22	EKMS451VSN561MA50S

WV (V <sub>dc</sub> )	Cap (µF)	Case size ϕD×L(mm)	tan δ	Rated ripple current (Arms/105°C, 120Hz)	Part No.
500	47	22 × 25	0.20	0.51	EKMS501VSN470MP25S
	56	22 × 30	0.20	0.58	EKMS501VSN560MP30S
	68	25.4 × 25	0.20	0.65	EKMS501VSN680MQ25S
	82	22 × 35	0.20	0.72	EKMS501VSN820MP35S
	82	25.4 × 30	0.20	0.74	EKMS501VSN820MQ30S
	100	22 × 45	0.20	0.83	EKMS501VSN101MP45S
	100	30 × 25	0.20	0.82	EKMS501VSN101MR25S
	120	22 × 50	0.20	0.93	EKMS501VSN121MP50S
	120	25.4 × 35	0.20	0.93	EKMS501VSN121MQ35S
	120	30 × 30	0.20	0.91	EKMS501VSN121MR30S
	150	25.4 × 45	0.20	1.08	EKMS501VSN151MR45S
	150	30 × 35	0.20	1.04	EKMS501VSN151MR35S
	150	35 × 25	0.20	0.99	EKMS501VSN151MA25S
	180	25.4 × 50	0.20	1.20	EKMS501VSN181MQ50S
	180	30 × 40	0.20	1.17	EKMS501VSN181MR40S
	180	35 × 30	0.20	1.10	EKMS501VSN181MA30S
	220	30 × 45	0.20	1.33	EKMS501VSN221MR45S
	220	35 × 35	0.20	1.23	EKMS501VSN221MA35S
	270	30 × 50	0.20	1.50	EKMS501VSN271MR50S
270	35 × 40	0.20	1.42	EKMS501VSN271MA40S	
330	35 × 45	0.20	1.60	EKMS501VSN331MA45S	
390	35 × 50	0.20	1.78	EKMS501VSN391MA50S	
470	35 × 60	0.20	2.03	EKMS501VSN471MA60S	
550	82	22 × 35	0.20	0.72	EKMS551VSN820MP35S
	82	25.4 × 30	0.20	0.74	EKMS551VSN820MQ30S
	100	22 × 45	0.20	0.83	EKMS551VSN101MP45S
	100	25.4 × 35	0.20	0.85	EKMS551VSN101MQ35S
	100	30 × 25	0.20	0.82	EKMS551VSN101MR25S
	120	22 × 50	0.20	0.93	EKMS551VSN121MP50S
	120	25.4 × 40	0.20	0.95	EKMS551VSN121MQ40S
	120	30 × 30	0.20	0.91	EKMS551VSN121MR30S
	120	35 × 25	0.20	0.88	EKMS551VSN121MA25S
	150	25.4 × 45	0.20	1.08	EKMS551VSN151MQ45S
	150	30 × 35	0.20	1.04	EKMS551VSN151MR35S
	180	25.4 × 50	0.20	1.20	EKMS551VSN181MQ50S
	180	30 × 40	0.20	1.17	EKMS551VSN181MR40S
	180	35 × 30	0.20	1.10	EKMS551VSN181MA30S
	220	30 × 45	0.20	1.33	EKMS551VSN221MR45S
	220	35 × 35	0.20	1.23	EKMS551VSN221MA35S
270	30 × 50	0.20	1.50	EKMS551VSN271MR50S	
270	35 × 40	0.20	1.42	EKMS551VSN271MA40S	
330	35 × 45	0.20	1.60	EKMS551VSN331MA45S	
330	35 × 50	0.20	1.64	EKMS551VSN331MA50S	
470	35 × 60	0.20	2.03	EKMS551VSN471MA60S	
600	100	30 × 30	0.20	0.83	EKMS601VSN101MR30S
	100	35 × 25	0.20	0.85	EKMS601VSN101MA25S
	120	30 × 35	0.20	0.93	EKMS601VSN121MR35S
	150	30 × 40	0.20	1.07	EKMS601VSN151MR40S
	150	35 × 30	0.20	1.06	EKMS601VSN151MA30S
	180	30 × 45	0.20	1.20	EKMS601VSN181MR45S
	180	30 × 50	0.20	1.22	EKMS601VSN181MR50S
	180	35 × 35	0.20	1.18	EKMS601VSN181MA35S
	220	30 × 60	0.20	1.40	EKMS601VSN221MR60S
	220	35 × 40	0.20	1.35	EKMS601VSN221MA40S
	220	35 × 45	0.20	1.38	EKMS601VSN221MA45S
	270	35 × 50	0.20	1.56	EKMS601VSN271MA50S
	330	35 × 60	0.20	1.79	EKMS601VSN331MA60S

### ◆RATED RIPPLE CURRENT MULTIPLIERS

●Frequency Multipliers

Frequency(Hz)	50	120	300	1k	10k	50k
160 to 250V <sub>dc</sub>	0.81	1.00	1.17	1.32	1.45	1.50
315 to 450V <sub>dc</sub>	0.77	1.00	1.16	1.30	1.41	1.43
500 to 600V <sub>dc</sub>	0.70	1.00	1.16	1.30	1.41	1.43

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.