


PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

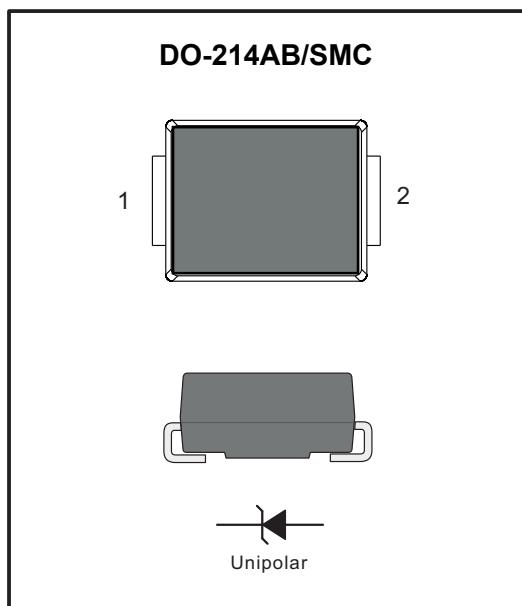

FEATURES

- ◆ For surface mounted applications
- ◆ Low profile package
- ◆ Glass Passivated Chip Junction
- ◆ Easy to pick and place
- ◆ Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- ◆ Case: SMC
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 0.22g / 0.0077oz

Absolute Maximum Ratings and Characteristics

Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	ES5A	ES5B	ES5C	ES5D	ES5E	ES5G	ES5J	Units		
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	150	200	300	400	600	V		
Maximum RMS voltage	V _{RMS}	35	70	105	140	210	280	420	V		
Maximum DC Blocking Voltage	V _{DC}	50	100	150	200	300	400	600	V		
Maximum Average Forward Rectified Current at T _c = 100 °C	I _{F(AV)}	5						A			
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load	I _{FSM}	120						A			
Maximum Forward Voltage at 5 A	V _F	1			1.25		1.68	V			
Maximum DC Reverse Current T _a = 25 °C at Rated DC Blocking Voltage T _a = 125 °C	I _R	5 100						μA			
Typical Junction Capacitance at V _R =4V, f=1MHz	C _j	50						pF			
Maximum Reverse Recovery Time ⁽¹⁾	t _{rr}	35						ns			
Typical Thermal Resistance ⁽²⁾	R _{θJA} R _{θJC}	35 13						°C/W			
Operating and Storage Temperature Range	T _j , T _{stg}	-55 ~ +150						°C			

(1) Measured with I_r = 0.5 A, I_R = 1 A, I_{rr} = 0.25 A.

(2) P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

Typical Characteristics

Fig.1 Reverse Recovery Time Characteristic And Test Circuit Diagram

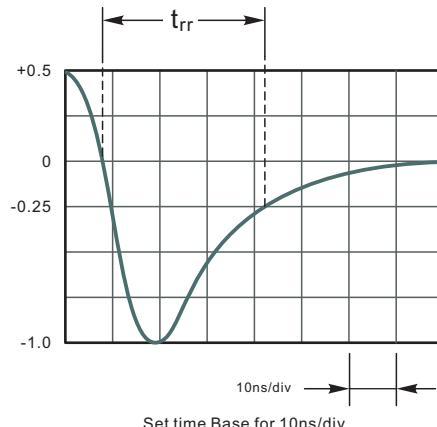
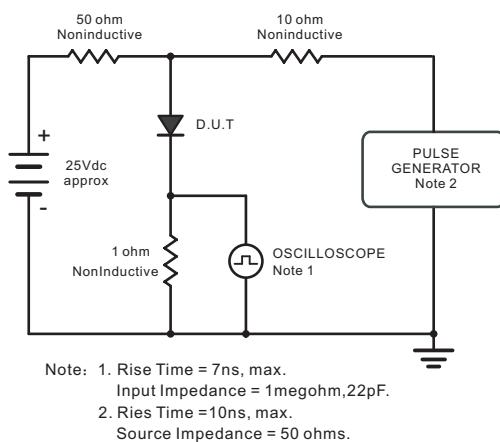


Fig.2 Maximum Average Forward Current Rating

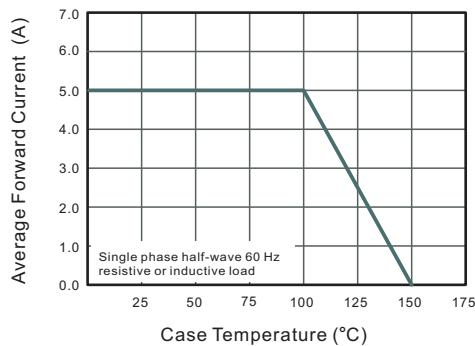


Fig.4 Typical Forward Characteristics

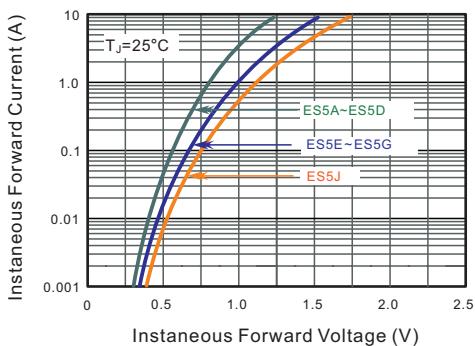


Fig.3 Typical Reverse Characteristics

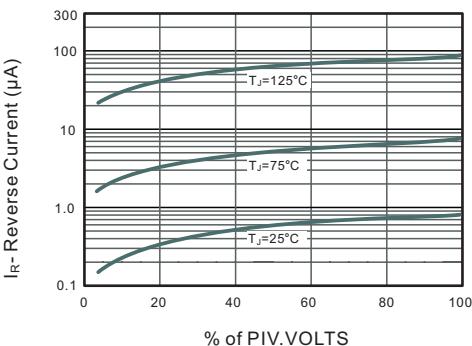


Fig.5 Typical Junction Capacitance


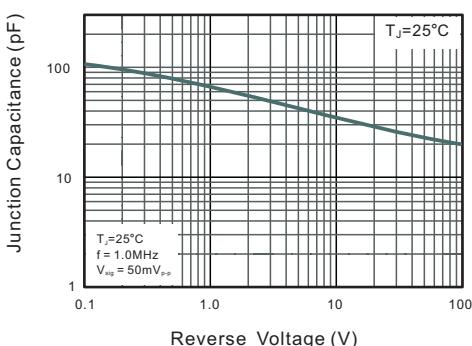



Fig.6 Maximum Non-Repetitive Peak Forward Surge Current

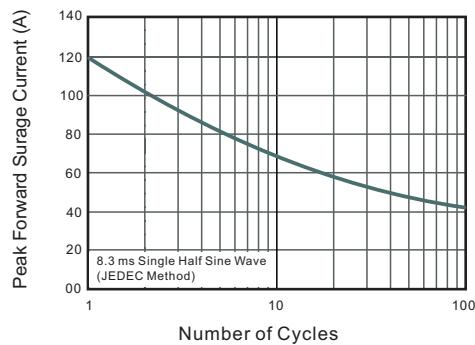

PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SMC

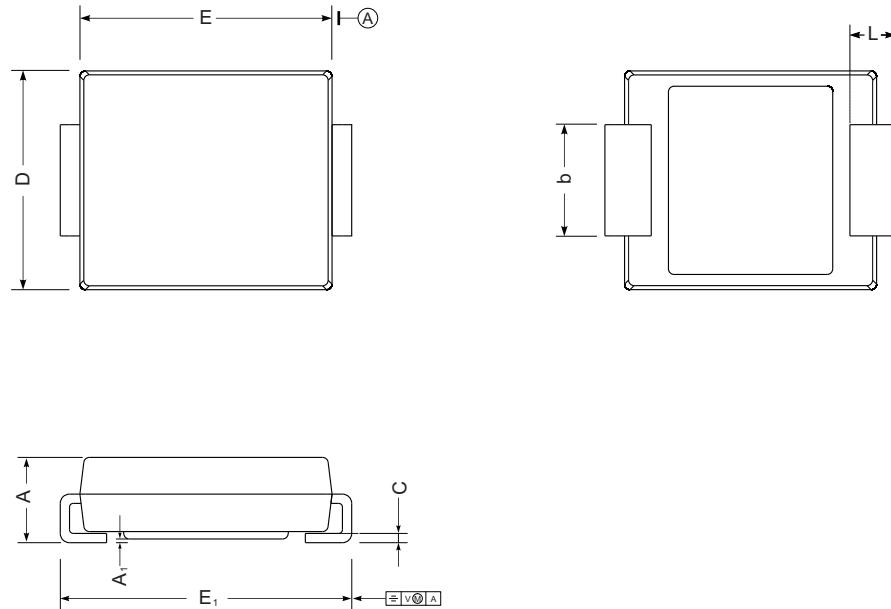

SMC mechanical data

UNIT		A	E	D	E ₁	A ₁	C	L	b
mm	max	2.62	7.0	6.2	8.0	0.21	0.31	1.6	3.25
	min	2.00	6.5	5.6	7.6	0.05	0.15	0.9	2.75
mil	max	103	276	244	315	8.3	12	63	128
	min	79	256	220	299	2.0	5.9	35	108

The recommended mounting pad size

