

# IGBT – Power, Co-PAK

## N-Channel, Field Stop VII (FS7), SCR, Power TO247-3L, 1200 V, 1.4 V, 100 A

### FGY100T120RWD

#### Description

Using the novel field stop 7<sup>th</sup> generation IGBT technology and the Gen7 Diode in TO247 3-lead package, FGY100T120RWD offers the optimum performance with low conduction losses and good switching controllability for a high efficiency operation in various applications like motor control, UPS, data center and high-power switch.

#### Features

- Low Conduction Loss and Optimized Switching
- Maximum Junction Temperature –  $T_J = 175^\circ\text{C}$
- Positive Temperature Coefficient for Easy Parallel Operation
- High Current Capability
- 100% of the Parts are Dynamically Tested
- Short Circuit Rated
- RoHS Compliant

#### Applications

- Motor Control
- UPS
- General Application Requiring High Power Switch



#### MAXIMUM RATINGS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Collector-to-Emitter Voltage	$V_{CES}$	1200	V
Gate-to-Emitter Voltage	$V_{GES}$	$\pm 20$	V
Transient Gate-to-Emitter Voltage		$\pm 30$	
Collector Current	$I_C$	$T_C = 25^\circ\text{C}$	A
		$T_C = 100^\circ\text{C}$	
Power Dissipation	$P_D$	$T_C = 25^\circ\text{C}$	W
		$T_C = 100^\circ\text{C}$	
Pulsed Collector Current	$I_{CM}$	$T_C = 25^\circ\text{C}$ , $t_p = 10 \mu\text{s}$ (Note 1)	A
Diode Forward Current	$I_F$	$T_C = 25^\circ\text{C}$	200
		$T_C = 100^\circ\text{C}$	100
Pulsed Diode Forward Current	$I_{FM}$	$T_C = 25^\circ\text{C}$ , $t_p = 10 \mu\text{s}$ (Note 1)	300
Short Circuit Withstand Time $V_{GE} = 15 \text{ V}$ , $V_{CC} = 600 \text{ V}$ , $T_C = 150^\circ\text{C}$	$T_{SC}$	5	$\mu\text{s}$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 175	$^\circ\text{C}$
Lead Temperature for Soldering Purposes	$T_L$	260	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


$BV_{CES}$	$V_{CE(SAT)}$	$I_C$
1200 V	1.4 V	100 A

#### PIN CONNECTIONS



TO247-3LD  
CASE 340CD

#### MARKING DIAGRAM



\$Y = onsemi logo  
&Z = Assembly Plant Code  
&3 = 3-Digit Date Code  
&K = 2-Digit Lot Traceability Code  
FGY100T120RWD = Specific Device Code

#### ORDERING INFORMATION

Device	Package	Shipping
FGY100T120RWD	TO247-3LD (Pb-Free)	30 Units / Tube

# FGY100T120RWD

1. Repetitive rating: pulse width limited by max. Junction temperature.

## THERMAL CHARACTERISTICS

Parameter	Symbol	Max Value	Unit
Thermal Resistance, Junction-to-Case for IGBT	R <sub>θJC</sub>	0.14	°C/W
Thermal Resistance, Junction-to-Case for Diode		0.23	
Thermal Resistance, Junction-to-Ambient	R <sub>θJA</sub>	40	

## ELECTRICAL CHARACTERISTICS OF THE IGBT (T<sub>J</sub> = 25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
-----------	--------	-----------------	-----	-----	-----	------

### OFF CHARACTERISTICS

Collector-to-Emitter Breakdown Voltage	BV <sub>CES</sub>	V <sub>GE</sub> = 0 V, I <sub>C</sub> = 5 mA	1200	-	-	V
Breakdown Voltage Temperature Coefficient	ΔBV <sub>CES</sub> / ΔT <sub>J</sub>	V <sub>GE</sub> = 0 V, I <sub>C</sub> = 5 mA	-	1221	-	mV/°C
Collector-to-Emitter Cut-Off Current	I <sub>CES</sub>	V <sub>GE</sub> = 0 V, V <sub>CE</sub> = V <sub>CES</sub>	-	-	40	μA
Gate-to-Emitter Leakage Current	I <sub>GES</sub>	V <sub>GE</sub> = 20 V, V <sub>CE</sub> = 0 V	-	-	±400	nA

### ON CHARACTERISTICS

Gate-to-Emitter Threshold Voltage	V <sub>GE(TH)</sub>	V <sub>GE</sub> = V <sub>CE</sub> , I <sub>C</sub> = 100 mA	4.9	5.92	6.7	V
Collector-to-Emitter Saturation Voltage	V <sub>CE(SAT)</sub>	V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A, T <sub>J</sub> = 25°C	1.15	1.43	1.75	V
		V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A, T <sub>J</sub> = 175°C	-	1.66	-	

### DYNAMIC CHARACTERISTICS

Input Capacitance	C <sub>IES</sub>	V <sub>CE</sub> = 30 V, V <sub>GE</sub> = 0 V, f = 1 MHz	-	12200	-	pF
Output Capacitance	C <sub>OES</sub>		-	392	-	
Reverse Transfer Capacitance	C <sub>RES</sub>		-	44.2	-	
Total Gate Charge	Q <sub>G</sub>	V <sub>CE</sub> = 600 V, V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A	-	427	-	nC
Gate to Emitter Charge	Q <sub>GE</sub>		-	108	-	
Gate to Collector Charge	Q <sub>GC</sub>		-	161	-	

### SWITCHING CHARACTERISTIC, INDUCTIVE LOAD

Turn-On Delay Time	t <sub>d(on)</sub>	V <sub>CE</sub> = 600 V, V <sub>GE</sub> = 15 V, I <sub>C</sub> = 50 A, R <sub>G</sub> = 4.7 Ω, T <sub>J</sub> = 25°C	-	74	-	ns	
Turn-Off Delay Time	t <sub>d(off)</sub>		-	464	-		
Rise Time	t <sub>r</sub>		-	45	-		
Fall Time	t <sub>f</sub>		-	196	-		
Turn-On Switching Loss	E <sub>on</sub>	V <sub>CE</sub> = 600 V, V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A, R <sub>G</sub> = 4.7 Ω, T <sub>J</sub> = 25°C	-	3.43	-	mJ	
Turn-Off Switching Loss	E <sub>off</sub>		-	4.54	-		
Total Switching Loss	E <sub>ts</sub>		-	7.97	-		
Turn-On Delay Time	t <sub>d(on)</sub>		V <sub>CE</sub> = 600 V, V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A, R <sub>G</sub> = 4.7 Ω, T <sub>J</sub> = 25°C	-	80	-	ns
Turn-Off Delay Time	t <sub>d(off)</sub>			-	364	-	
Rise Time	t <sub>r</sub>			-	85	-	
Fall Time	t <sub>f</sub>			-	180	-	
Turn-On Switching Loss	E <sub>on</sub>	V <sub>CE</sub> = 600 V, V <sub>GE</sub> = 15 V, I <sub>C</sub> = 100 A, R <sub>G</sub> = 4.7 Ω, T <sub>J</sub> = 25°C	-	8.13	-	mJ	
Turn-Off Switching Loss	E <sub>off</sub>		-	7.05	-		
Total Switching Loss	E <sub>ts</sub>		-	15.18	-		

# FGY100T120RWD

## ELECTRICAL CHARACTERISTICS OF THE IGBT ( $T_J = 25^\circ\text{C}$ unless otherwise noted) (continued)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
<b>SWITCHING CHARACTERISTIC, INDUCTIVE LOAD</b>						
Turn-On Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 50\text{ A}, R_G = 4.7\ \Omega,$ $T_J = 175^\circ\text{C}$	-	70	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	536	-	
Rise Time	$t_r$		-	50	-	
Fall Time	$t_f$		-	348	-	
Turn-On Switching Loss	$E_{on}$		-	5.58	-	mJ
Turn-Off Switching Loss	$E_{off}$		-	6.83	-	
Total Switching Loss	$E_{ts}$		-	12.41	-	
Turn-On Delay Time	$t_{d(on)}$	$V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V},$ $I_C = 100\text{ A}, R_G = 4.7\ \Omega,$ $T_J = 175^\circ\text{C}$	-	78	-	ns
Turn-Off Delay Time	$t_{d(off)}$		-	412	-	
Rise Time	$t_r$		-	93	-	
Fall Time	$t_f$		-	316	-	
Turn-On Switching Loss	$E_{on}$		-	12.00	-	mJ
Turn-Off Switching Loss	$E_{off}$		-	10.30	-	
Total Switching Loss	$E_{ts}$		-	22.30	-	

### DIODE CHARACTERISTIC

Diode Forward Voltage	$V_F$	$I_F = 100\text{ A}, T_J = 25^\circ\text{C}$	1.46	1.80	2.08	V
		$I_F = 100\text{ A}, T_J = 175^\circ\text{C}$	-	1.90	-	

### DIODE SWITCHING CHARACTERISTIC, INDUCTIVE LOAD

Reverse Recovery Time	$t_{rr}$	$V_R = 600\text{ V}, I_F = 50\text{ A},$ $di_F/dt = 500\text{ A}/\mu\text{s},$ $T_J = 25^\circ\text{C}$	-	256	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	3140	-	nC
Reverse Recovery Energy	$E_{rec}$		-	1	-	mJ
Peak Reverse Recovery Current	$I_{RRM}$		-	24.5	-	A
Reverse Recovery Time	$t_{rr}$	$V_R = 600\text{ V}, I_F = 100\text{ A},$ $di_F/dt = 500\text{ A}/\mu\text{s},$ $T_J = 25^\circ\text{C}$	-	347	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	4408	-	nC
Reverse Recovery Energy	$E_{rec}$		-	2	-	mJ
Peak Reverse Recovery Current	$I_{RRM}$		-	25.8	-	A
Reverse Recovery Time	$t_{rr}$	$V_R = 600\text{ V}, I_F = 50\text{ A},$ $di_F/dt = 500\text{ A}/\mu\text{s},$ $T_J = 175^\circ\text{C}$	-	424	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	8610	-	nC
Reverse Recovery Energy	$E_{rec}$		-	4	-	mJ
Peak Reverse Recovery Current	$I_{RRM}$		-	40.8	-	A
Reverse Recovery Time	$t_{rr}$	$V_R = 600\text{ V}, I_F = 100\text{ A},$ $di_F/dt = 500\text{ A}/\mu\text{s},$ $T_J = 175^\circ\text{C}$	-	572	-	ns
Reverse Recovery Charge	$Q_{rr}$		-	12476	-	nC
Reverse Recovery Energy	$E_{rec}$		-	5	-	mJ
Peak Reverse Recovery Current	$I_{RRM}$		-	43.6	-	A

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# FGY100T120RWD

## TYPICAL CHARACTERISTICS

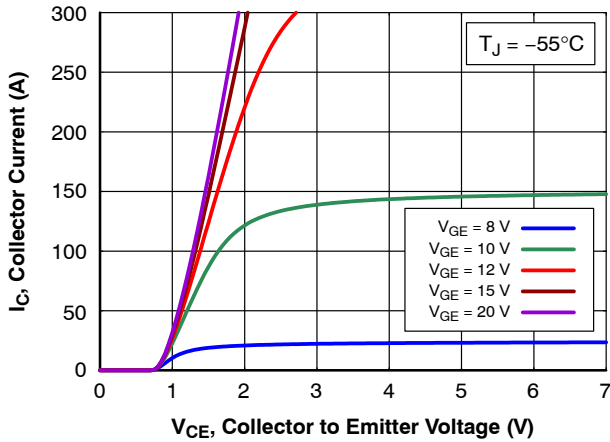


Figure 1. Output Characteristics

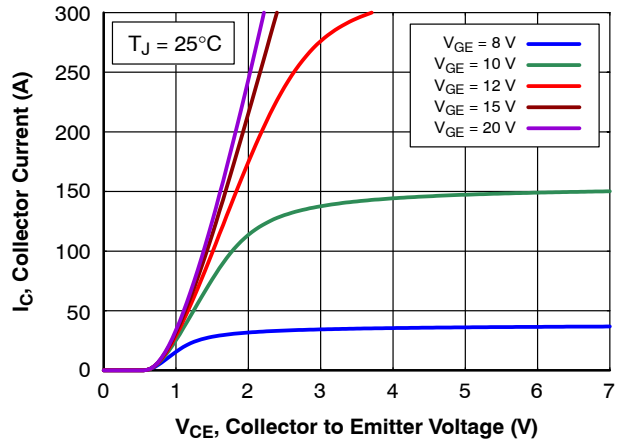


Figure 2. Output Characteristics

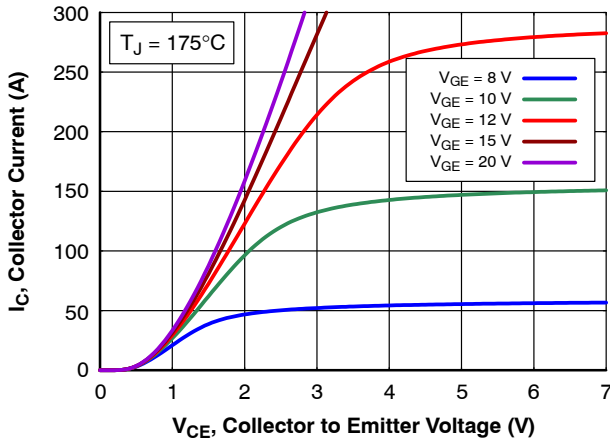


Figure 3. Output Characteristics

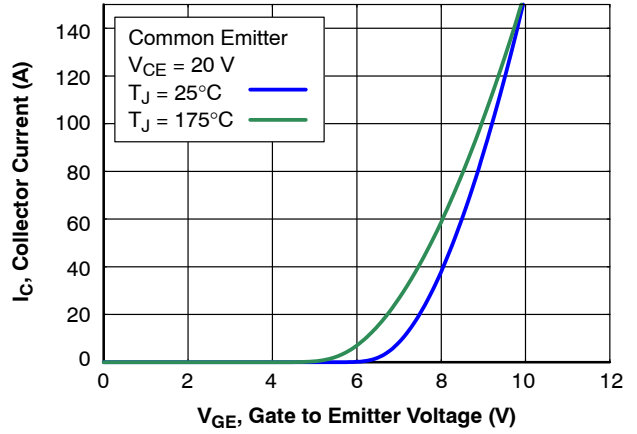


Figure 4. Transfer Characteristics

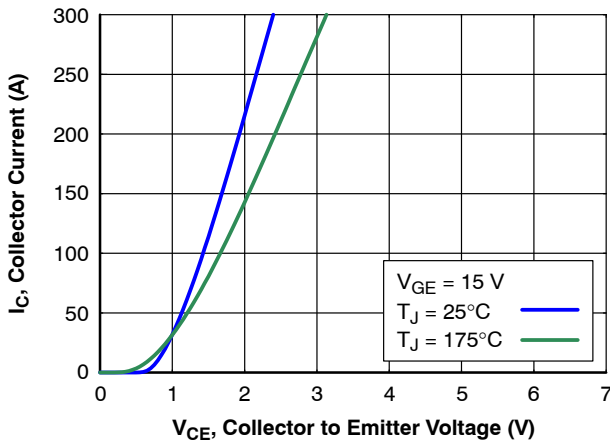


Figure 5. Saturation Voltage Characteristics

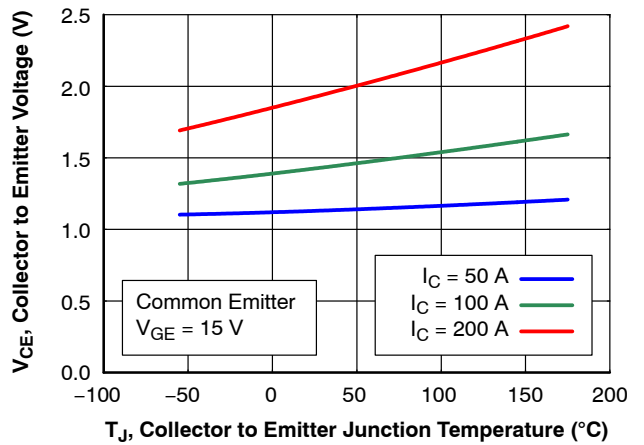


Figure 6. Saturation Voltage vs Junction Temperature

# FGY100T120RWD

## TYPICAL CHARACTERISTICS (CONTINUED)

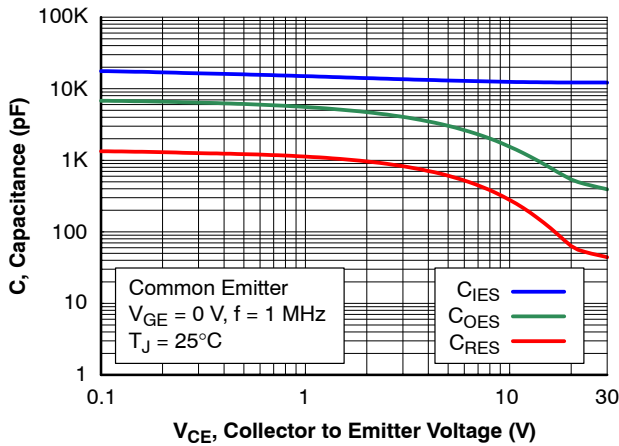


Figure 7. Capacitance Characteristics

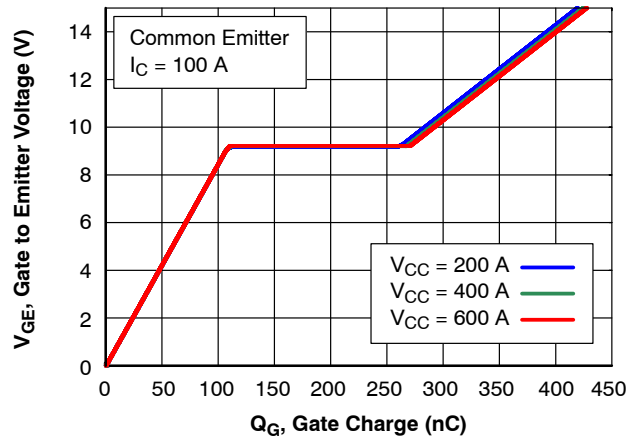


Figure 8. Gate Charge Characteristics

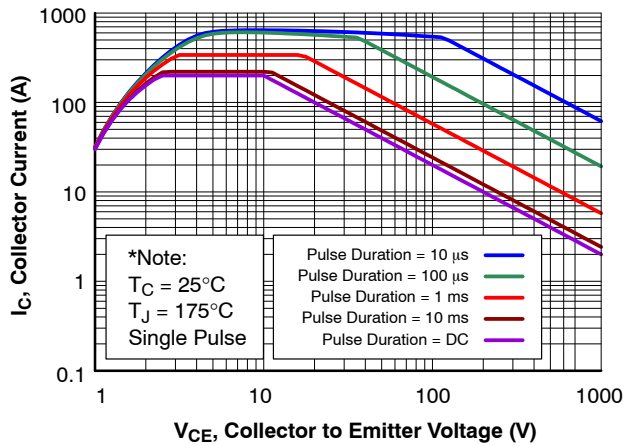


Figure 9. SOA Characteristics

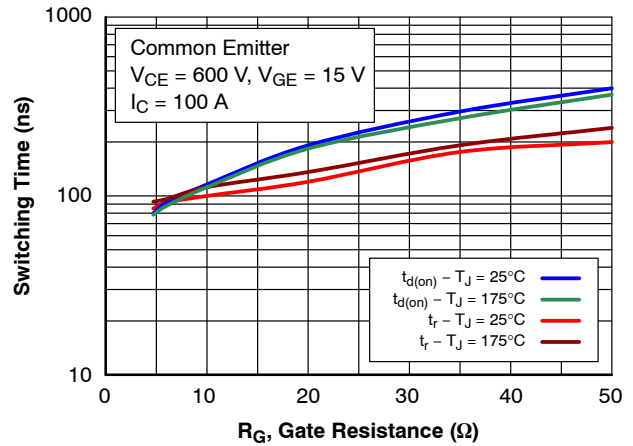


Figure 10. Turn-On Time vs Gate Resistance

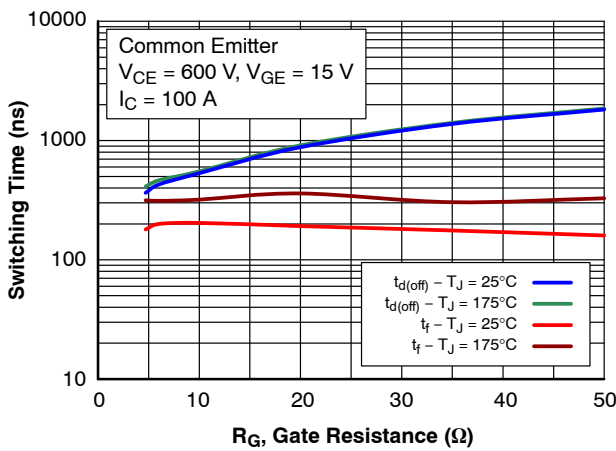


Figure 11. Turn-Off Time vs Gate Resistance

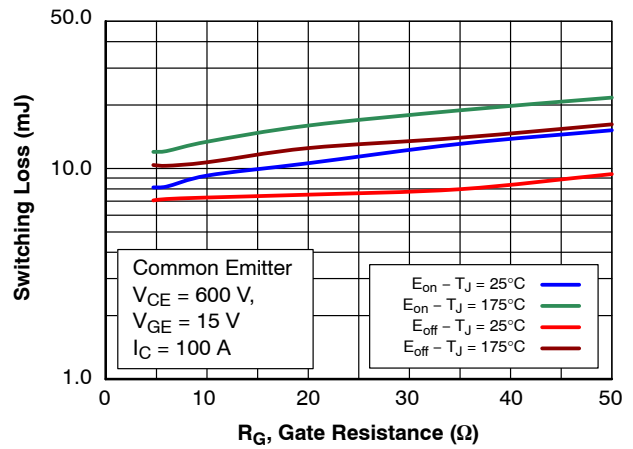


Figure 12. Switching Loss vs Gate Resistance

# FGY100T120RWD

## TYPICAL CHARACTERISTICS (CONTINUED)

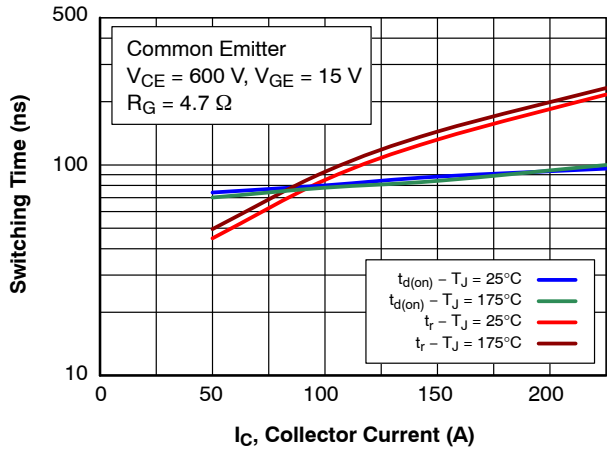


Figure 13. Turn-On Time vs Collector Current

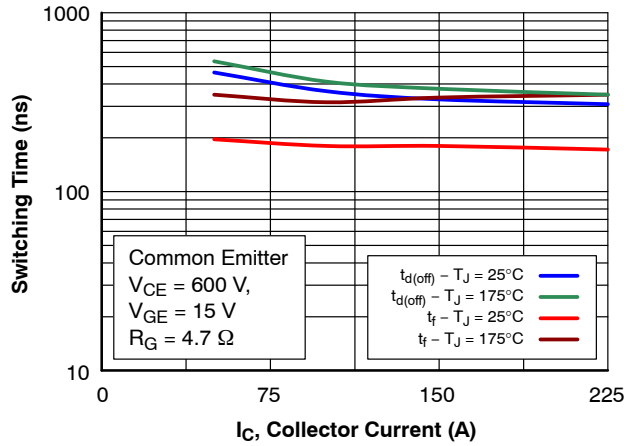


Figure 14. Turn-Off Time vs Collector Current

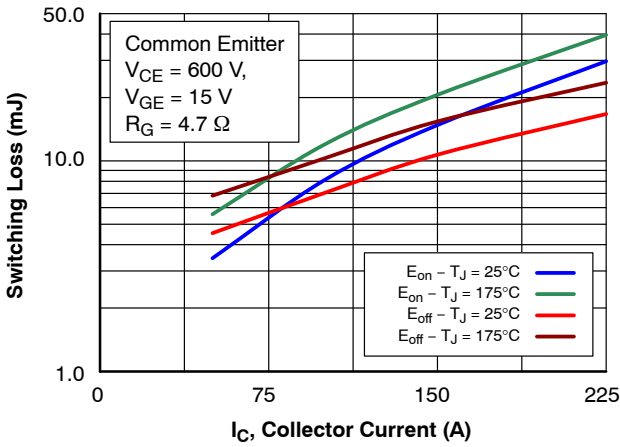


Figure 15. Switching Loss vs Collector Current

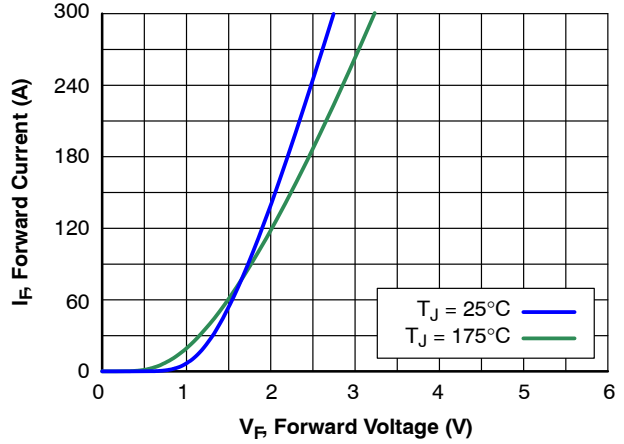


Figure 16. Diode Forward Characteristics

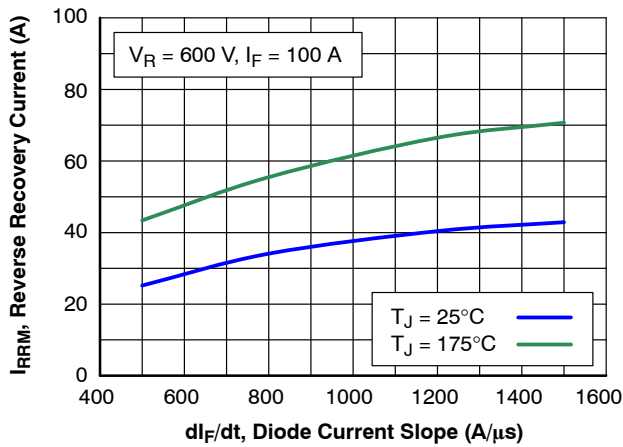


Figure 17. Diode Reverse Recovery Current

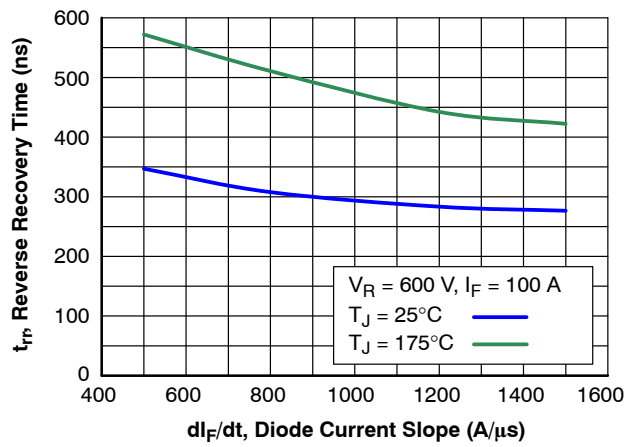


Figure 18. Diode Reverse Recovery Time

# FGY100T120RWD

## TYPICAL CHARACTERISTICS (CONTINUED)

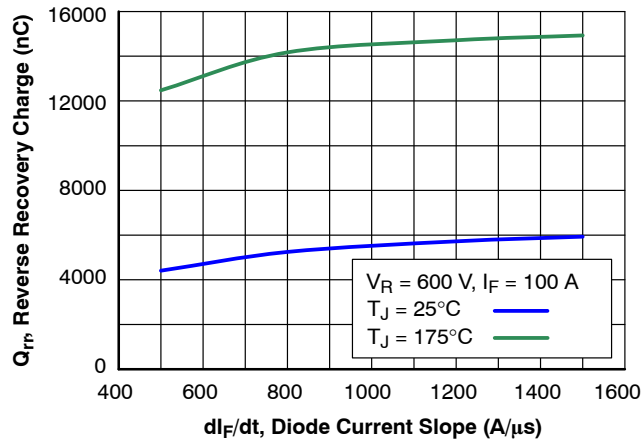


Figure 19. Diode Stored Charge Characteristics

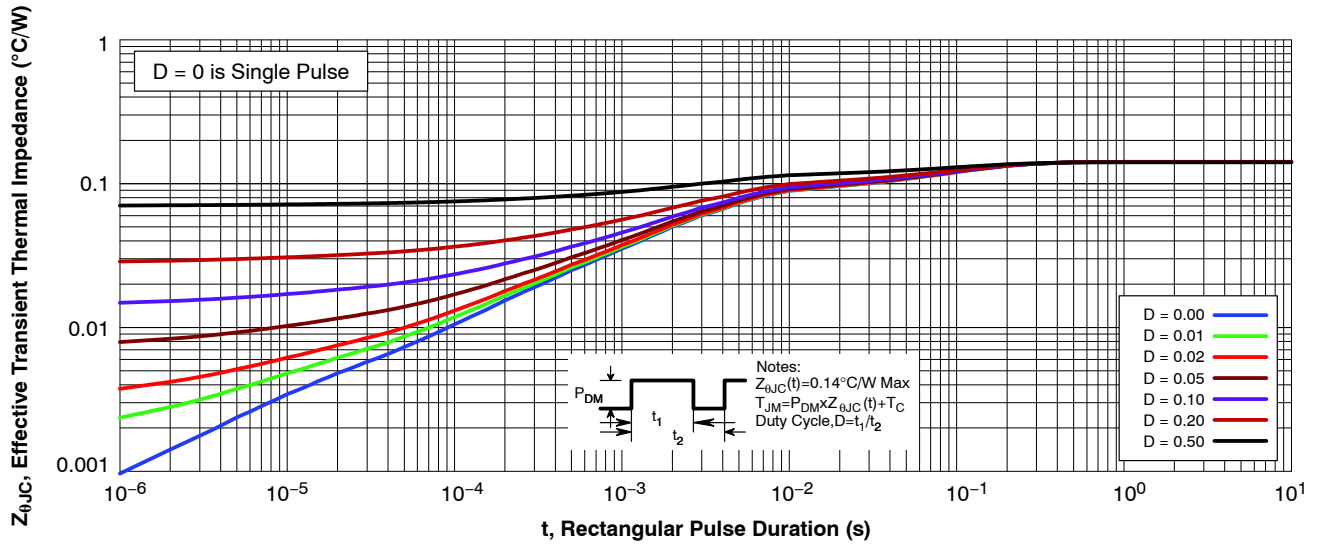


Figure 20. Transient Thermal Impedance of IGBT


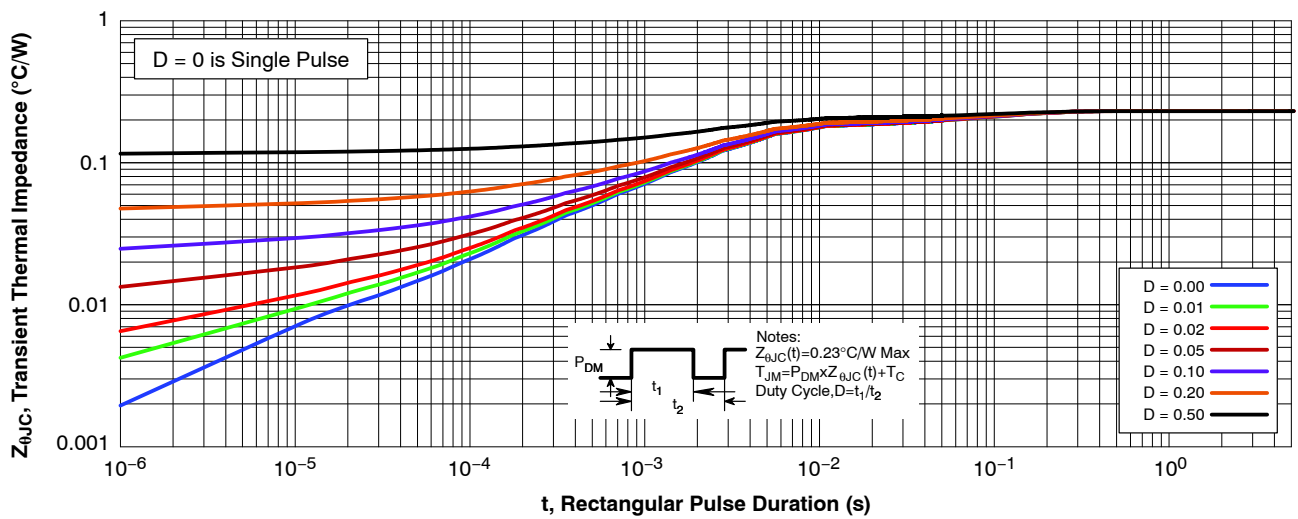


Figure 21. Transient Thermal Impedance of Diode

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®




TO-247-3LD  
CASE 340CD  
ISSUE A

DATE 18 SEP 2018

**NOTES:**

- A. THIS PACKAGE DOES NOT CONFORM TO ANY STANDARDS.
- B. ALL DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH AND TIE BAR PROTRUSIONS.
- D. DIMENSION AND TOLERANCE AS PER ASME Y14.5-2009.

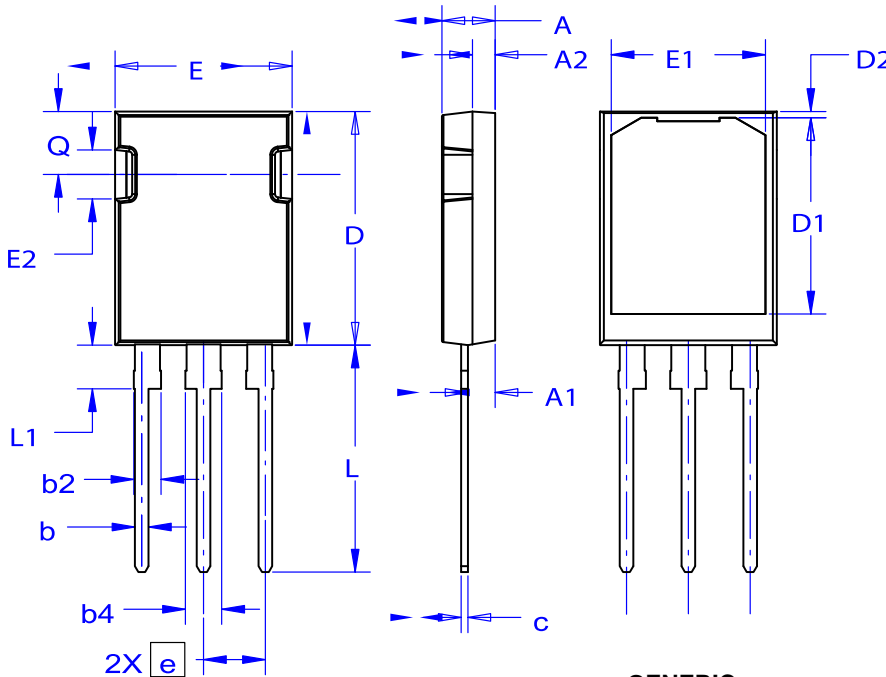

DIM	MILLIMETERS		
	MIN	NOM	MAX
A	4.58	4.70	4.82
A1	2.20	2.40	2.60
A2	1.80	2.00	2.20
D	20.32	20.57	20.82
E	15.37	15.62	15.87
E2	4.12	4.32	4.52
e	~	5.45	~
L	19.90	20.00	20.10
L1	3.69	3.81	3.93
Q	5.34	5.46	5.58
b	1.10	1.20	1.30
b2	2.10	2.24	2.39
b4	2.87	3.04	3.20
c	0.51	0.61	0.71
D1	16.63	16.83	17.03
D2	0.51	0.93	1.35
E1	13.40	13.60	13.80

**GENERIC MARKING DIAGRAM\***



- XXXX = Specific Device Code
- A = Assembly Location
- Y = Year
- WW = Work Week
- G = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

<b>DOCUMENT NUMBER:</b>	<b>98AON13857G</b>	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
<b>DESCRIPTION:</b>	<b>TO-247-3LD</b>	<b>PAGE 1 OF 1</b>

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.



**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)

