

RSAN SERIES

Multipurpose Single-Phase Filter Compatible with High-Voltage Pulse




■ FEATURES

- Amorphous core is used for common mode core to help prevent failure due to pulse noise.
- Self-tightening screws and an open/close type cover make wiring work easier.
- Optional low-leakage current characteristic type and DIN rail installation compatible type are also available.

■ SAFETY STANDARDS

UL1283
CSA C22.2 No.8
EN60939-1/-2 (ENEC14)


■ PRODUCT IDENTIFICATION

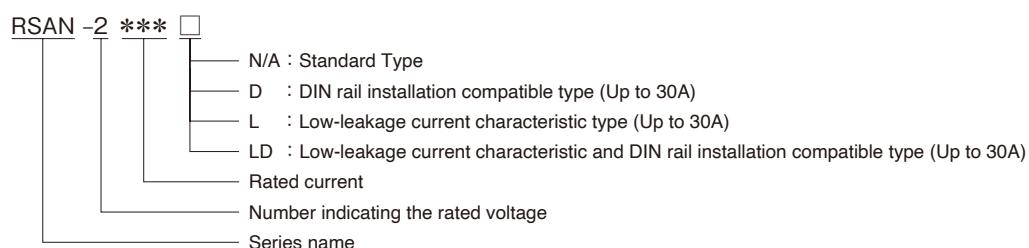


■ CONFORMITY TO RoHS Directive

■ CIRCUIT DIAGRAMS

RSAN2 ***
RSAN2 *** D

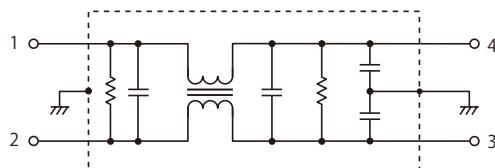

RSAN2 *** L

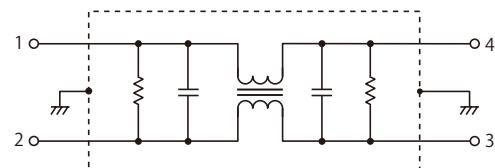

web231206

RSAN SERIES

Multipurpose Single-Phase Filter Compatible with High-Voltage Pulse



■ FEATURES

- Amorphous core is used for common mode core to help prevent failure due to pulse noise.
- Self-tightening screws and an open/close type cover make wiring work easier.
- Optional low-leakage current characteristic type and DIN rail installation compatible type are also available.


■ SAFETY STANDARDS

UL1283

CSA C22.2 No.8

EN60939-1/-2 (ENEC14)


■ PRODUCT IDENTIFICATION

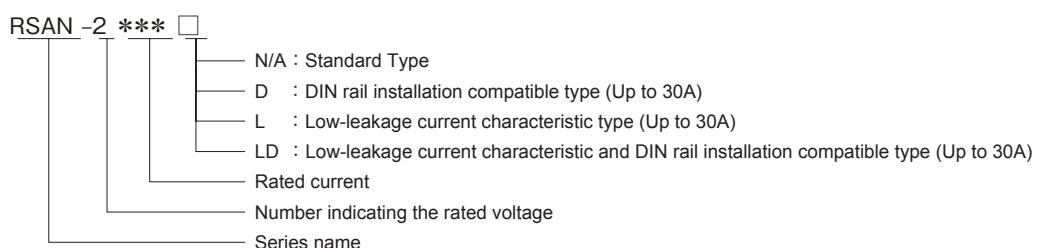


■ CONFORMITY TO RoHS Directive

■ CIRCUIT DIAGRAMS

RSAN-2 ***
RSAN-2 *** D

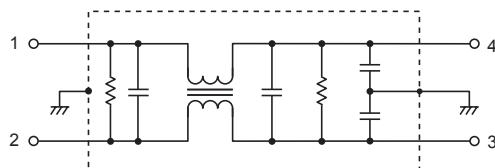


RSAN-2 *** L

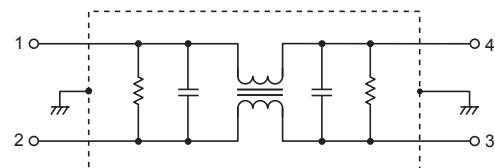

■ ELECTRICAL CHARACTERISTICS


Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)			Weight (g)
									Common mode		Differential mode	
									at 25dB	at 20dB	at 25dB	
RSAN-2003	250V	3A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min]	1.0mA max. [250V/60Hz]	-25 to +85°C	55°C	250 max.	0.1 to 10	-	0.1 to 30	170
RSAN-2006		6A						110 max.	0.1 to 10	-	0.1 to 30	230
RSAN-2010		10A						40 max.	0.3 to 10	-	0.2 to 30	230
RSAN-2016		16A						20 max.	0.8 to 10	-	0.3 to 30	230
RSAN-2020		20A						10 max.	1 to 10	-	0.3 to 30	230
RSAN-2030		30A						6 max.	2 to 10	-	0.4 to 30	230
RSAN-2040		40A						6 max.	0.8 to 10	-	0.1 to 30	870
RSAN-2050		50A						4 max.	-	1 to 10	0.1 to 30	870
RSAN-2060		60A						3 max.	2 to 10	-	0.2 to 30	870
Part No.	Rated voltage (AC/DC)	Rated current (AC/DC)	Withstand voltage	Insulation resistance	Leakage current	Operating temperature range	With derating over	DC resistance (mΩ)	Attenuation frequency range (MHz)			Weight (g)
									Common mode		Differential mode	
									at 20dB	at 10dB	at 25dB	
RSAN-2003L	250V	3A	AC.2500V 60s [Between line to ground]	100MΩ min. [DC.500V/ 1min]	10 μA max. [250V/60Hz]	-25 to +85°C	55°C	250 max.	0.1 to 3	-	0.1 to 30	170
RSAN-2006L		6A						110 max.	0.1 to 3	-	0.1 to 30	230
RSAN-2010L		10A						40 max.	0.5 to 6	-	0.2 to 30	230
RSAN-2016L		16A						20 max.	-	0.3 to 10	0.3 to 30	230
RSAN-2020L		20A						10 max.	-	0.5 to 8	0.3 to 30	230
RSAN-2030L		30A						6 max.	-	3 to 20	0.4 to 30	230

■ DERATING GRAPH

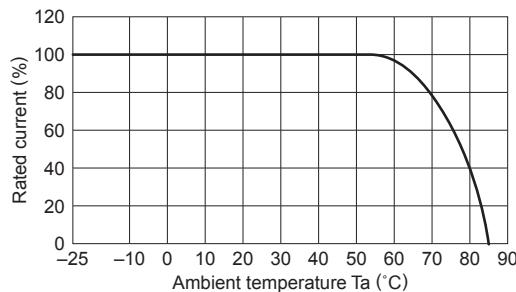


■ MECHANICAL

RSAN-2003/2006/2010/2016/2020/2030

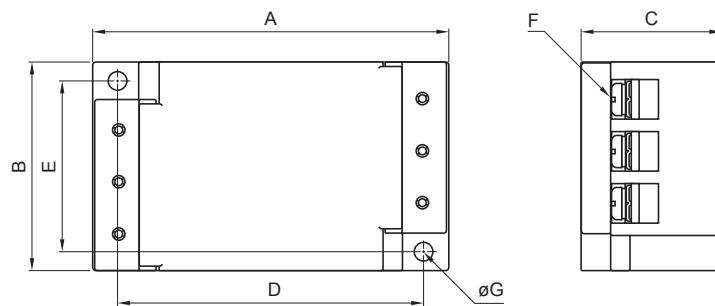


RSAN-2040/2050/2060

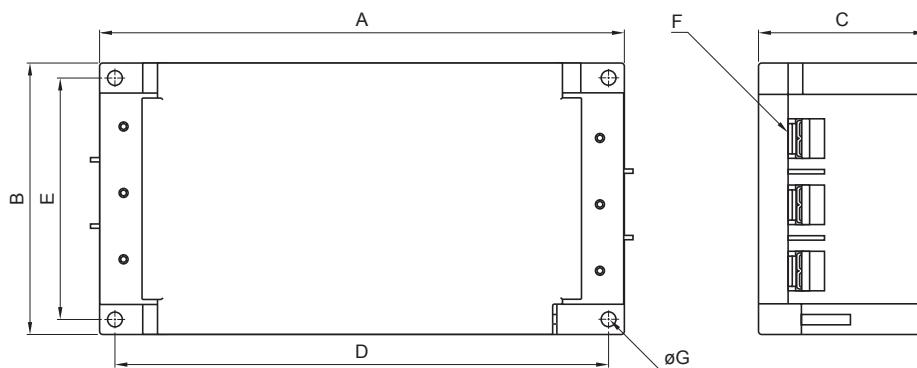

Dimensions in mm

Part No.	A	B	C	D	E	F	ϕ G	Recommended clamping torque
RSAN-2003	87	52	35	75	43	M4	4.5	1.27N · m
RSAN-2006								
RSAN-2010								
RSAN-2016								
RSAN-2020								
RSAN-2030								
RSAN-2040	170	90	54	160	80	M5	4.5	2.5N · m
RSAN-2050								
RSAN-2060								

RSAN-2003D/2006D/2010D/2016D/2020D/2030D

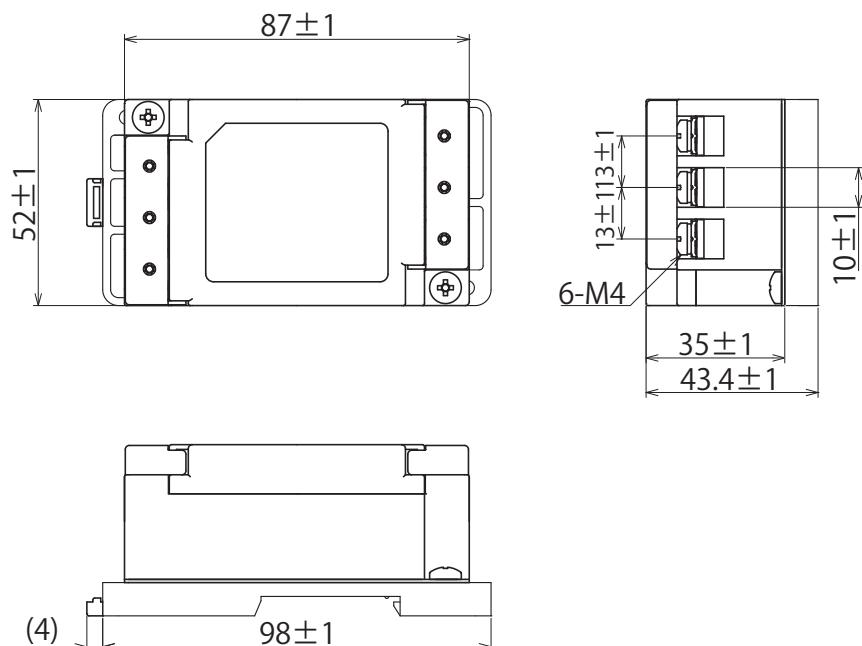


Dimensions in mm

*Please see the next page: "Precautions of DIN rail mounting".


Precautions of DIN rail mounting

When installing on a DIN rail, secure a space with a depth of 14 mm or more from the top of the rail. If there is no depth space, the tip of the DIN attachment and the installation surface may interfere and it may not be possible to install it.

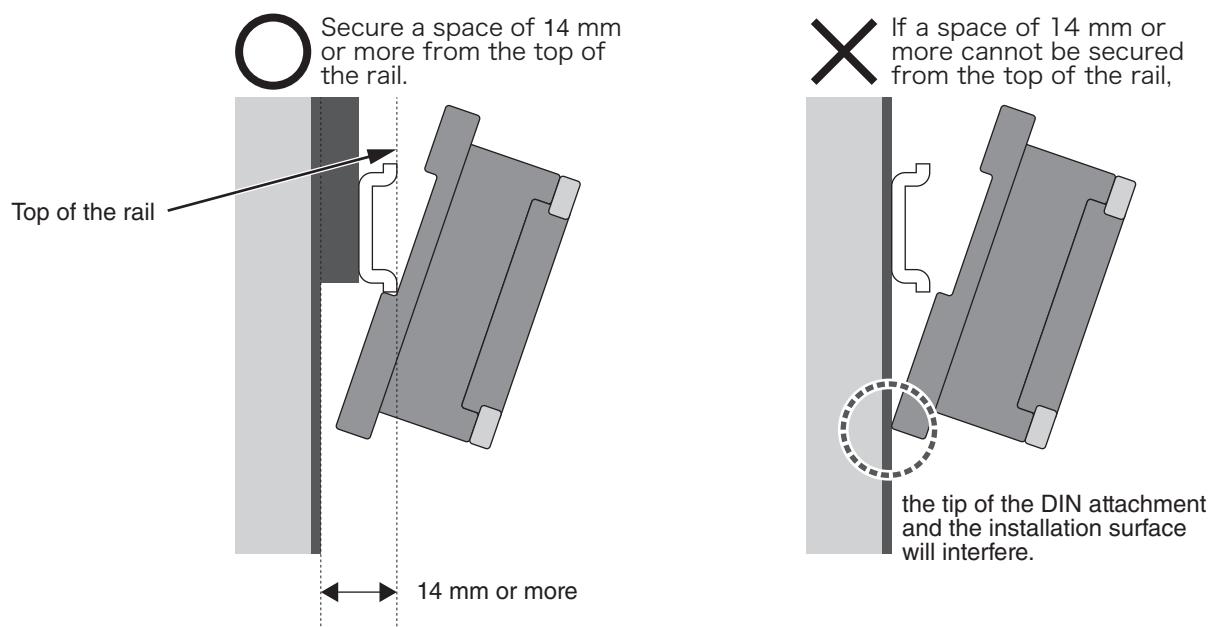


■ ATTENUATION vs. FREQUENCY CHARACTERISTICS


RSAN-2003

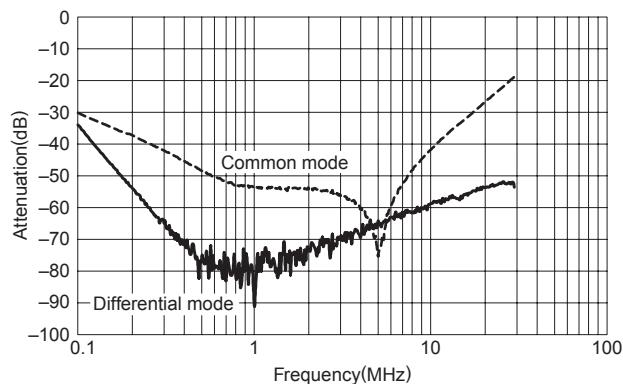


RSAN-2010

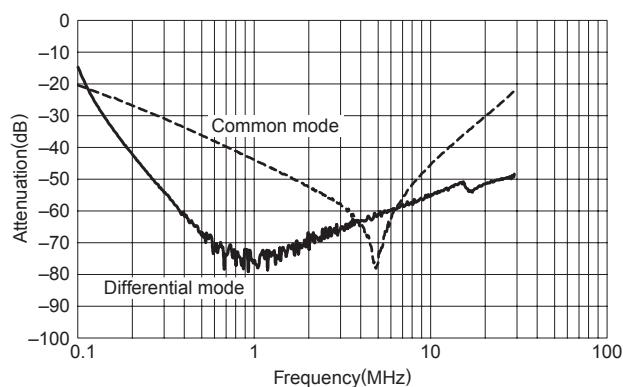


RSAN-2020

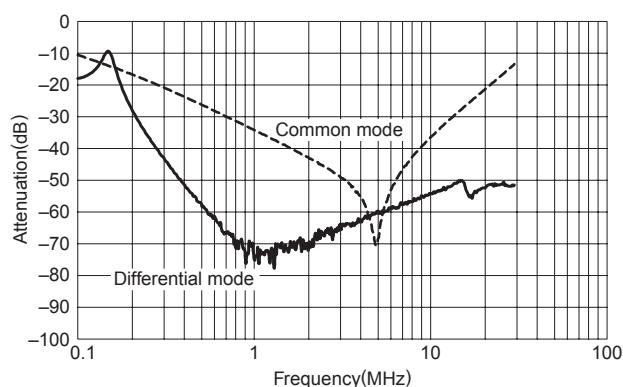


RSAN-2040

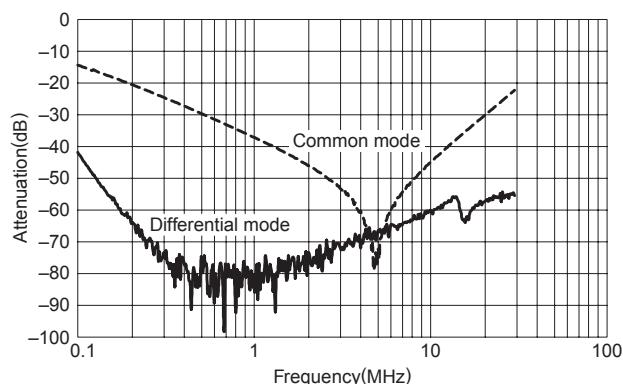


RSAN-2006

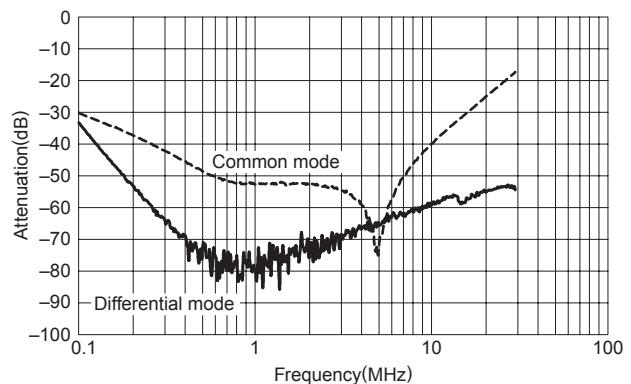


RSAN-2016

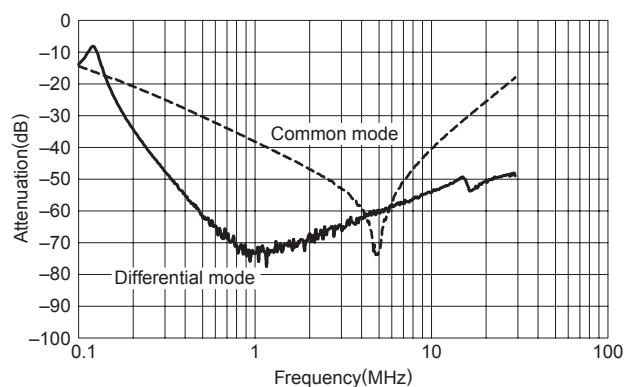


RSAN-2030

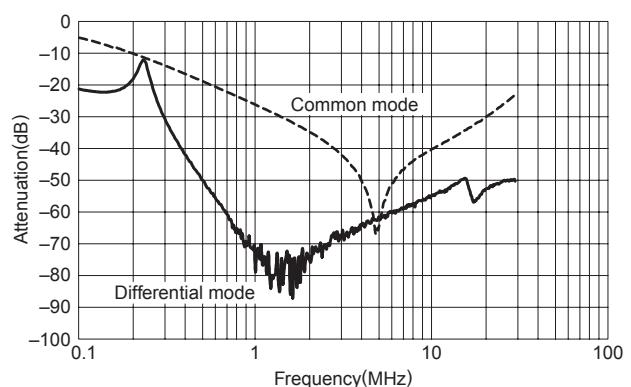


RSAN-2050

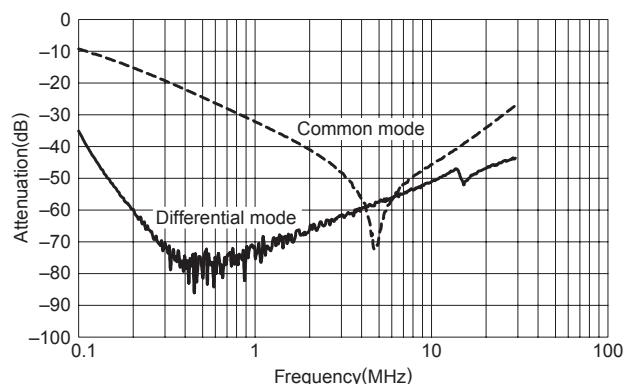


RSAN-2060

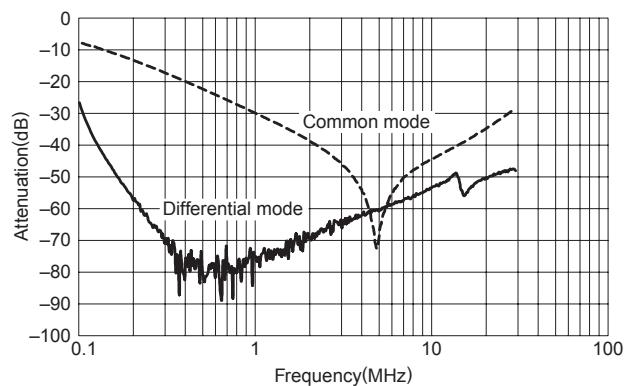


RSAN-2003L

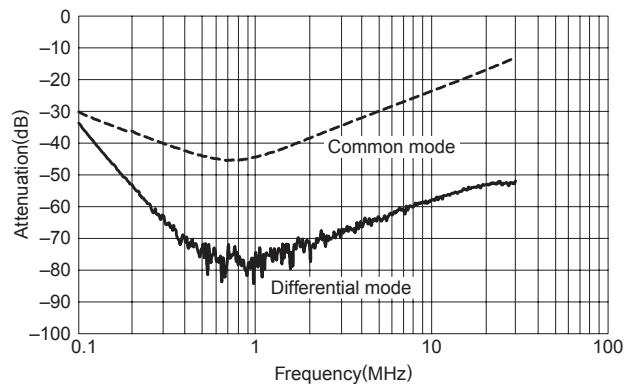


RSAN-2006L

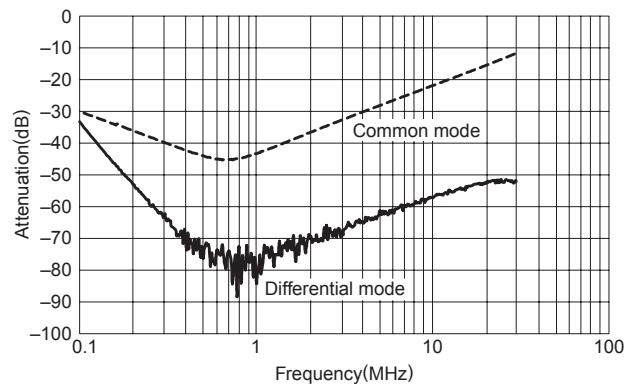


RSAN-2010L

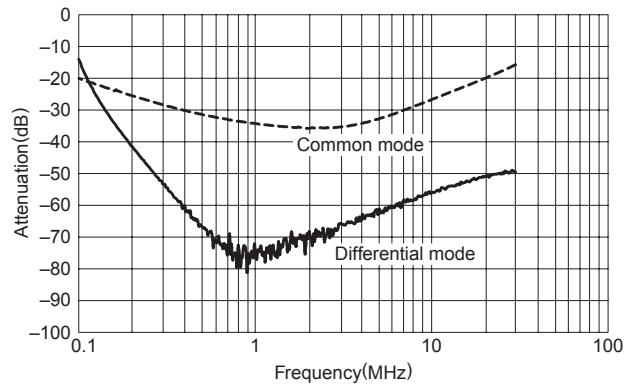


RSAN-2016L

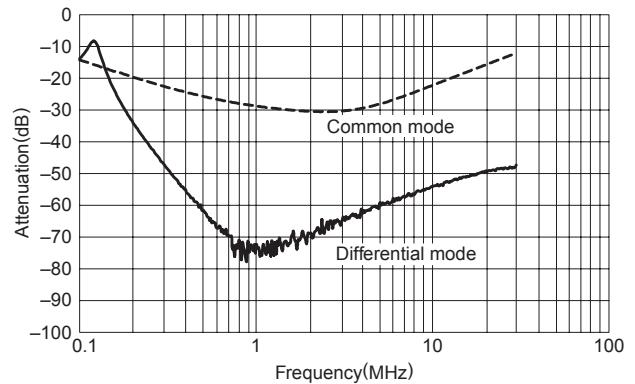

RSAN-2020L

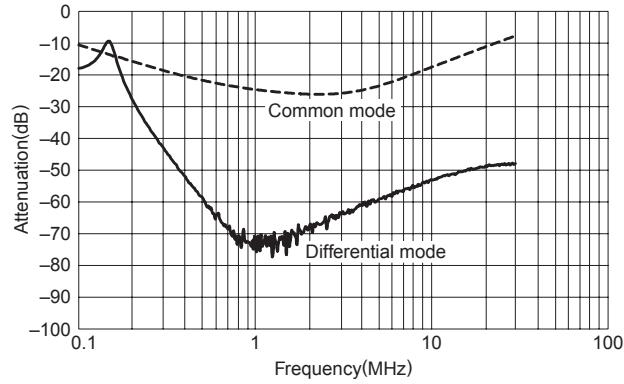


RSAN-2030L

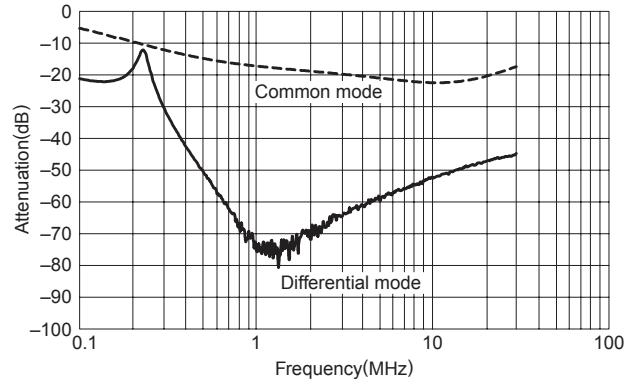


■ PULSE ATTENUATION CHARACTERISTICS


RSAN-2003/2003D

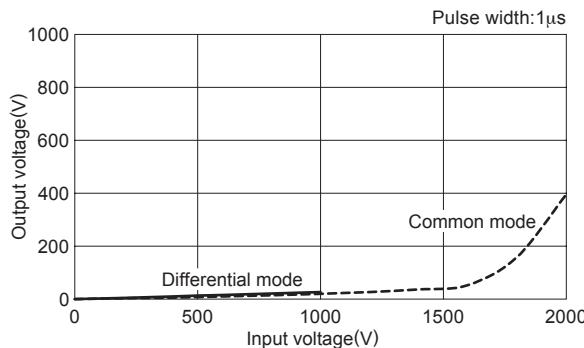


RSAN-2006/2006D

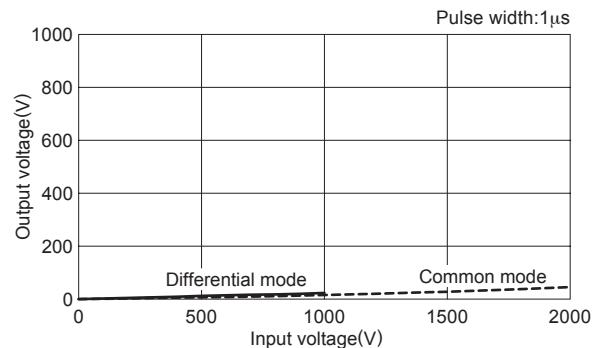


RSAN-2010/2010D

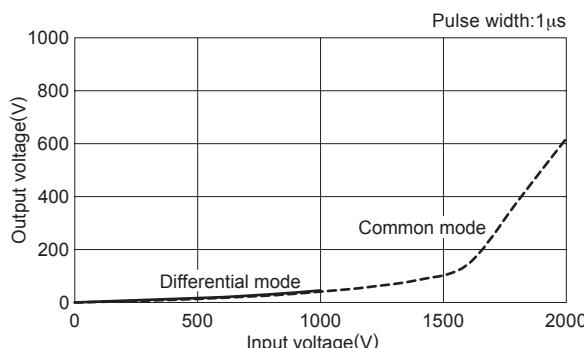


RSAN-2016/2016D

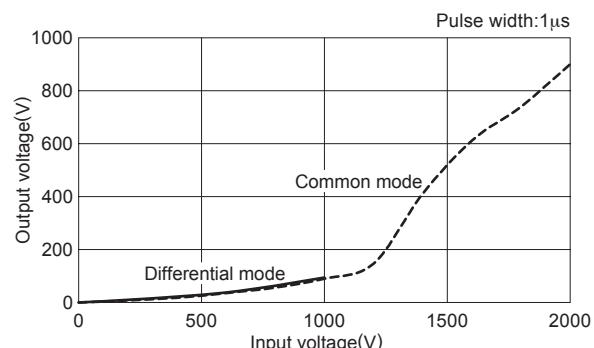


RSAN-2020/2020D

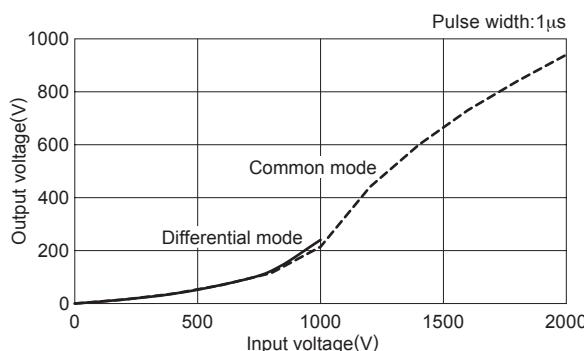


RSAN-2030/2030D

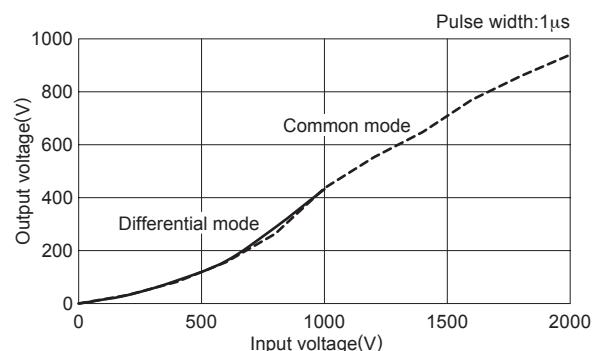


RSAN-2040

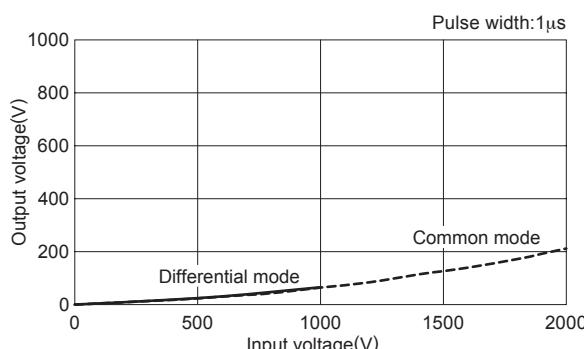


RSAN-2050

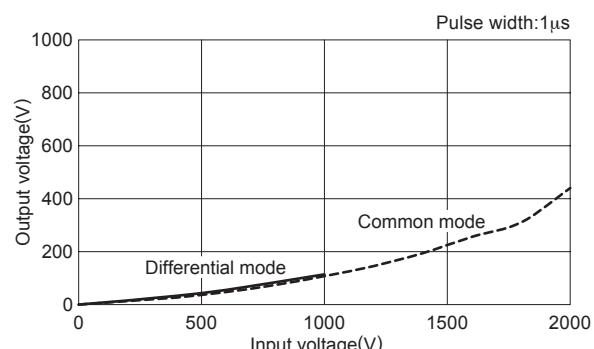


RSAN-2060

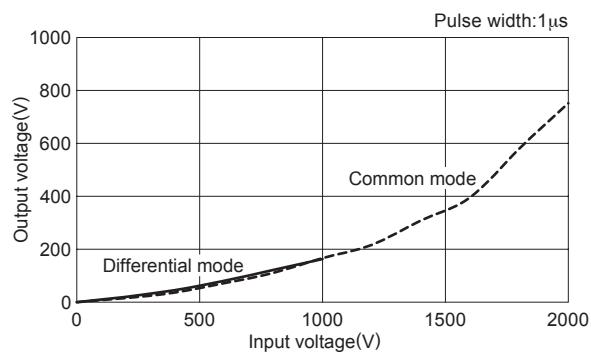


RSAN-2003L/LD

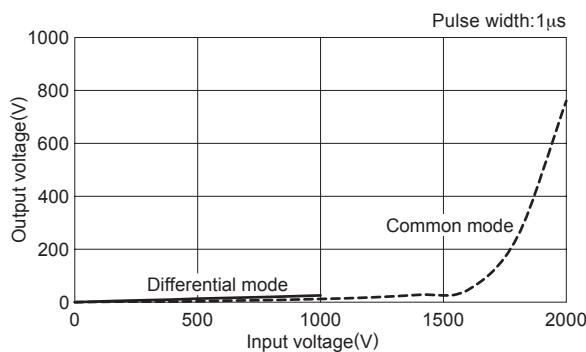


RSAN-2006L/LD

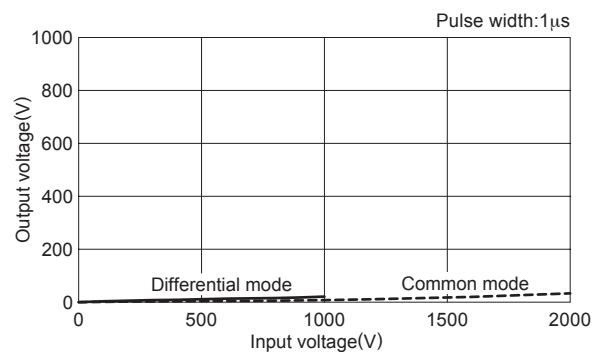


RSAN-2010L/LD

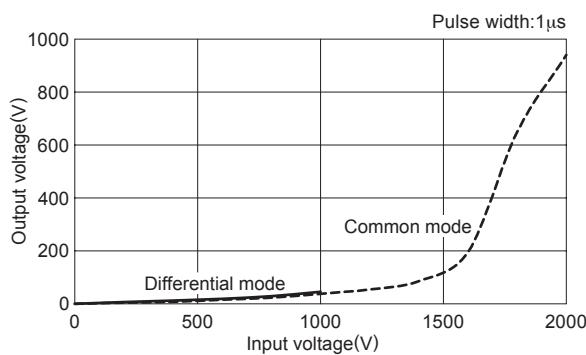

RSAN-2016L/LD

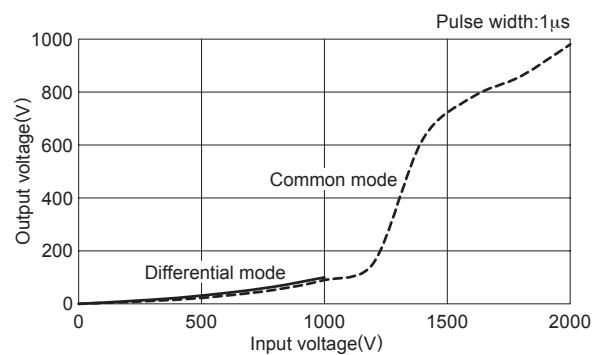

RSAN-2020L/LD

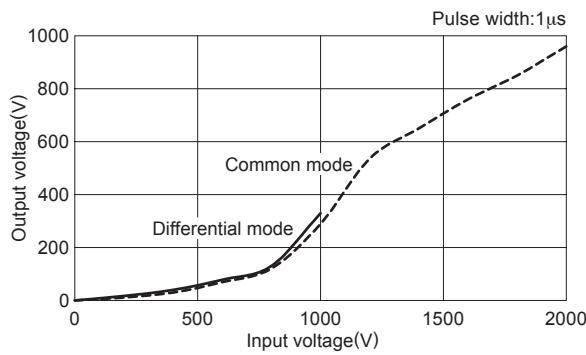

RSAN-2030L/LD

