

85W, 12A Non-Isolated SMT Point-Of-Load

<https://product.tdk.com/en/power/iCH>
www.emea.lambda.tdk.com/iCH



Industrial



Test



COMM



Broadcast

The iCH series of non-isolated Point-Of-Load (POL) converters provide localized voltage conversion from either a 5V or 12V bus. With its wide input and wide output voltage adjustment range, this compact-size and surface-mountable DC-DC module can deliver up to 85W making it a versatile solution for various board mount power requirements.

Features	Benefits
• DOSA Compatible Footprint	• Established Industry Footprint / Multisource
• Surface Mountable and Reflow Solder Compatible	• Ease of Manufacturing and Assembly
• Constant Switching Frequency	• Predictable EMI
• No External Loop Tuning Components Needed	• Simplifies Deployment and Saves Board Space
• Excellent Transient Response	• Stable / Reliable Output During Dynamic Load

Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Max Current (A)	Max Power (W)	On/Off Polarity	Efficiency Full Load (typ)
iCH12012A007V-006-R	4.5 - 14	0.7 - 8.5	12	85	Pos	97%
iCH12012A007V-007-R	4.5 - 14	0.7 - 8.5	12	85	Neg	97%

Preferred Model

Related Products

Type	Part Number	Description
Isolated DC-DC Converter	iQL	300W, Input 36-75V or 18-36V, Isolated Quarter Brick
Isolated DC-DC Converter	iQG	300W~504W, Input 36-75V, Isolated Quarter Brick
Isolated DC-DC Converter	iEH	300W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	GQA	120W Industrial, Input 9-36V, Isolated Quarter Brick
Non-Isolated DC-DC Converter	iAH	150W/40A, 3.5-17Vin, 0.7 - 5.0Vout, DOSA Compatible
Non-Isolated DC-DC Converter	iBH	80W/20A, 3.5-14Vin, 0.7 - 5.5Vout, DOSA Compatible
Non-Isolated DC-DC Converter	i3A	100W, Input 9-53V, Output 5-30V 4.5A or 3.3-16.5V 8A
Input Filter	iDQ	75V / 10A Filter


Specification		
Model		iCH
Input		
Input Voltage Range	Vdc	4.5 - 14
Input Current (max)	A	12
Turn-On Input Voltage (typ)	Vdc	4.2
Turn-Off Input Voltage (typ)	Vdc	4.0
Efficiency (typical)	%	88.5 - 97
Safety Certifications and Markings	-	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark and UKCA Mark
Output		
Output Voltage Initial Setpoint	%	± 2
Output Voltage Tolerance	%	± 3
Line Regulation (typ)	mV	5
Load Regulation (typ)	mV	6
Output Current (max)	A	12 (1)
Output Power (max)	W	85
External Load Capacitance	uF	200 - 2000
Ripple & Noise (typ)	mVpp	15
Transient Response		150 mV, 50 μs (25% to 75% step Load; 10A/μs, Vo = 1.8V)
Switching Frequency (fixed)	kHz	500
Overcurrent Protection Threshold (Hiccup)	A	22
Environmental		
Operating Temperature (Tc)	°C	-40 to 115
Storage Temperature	°C	-55 to 125
Humidity (non condensing)	%RH	10 - 95
Cooling	-	Convection or forced air (See product specifications for derating)
Isolation Voltage (Input to Output)	Vdc	NA
Isolation Resistance	MΩ	NA
Shock	-	MIL-STD-202G, Method 213B, Test Condition I
Vibration		MIL-STD-202G, Method 201A
Other		
Weight (max)	g	2.5
Size (LxWxH)	inch	0.48 x 0.48 x 0.335
	mm	12.2 x 12.2 x 8.5
Moisture Sensitivity Level		MSL 2
MTBF - Telcordia SR-332 (100% Load, 40°C)	MHrs	> 15
Warranty	yrs	3

Notes


- (1) Observe maximum power limit.
(2) See the website for detailed product [specifications](#).

Mechanical Specification

Outline Drawing

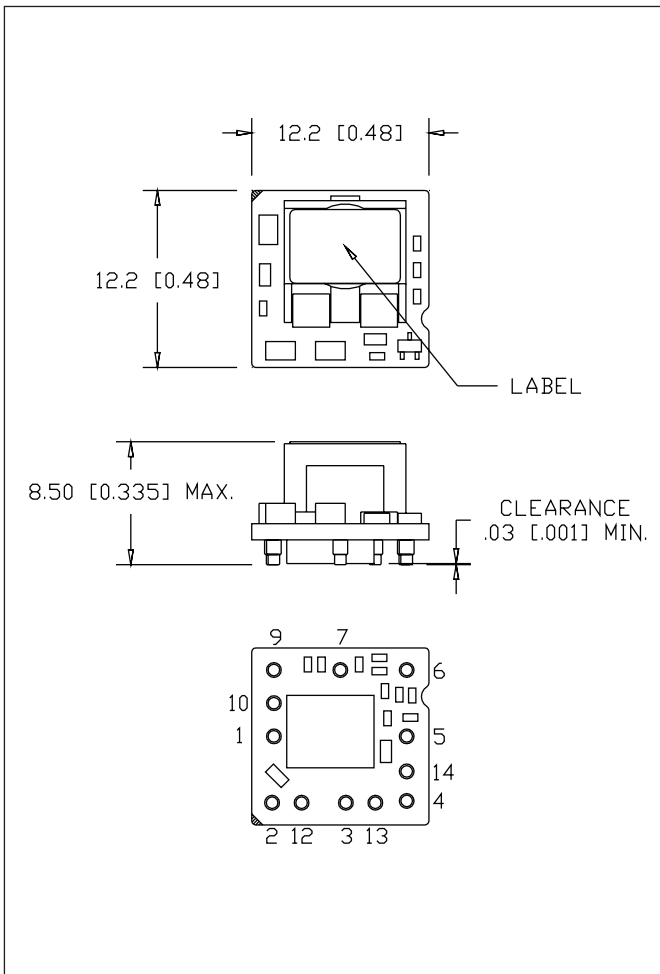


Recommended PCB Footprint

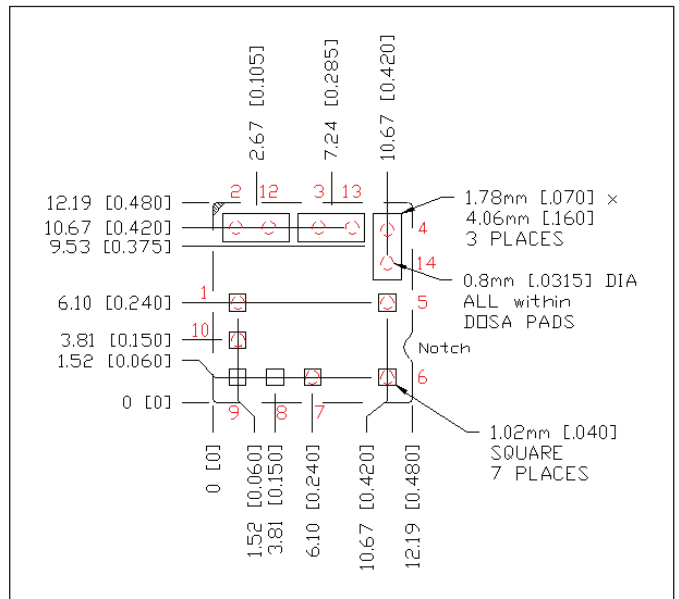

Pinout

PIN	Function	PIN	Function
1	ON / OFF	8	Not Fitted
2	VIN	9	Not Connected
3	GND	10	PWR GOOD
4	VOUT	11	Not Fitted
5	SENSE (+)	12	VIN
6	TRIM	13	GND
7	GND	14	VOUT

Output vs. Input Voltage Operating Range

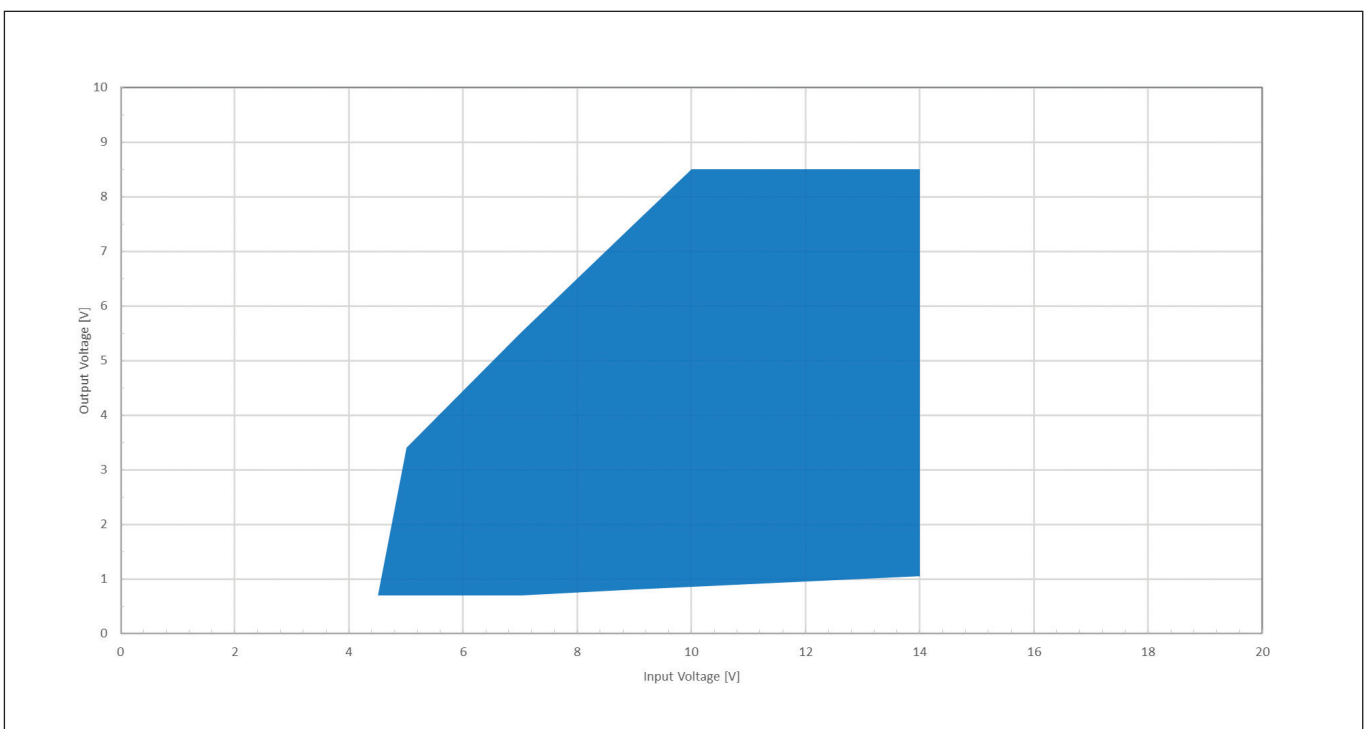



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
info@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
info@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
info@tdk-lambda.co.il
emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
tia.powersolutions@tdk.com
www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
sales.br@tdk-electronics.tdk.com
www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
tfc.powersolutions@tdk.com
www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
tis.marketing@tdk.com
www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
mathew.philip@tdk.com
www.sg.lambda.tdk.com

