



Barracuda

Part No: OMB.433.B03F21

Description

Barracuda - 433MHz 3dBi Omni Directional Outdoor Antenna with N Type Female Connector, U-Bolt, 523mm Length

Features:

Omni-Directional Radiation Pattern

Collinear

2dBi Peak gain, 433 MHz

Fiberglass Housing

Robust design for all weather operation.

IP65 Waterproof

Length: 553mm, Weight: 350g

N type Female connector

Wall/Pole Mount bracket included

RoHS & Reach Compliant



3. Antenna Characteristics 5 4. Radiation Patterns 8 5. Mechanical Drawing 10 6. Packaging 11	 Introduction Specification 	3
5. Mechanical Drawing 10 5. Packaging 11 7. Antenna Installation Guide 12		5
7. Antenna Installation Guide 12	4. Radiation Patterns	8
7. Antenna Installation Guide 12	5. Mechanical Drawing	10
	6. Packaging	11
Changelog 13	7. Antenna Installation Guide	12
	Changelog	13

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.











1. Introduction



The OMB.433.B03F21 is a fiberglass Omni-directional outdoor antenna, operating in the 433 MHz ISM band. The antenna is designed for applications such as metering, industrial / environmental monitoring, remote asset monitoring, and mesh network applications.


The OMB.433 operates at 433MHz, one of the most widely used license free ISM bands, with a 3dBi peak gain. The omni-directional antenna radiates uniformly in the azimuth. This collinear design characteristic provides the best performance, giving optimized coverage and therefore longer range in the horizontal plane over 360 degrees, thus minimizing the amount of nodes needed for a mesh network.

The UV resistant fiberglass housing enables the OMB antenna to be utilized in all kinds of harsh environments, making it more robust and safer than traditional whip antennas. It can be connected directly to the access point or telemetry unit, or can be mounted on wall or device surface via the N-type connector.

Another larger model, the OMB.433.B06F21 with 6dBi peak gain, also working in the 433MHz ISM band, is also available. Gain and connector customizable, subject to MOQ.



2. Specification




	Mechanical
Length	553 mm (Max)
Radome Diameter	24mm
Bracket Dimension	70 x 53mm (Max)
Antenna Weight	350g
Mounting Accessories Weight	70g
Application	Indoor/Outdoor
Radome Material	White Fiberglass
Bracket Material	Aluminium
Mount Style	Pole Mount/Wall Mount
U Bolt	Stainless Steel


Environmental	
Storage Temperature	-40°C to +85°C
Operating Temperature	-40°C to +85°C
Operating Humidity	10%~90% non-condensing
Storage Humidity	5%~90% non-condensing
Wind Resistance	>150mph (>241km/h)
Waterproof	IP65



3. Antenna Characteristics


3.1 Test Setup

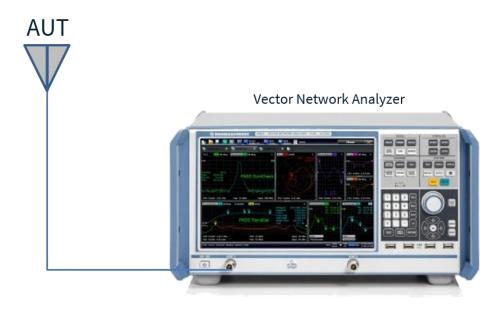

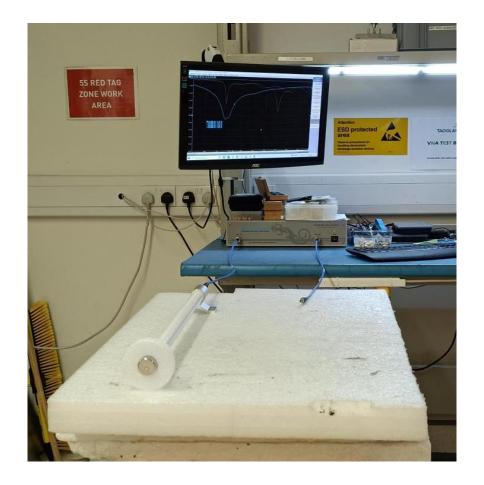




3.2 Return Loss

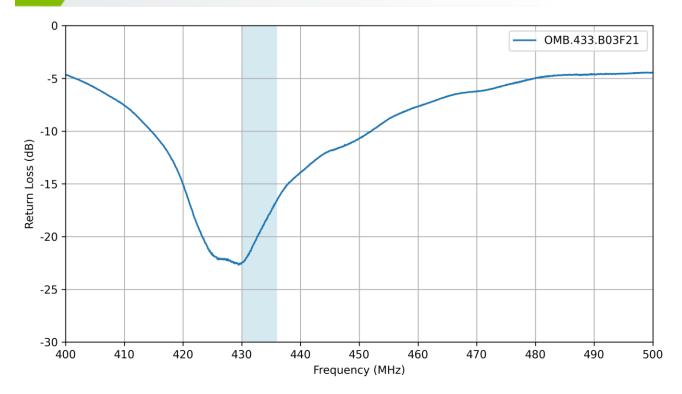


3.3 Efficiency

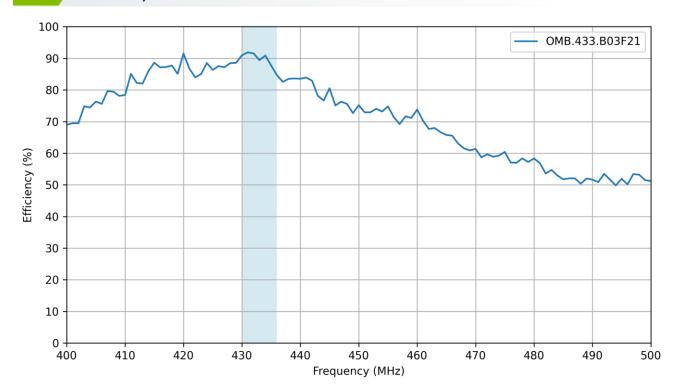




3.4 Average Gain

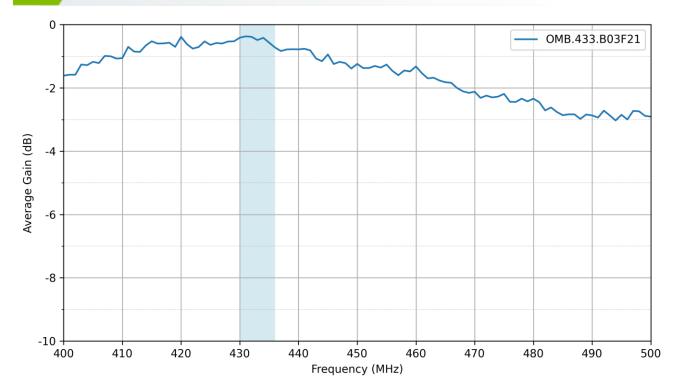


3.5 Peak Gain

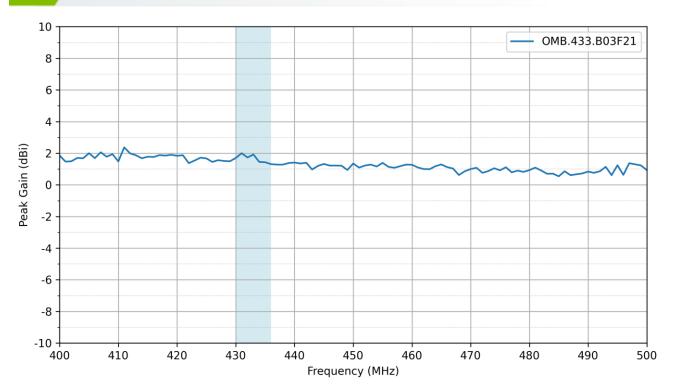



4. Radiation Patterns


4.1 Test Setup

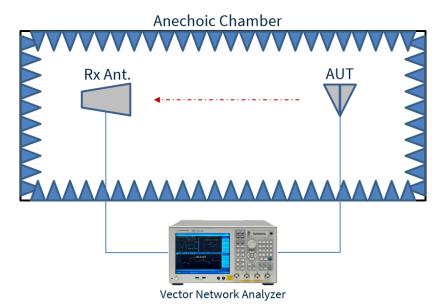







4.2 Patterns at 433 MHz

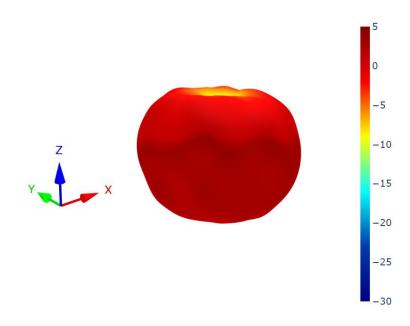

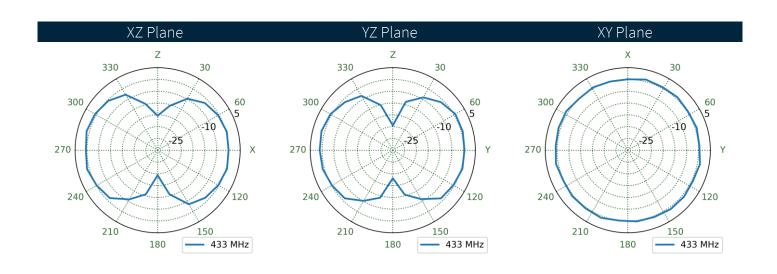



5. Mechanical Drawing

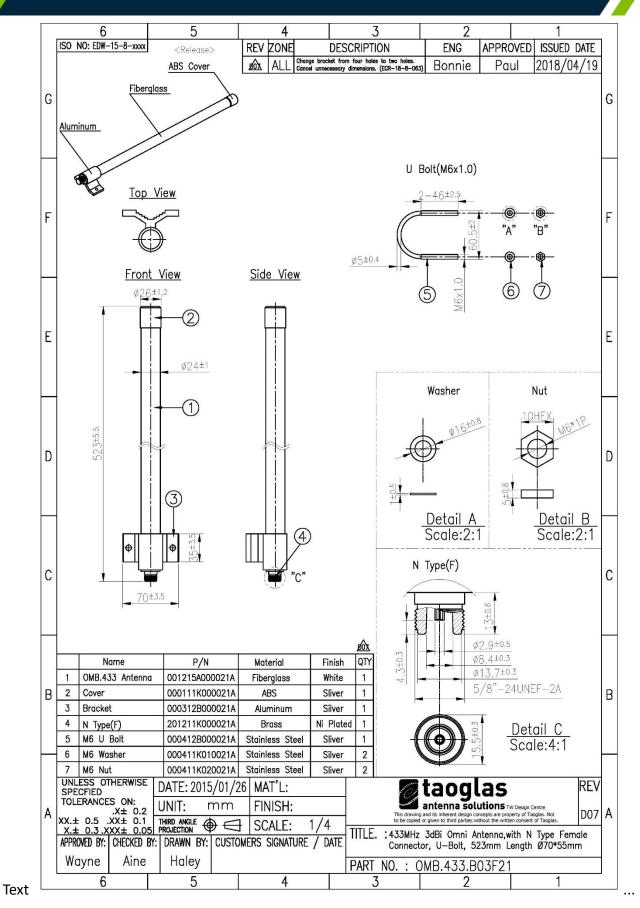

10




650mm

130mm

6. Packaging


1 OMB.433.B03F21 per PE Bag Bag Dimensions 130mm*650mm 1 PE Bag per Tube Tube Dimensions - Ø80mm*Height 585mm Total Weight - 620g

10 tubes per carton Carton Dimensions - 590*410*180mm Weight - 7.26Kg

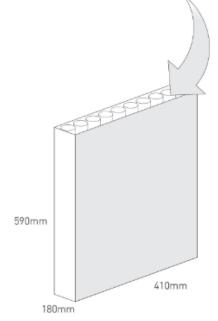


Ø80mm

Pallet dimensions 1200*1000*1410mm 28 Cartons per pallet

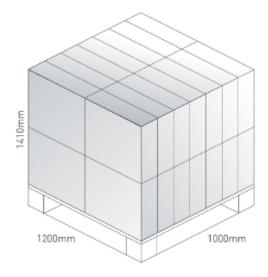



7. Antenna Installation Guide

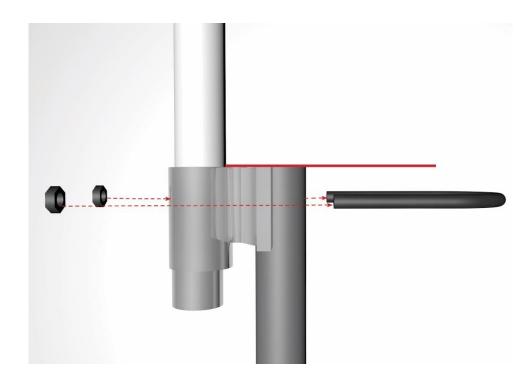



Changelog for the datasheet

SPE-16-8-019 - OMB.433.B03F21

Revision: G (Current Version)	
Date:	2023-11-09
Changes:	Full datasheet update
Changes Made by:	Gary West

Previous Revisions

Revision: F	
Date:	2019-09-02
Changes:	Updated template, added Return Loss, Efficiency, Average Gain
Changes Made by:	Yu Kai Yeung

Revision: A (Origina	l First Release)
Date:	2016-03-18
Notes:	
Author:	Unknown Author

Revision: E	
Date:	2018-05-23
Changes:	
Changes Made by:	Yu Kai Yeung

Revision: D	
Date:	2018-03-27
Changes:	Amended Installation
Changes Made by:	Jack Conroy

Revision: C	
Date:	2018-03-08
Changes:	Added Installation Guide
Changes Made by:	Jack Conroy

Date:	2016-08-17
Changes:	Updated drawings as per PCN
Changes Made by:	Andy Mahoney





www.taoglas.com

